



lilibet
FOCUS

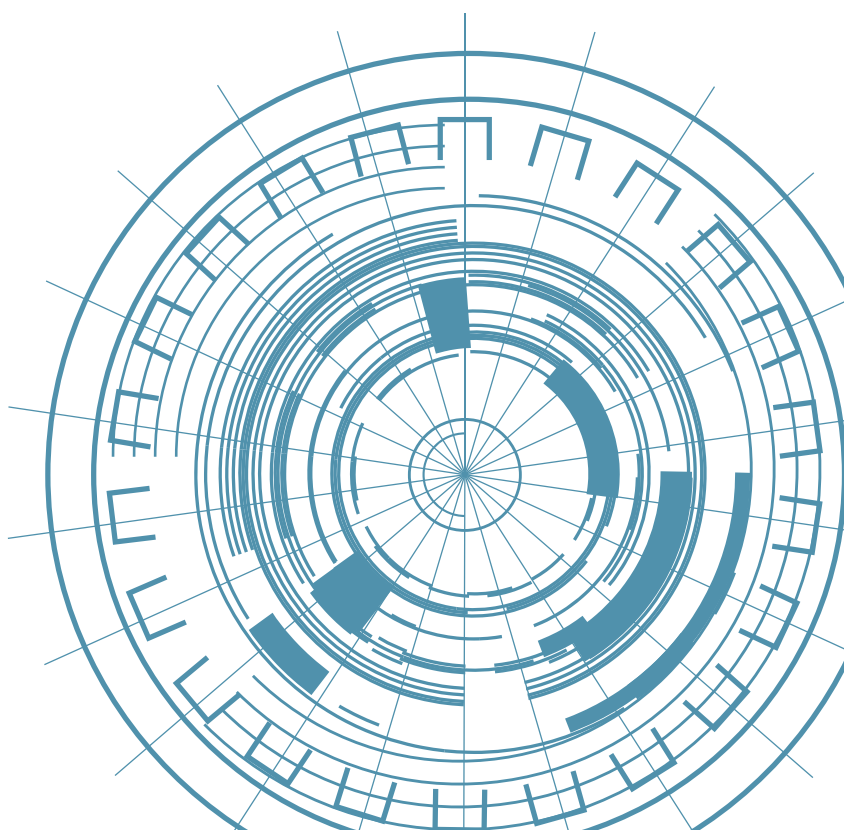

lilibet

Aufbauleuchte | Surface-mount luminaire | Luminaires en saillie | Apparecchio a plafone

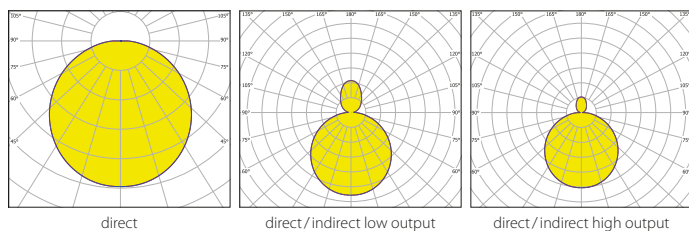

A++ **A**

230V IP20 IP54 $R_a > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000K, 4000K, dynamic white

up to 144lm/W

$R_a > 80$, MacAdam 3

non-dim/DALI

IEC 62471: Blue light hazard: RG0

Lifetime up to L80/50.000h

Optic

direct, direct/indirect

satiné




Options

Emergency lighting 3h

RAL of your choice

Rod suspension



Housing

powder coated

RAL 9006

RAL 9016

RAL 9005

1 Dimension

ø 330 mm (direct only)	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request	

3 Schutzart | Protection rating | Indice de protection | Grado di protezione

IP20	C
IP54 (direct only)	Q

4 direct | direct / indirect

direct	1
direct / indirect	2

5 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white (direct only)	HCL

6 Output

low output non-dim	L1
low output DALI	L3
high output DALI	H3
dynamic white (direct only)	X3

Beispiel | Example | Esempio

ø 420 mm, white, IP54, 4000 K, high output DALI


F52A042-9016Q1840H3S

Luminous Flux (lm)	direct		direct / indirect	
	high output	low output	high output	low output
4000 K satiné				
ø 330 mm	2069 lm	1060 lm	-	-
ø 420 mm	3110 lm	1697 lm	4160 lm	2782 lm
ø 620 mm	6480 lm	3165 lm	7524 lm	4324 lm
ø 920 mm	13117 lm	6609 lm	15141 lm	8799 lm
ø 1220 mm	23743 lm	12346 lm	25661 lm	14478 lm

System Power (W)	direct		direct / indirect	
	high output	low output	high output	low output
ø 330 mm	18,5 W	11 W	-	-
ø 420 mm	27 W	15 W	38 W	25 W
ø 620 mm	51 W	25 W	62 W	36 W
ø 920 mm	96 W	47 W	116 W	65 W
ø 1220 mm	172 W	86 W	191 W	104 W

COMPARE LIGHT COLOUR

Luminous Flux (lm)	3000 K direct		4000 K direct		dynamic white
satiné	high output	low output	high output	low output	2700-6500 K
ø 420 mm	29971 lm	1638 lm	3110 lm	1697 lm	2926 lm

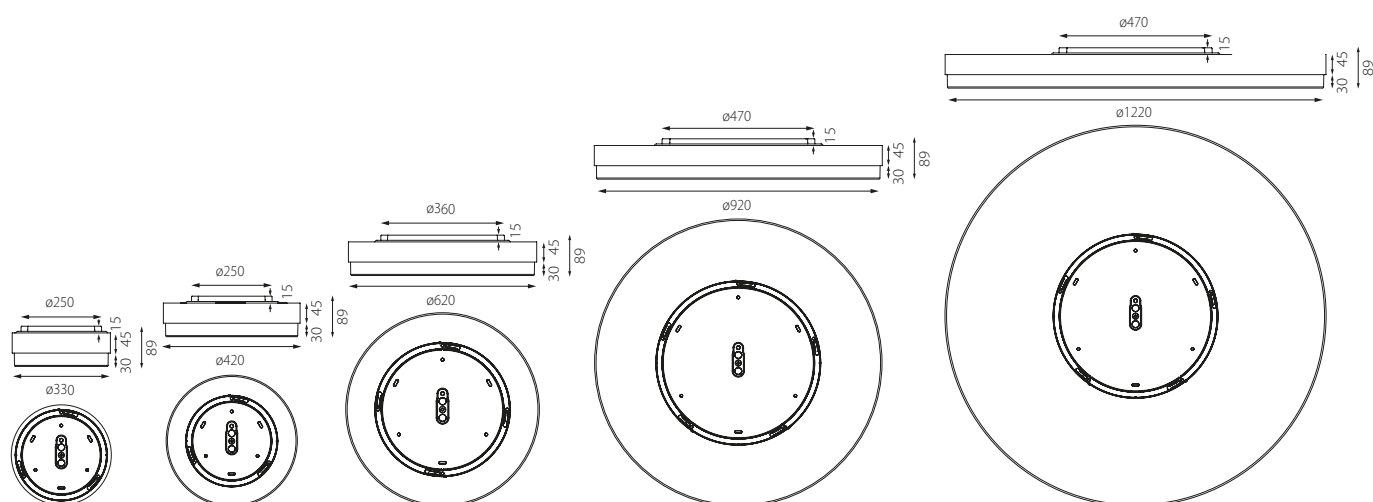







lilibet


Pende | Rod suspension | Suspensions rigide | Sospensione a tige rigido




direct



direct/indirect high output



direct/indirect low output

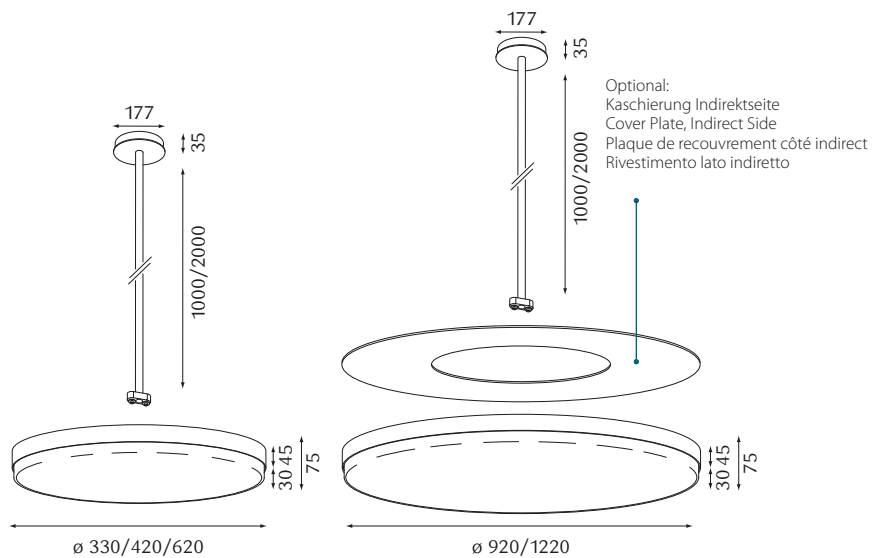

A++ A

230V IP20 $R_a > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000K, 4000K, dynamic white

up to 144lm/W

$R_a > 80$, MacAdam 3

non-dim/DALI

IEC 62471: Blue light hazard: RG 0

Lifetime up to L80/50.000h

Optic

direct, direct/indirect

satiné

Options

Emergency lighting 3h

RAL of your choice

Central suspension


Housing

powder coated

RAL 9006

RAL 9016

RAL 9005



1 Dimension

ø 330 mm	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request	

3 direct | direct / indirect

direct	1
direct / indirect	2

4 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white	HCL

5 Output

low output non-dim	L1
low output DALI	L3
high output DALI	H3
dynamic white (direct only)	X3

Beispiel | Example | Exemple | Esempio

ø 420 mm, white, direct, 4000 K, high output DALI

F52A042-9016C1840H3S

Luminous Flux (lm)	direct		direct / indirect	
	high output	low output	high output	low output
4000 K satiné				
ø 330 mm	2069 lm	1060 lm	-	-
ø 420 mm	3110 lm	1697 lm	4160 lm	2782 lm
ø 620 mm	6480 lm	3165 lm	7524 lm	4324 lm
ø 920 mm	13117 lm	6609 lm	15141 lm	8799 lm
ø 1220 mm	23743 lm	12346 lm	25661 lm	14478 lm

System Power (W)	direct			direct / indirect	
	high output	low output	dynamic white	high output	low output
ø 330 mm	18,5 W	11 W	19 W	-	-
ø 420 mm	27 W	15 W	27 W	38 W	25 W
ø 620 mm	51 W	25 W	52 W	62 W	36 W
ø 920 mm	96 W	47 W	96 W	116 W	65 W
ø 1220 mm	172 W	86 W	172 W	191 W	104 W

COMPARE LIGHT COLOUR

Luminous Flux (lm)	3000 K		4000 K		dynamic white
	high output	low output	high output	low output	2700-6500 K
satiné					
ø 420 mm direct	2997 lm	1638 lm	3110 lm	1697 lm	2926 lm
ø 420 mm di / id	3941 lm	2615 lm	4160 lm	2782 lm	-

Weight (kg)

ø 330 mm	4,8 kg
ø 420 mm	5,4 kg
ø 620 mm	10,2 kg
ø 920 mm	16,5 kg
ø 1220 mm	22,7 kg



Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali


920 mm Cover Plate, Indirect Side	white	F50-KAS-092-9016
	silver	F50-KAS-092-9006
	black	F50-KAS-092-9005
1220 mm Cover Plate, Indirect Side	white	F50-KAS-122-9016
	silver	F50-KAS-122-9006
	black	F50-KAS-122-9005
1000 mm Rod Suspension	white	F50-PEN-100-9016
	silver	F50-PEN-100-9006
	black	F50-PEN-100-9005
2000 mm Rod Suspension	white	F50-PEN-200-9016
	silver	F50-PEN-200-9006
	black	F50-PEN-200-9005

Weight (kg)


920 mm Cover Plate	1,5 kg
1220 mm Cover Plate	3,2 kg
1000 mm Rod Suspension	0,5 kg
2000 mm Rod Suspension	0,7 kg

lilibet


Hängeleuchte | Pendant luminaire | Suspensions | Sospensione




direct




direct/indirect high output



direct/indirect low output

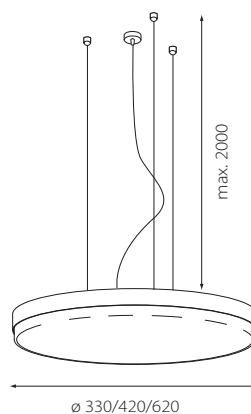

ø 330/420/620

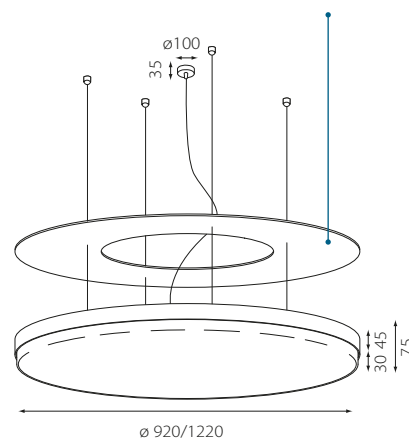

Optional:
Kaschierung Indirektseite
Cover Plate, Indirect Side
Plaque de recouvrement côté indirect
Rivestimento lato indiretto

A++ A

230V IP20 $R_a > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000K, 4000K, dynamic white

up to 139lm/W

$R_a > 80$, MacAdam 3

non-dim/DALI

IEC 62471: Blue light hazard: RG 0

Lifetime up to L80/50.000h

Optic

direct

direct/indirect

satiné


Options

Emergency lighting 3h

RAL of your choice

7 cable colours

Central & Rod suspension



Housing

powder coated

RAL 9006

RAL 9016

RAL 9005

1 Dimension

ø 330 mm (direct only)	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request	

3 direct | direct / indirect

direct	1
direct / indirect	2

4 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white	HCL

5 Output

low output non-dim	L1
low output DALI	L3
high output DALI	H3
dynamic white (direct only)	X3

Beispiel | Example | Exemple | Esempio

ø 420 mm, white, direct, 4000 K, high output DALI

F52H042-9016C1840H3S

Luminous Flux (lm)

	direct			direct / indirect	
	high output	low output	dynamic white	high output	low output
4000 K satiné					
ø 330 mm	2069 lm	1060 lm	1947 lm	-	-
ø 420 mm	3110 lm	1697 lm	2926 lm	4899 lm	2782 lm
ø 620 mm	6480 lm	3165 lm	5901 lm	9150 lm	5899 lm
ø 920 mm	13117 lm	6609 lm	12343 lm	16772 lm	10327 lm
ø 1220 mm	23743 lm	12346 lm	21547 lm	27291 lm	16008 lm

Weight (kg)

ø 330 mm	4,8 kg
ø 420 mm	5,4 kg
ø 620 mm	10,2 kg
ø 920 mm	16,5 kg
ø 1220 mm	22,7 kg

System Power (W)

	direct			direct / indirect	
	high output	low output	dynamic white	high output	low output
ø 330 mm	18,5 W	11 W	19,5 W	-	-
ø 420 mm	27 W	15 W	27 W	46 W	25 W
ø 620 mm	51 W	25 W	53 W	78 W	51 W
ø 920 mm	96 W	47 W	99 W	135 W	85 W
ø 1220 mm	172 W	86 W	182 W	209 W	124 W

COMPARE LIGHT COLOUR

Luminous Flux (lm)

	3000 K		4000 K		dynamic white
	high output	low output	high output	low output	2700-6500 K
satiné					
ø 420 mm direct	2997 lm	1638 lm	3110 lm	1697 lm	2926 lm
ø 420 mm di / id	4670 lm	2649 lm	4899 lm	2782 lm	-




Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

920 mm Cover Plate, Indirect Side	white	F50-KAS-092-9016
	silver	F50-KAS-092-9006
	black	F50-KAS-092-9005
1220 mm Cover Plate, Indirect Side	white	F50-KAS-122-9016
	silver	F50-KAS-122-9006
	black	F50-KAS-122-9005

Weight (kg)

920 mm Cover Plate	1,5 kg
1220 mm Cover Plate	3,2 kg

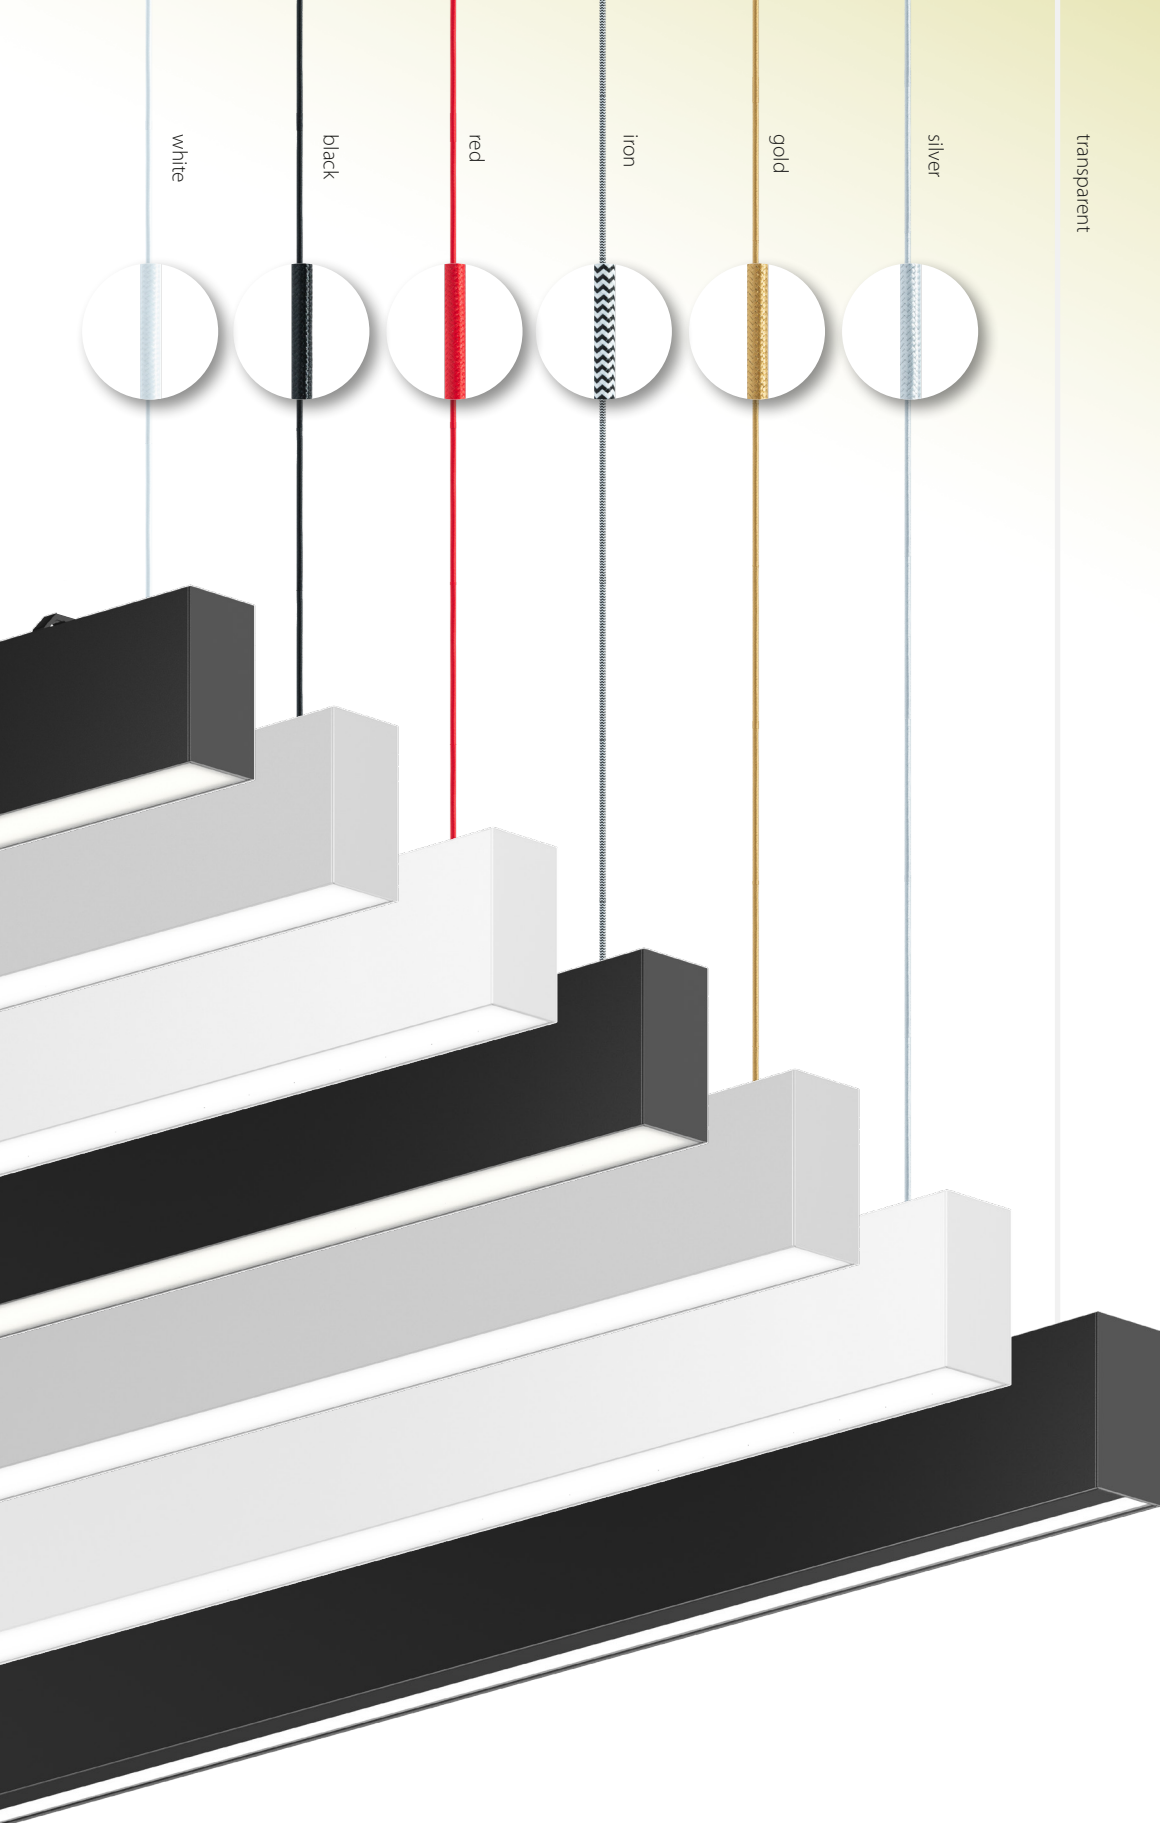

white

black

red

iron

gold

silver

transparent



CABLE COLOURS
SELECTION

Optionale Ausführung | Optional version | Version optionnelle | Versione opzionale

Einspeiskabel
Suspension cable
Câble d'alimentation
Cavo di alimentazione

2500 mm
5 x 0,75 mm²

▷ white	T65-EIN-WHITE
▷ black	T65-EIN-BLACK
▷ red	T65-EIN-RED
▷ iron	T65-EIN-IRON
▷ gold	T65-EIN-GOLD
▷ silver	T65-EIN-SILVER



Transparent cable incl. (standard version)

90

HOUSING COLOURS
SELECTION





Headquarters & Production

6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com, www.planlicht.com

