

meteor HIGHLIGHTS



meteor

Strahler | Spotlight | Projecteur | Proiettore



meteor
3-phase tracklight











meteor AB
surface mounted



meteor flip
recessed



meteor EB
recessed

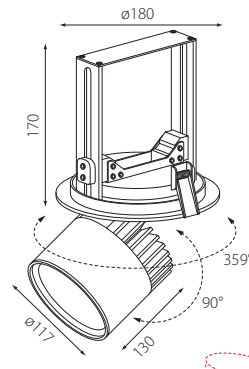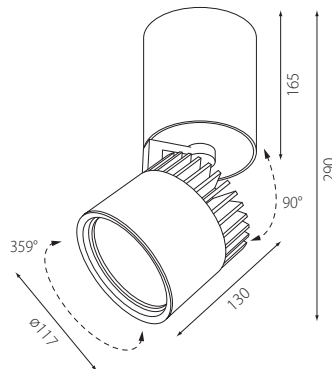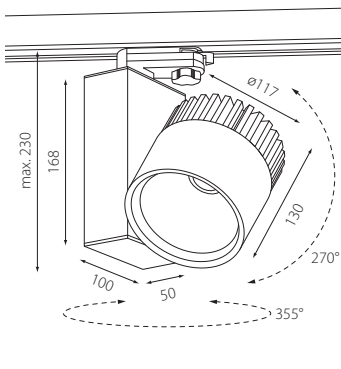

Housing

Powder coated die-cast aluminium

230V IP20 $R_a > 80/90$ up to L90/50.000h MacAdam 3 DALI



LED

2700K, 3000K, 3500K, 4000K
Food & Fashion | Aliments & Mode

up to 148lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI dim

Blue light hazard: $RG \leq 1$ IEC 62471

Lifetime

up to L90/50.000h

Optic

Reflector: 15°, 26°, 38°

Options

Honeycomb glare protection, Oval spot lens, Clear protective glass, Blur glass

Flexibility

rotatable up to 355°, adjustable up to 90°, 270° (3-phase tracklight)



meteor **HIGHLIGHTS**




12 different LED modules, high CRI



Several beam angles



Special light colours (food)

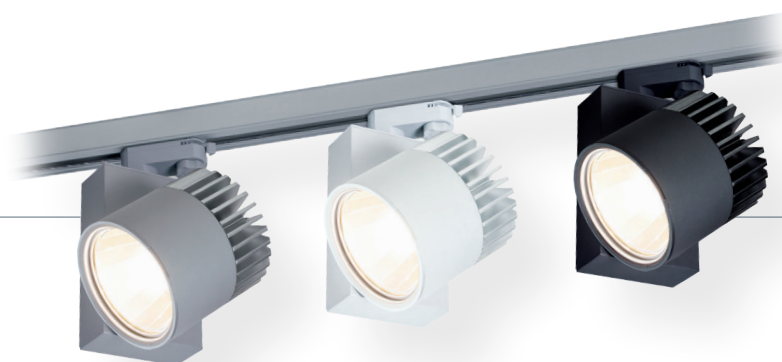

pan up to 355°
tilt up to 270°



4 different
mounting versions



Honeycomb louvre
and lenses



Telia, Finland