

zenit
HIGHLIGHTS





Housing

Powder coated die-cast aluminium

230V IP20 $R_a > 80/90$ up to L90/50.000h MacAdam 3 DALI



LED

2700K, 3000K, 3500K, 4000K
Food & Fashion | Aliments & Mode

up to 131 lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI dim

Blue light hazard: $RG \leq 1$ IEC 62471

Lifetime

up to L90/50.000h

Optic

Reflector: 23°, 40°, 60°

Options

Honeycomb glare protection, Oval spot lens, Clear protective glass, Blur glass

Flexibility

rotatable up to 355°, adjustable up to 90°



zenit **HIGHLIGHTS**



12 different LED modules, high CRI




Several beam angles




Honeycomb louvre and lenses



Special light colours (food & fashion)



pan up to 355°
tilt up to 90°












Inset versions
S & XS for pure 3



Driver inside housing
or in track (zenit S)

zenit L & M

Strahler | Spotlight | Projecteur | Proiettore




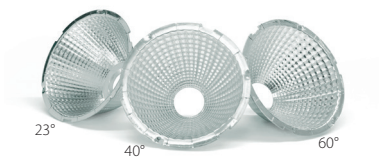
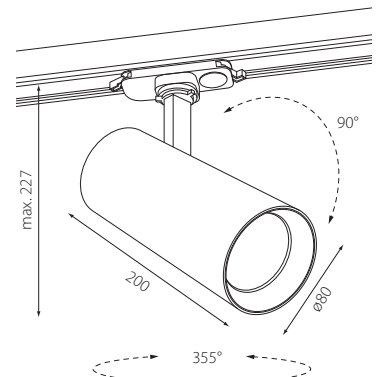
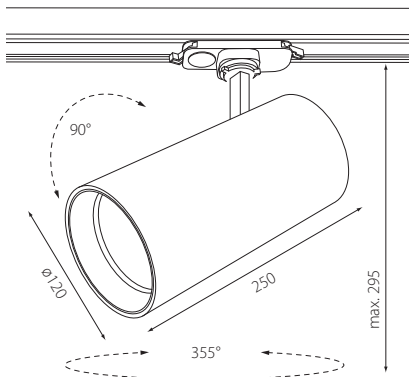


zenit S

Strahler | Spotlight | Projecteur | Proiettore





Driver in track

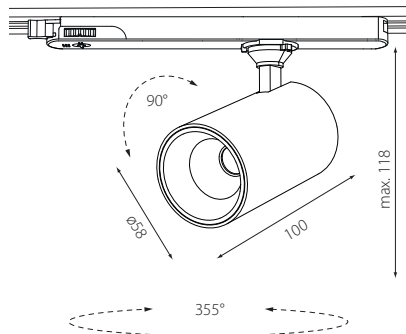


zenit S


inset pure 3



16°



23°



40°

zenit XS

inset pure 3

