



zenit N

COMPACT, YET POWERFUL

A brand new member of the ZENIT spotlight family: Thanks to its track integrated driver ZENIT N combines compact design with high performance. With up to 105 lumen/watt ZENIT N sets the benchmark for highly efficient LED spotlights.

Swivel arm

Compact design

40° beam angle

Track integrated driver

Color rendering index > 90



FLEXIBILITY

The swivel arm of ZENIT N allows you to 90° tilt and 355° rotate the spotlight.



zenit N

Strahler | Spotlight | Projecteur | Proiettore

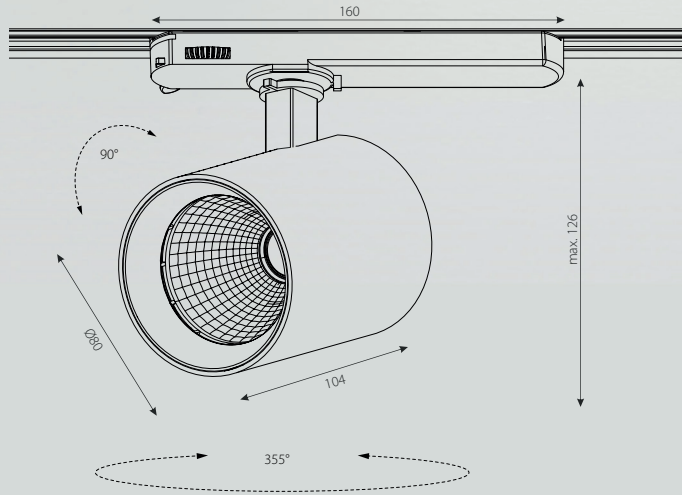

LED
3000 K, 4000 K
up to 105 lm/W
R_a > 90, MacAdam 3
non-dim
Blue light hazard: RG≤1 IEC 62471

Optic
Reflector: 40°
Flexibility
rotatable up to 355°, adjustable up to 90°
Lifetime
up to L90/50.000 h

Options
Honeycomb glare protection
Oval spot lens
Clear protective glass
Blur glass

Housing
powder coated
RAL 9016
RAL 9005



R_a > 90 | 230V | IP20 | up to L90/50.000h | MacAdam 3



zenit N S10S104-1 C1 2 3 4 5

1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo
weiß | white | blanc | bianco
schwarz | black | noir | nero
SWWS
SWSW



2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore
LF930 3000 K **930**
LF940 4000 K **940**

3 Output
high output **H**

4 non-dim
non-dim **1**

5 Reflektor | Reflector | Réflecteur | Riflettore
40° **4**

Beispiel | Example | Exemple | Esempio
white, LF940, high output, non-dim, 40°
S10S104-**SWWS**-C1**940H14**

Luminous Flux (lm)		System Power	Reflector	Weight
LF930 3000 K	2680 lm	27 W	40°	0.54 kg
LF940 4000 K	2821 lm	27 W	40°	0.54 kg

Optionales Zubehör Optional accessory Accessoires optionnels Accessori opzionali	
Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-80
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-80
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-80

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Treiber in Schienen-Adapter integriert.
Replacement of the reflector without the use of any tools.
Passive cooling. Track-integrated driver.
Remplacement du réflecteur sans outil.
Refroidissement passif. Driver intégré dans l'adaptateur de rail.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Driver integrato nell'adattatore del binario.

OTHER ZENIT SPOTLIGHTS



zenit L
Ø 120 mm
L= 250 mm

zenit M
Ø 80 mm
L= 200 mm

zenit S
Ø 58 mm
L= 100 mm

zenit XS
Ø 40 mm
L= 70 mm



OPTIONAL
ACCESSORIES

- Honeycomb glare protection
- Oval spot lens
- Clear protective glass
- Blur glass





WWW.PLANLICHT.COM