




zenit N

COMPACT, YET POWERFUL

A brand new member of the ZENIT spotlight family: Thanks to its track integrated driver ZENIT N combines compact design with high performance. With up to 105 lumen/watt ZENIT N sets the benchmark for highly efficient LED spotlights.

Track integrated driver

Color rendering index > 90

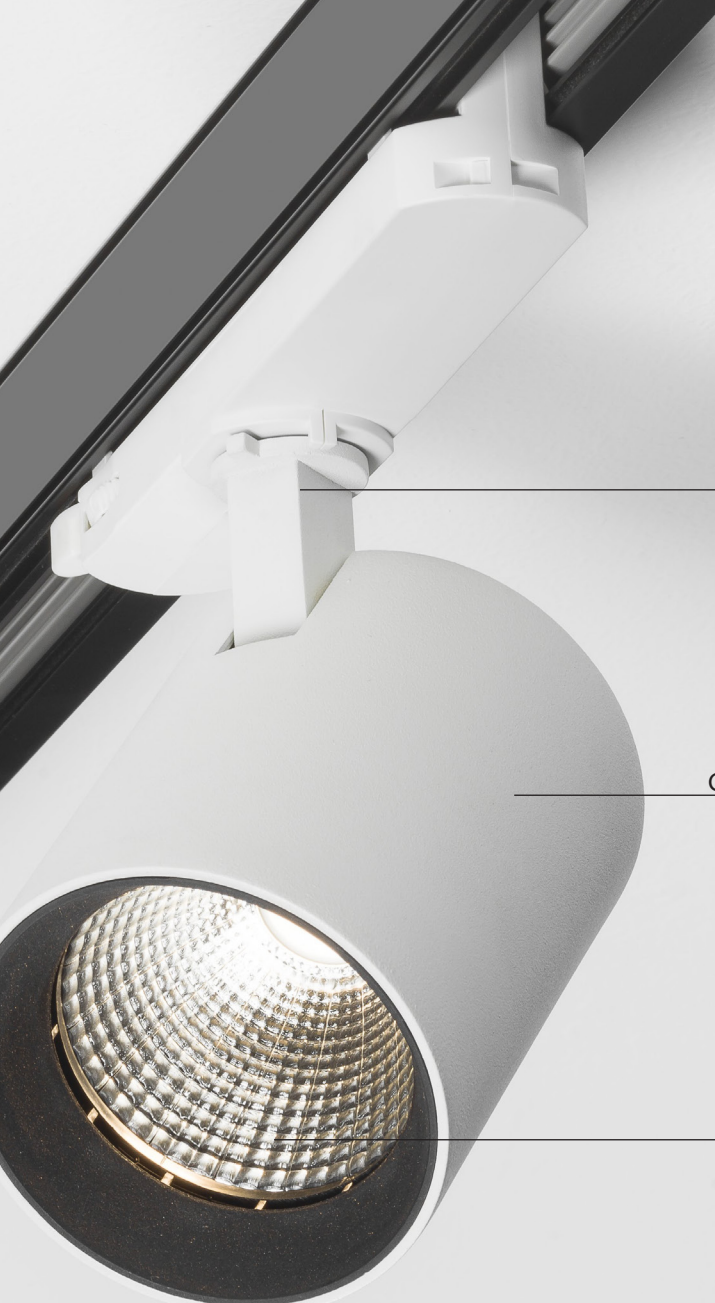


Swivel arm


Compact design

40° beam angle


FLEXIBILITY

The swivel arm of ZENIT N allows you to 90° tilt and 355° rotate the spotlight.





40°

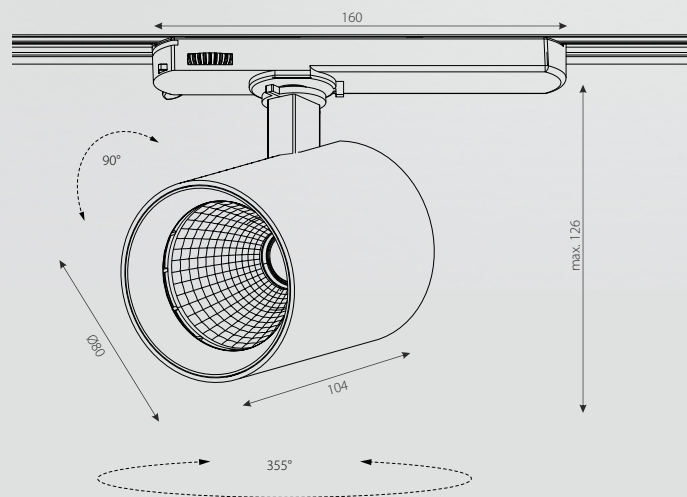

LED

3000 K, 4000 K
up to 105 lm/W
 $R_a > 90$, MacAdam 3
non-dim
Blue light hazard: $RG \leq 1$ IEC 62471

Optic

Reflector: 40°

Flexibility

rotatable up to 355°, adjustable up to 90°

Lifetime

up to L90/50.000h

Options

Honeycomb glare protection
Oval spot lens
Clear protective glass
Blur glass

Housing

powder coated
RAL 9016 
RAL 9005 



 $R_a > 90$ | 230V | IP20 | up to L90/50.000h | MacAdam 3



1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß | white | blanc | bianco

SWWS

schwarz | black | noir | nero

SWSW

**3 Output**

high output

H

4 non-dim

non-dim

1

5 Reflektor | Reflector | Réflecteur | Riflettore

40°

4

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF930 3000 K

930

LF940 4000 K

940

Beispiel | Example | Exemple | Esempio

white, LF940, high output, non-dim, 40°

S10S104-SWWS-C1940H14

Luminous Flux (lm)		System Power	Reflector	Weight
LF930 3000 K	2680 lm	27 W	40°	0.54 kg
LF940 4000 K	2821 lm	27 W	40°	0.54 kg

Optionales Zubehör | Optional accessory | Accessoires optionnels | Accessori opzionali

Blendschutz-Wabenraster | Honeycomb glare protection | Filtre anti-éblouissement nid d'abeilles | Filtro anti-abbagliamento a nido d'ape

S10-BLE-80

Ovalzeichnerlinse | Oval spot lens | Lentille ovalisante | Lenti ovalizzanti

S10-OZL-80

Klares Schutzglas | Clear protective glass | Verre de protection transparent | Vetro di protezione trasparente

S10-SGL-80

Weichzeichnerglas | Blur glass | Verre effet flou | Vetro con effetto sfocatura

S10-WGL-80

Reflektortausch werkzeuglos möglich.

Passive Kühlung. Treiber in Schienen-Adapter integriert.

Replacement of the reflector without the use of any tools.

Passive cooling. Track-integrated driver.

Remplacement du réflecteur sans outil.

Refroidissement passif. Driver intégré dans l'adaptateur de rail.


Sostituzione del riflettore senza utensili.

Raffreddamento passivo. Driver integrato nell'adattatore del binario.

OTHER ZENIT SPOTLIGHTS



zenit L
Ø 120 mm
L= 250 mm




zenit M
Ø 80 mm
L= 200 mm



zenit S
Ø 58 mm
L= 100 mm



zenit XS
Ø 40 mm
L= 70 mm

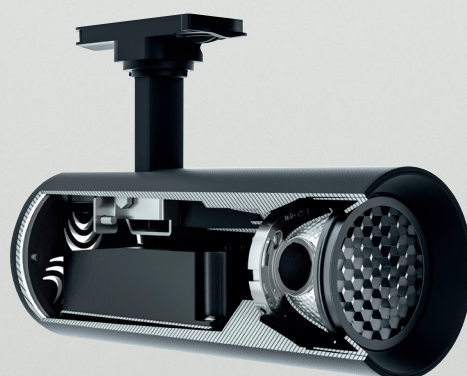

OPTIONAL ACCESSORIES

Honeycomb glare protection

Oval spot lens

Clear protective glass

Blur glass





WWW.PLANLICHT.COM