



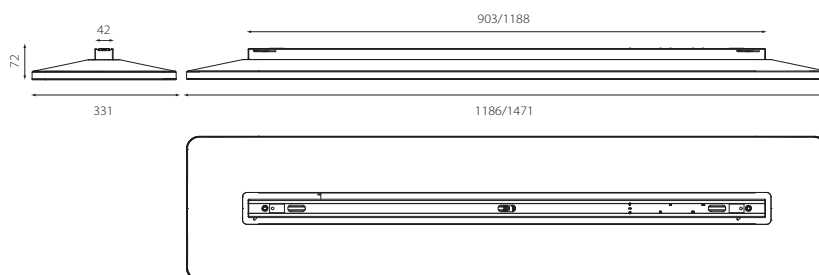

skai

skai

Aufbauleuchte | Surface-mount luminaire | Luminaires en saillie | Apparecchio a plafone

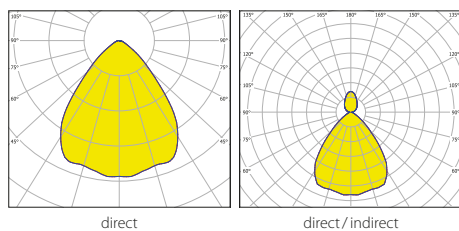

Design: Kai Stania



230V IP20 $R_a > 80$ UGR < 16 up to L90/50.000h MacAdam 3 DALI switchDIM



LED

3000K, 4000K, dynamic white

up to 145 lm/W, up to 5087 lm/m

$R_a > 80$, UGR < 16, MacAdam 3

non-dim/DALI

IEC 62471: Blue light hazard: RG 0

Lifetime up to L90/50.000h

Optic

direct

direct/indirect

unique lens-technology

Options

Motion and day-light sensor


Housing

powder coated

RAL 9006

RAL 9016

RAL 9005



1 Länge | Length | Longueur | Lunghezza

1186 mm	118
1471 mm	147

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request	

3 direct | direct / indirect

direct	1
indirect	2

4 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white	HCL

5 Output

non-dim	1
DALI	3
Sensor Sensor Capteur Sensore (direct / indirect only)	7

Beispiel | Example | Esempio

1186 mm, white, direct / indirect, 4000 K, DALI

T11A118-9016C2840X3L

Luminous Flux (lm)

	direct			direct / indirect			Weight (kg)
	3000 K	4000 K	dynamic white	3000 K	4000 K	dynamic white	
1186 mm	4068 lm	4422 lm	3494 lm	5560 lm	6033 lm	4770 lm	1186 mm 8,4 kg
1471 mm	4937 lm	5367 lm	4367 lm	6470 lm	6993 lm	5650 lm	1471 mm 9,7 kg

System Power (W)

	direct		direct / indirect	
	3000 K / 4000 K	dynamic white	3000 K / 4000 K	dynamic white
1186 mm	30 W	30 W	51 W	51 W
1471 mm	37 W	38 W	56 W	58 W

Zubehör | Accessories | Accessoires | Accessori **DECORATIVE FRAME T11-1-2-SW**

1 Output

non-dim / DALI	ZRA
Sensor DALI	ZRASD
Sensor dynamic white	ZRASH

2 Dimension

1186 mm	118
1471 mm	147

Zubehör | Accessories | Accessoires | Accessori **SENSOR DALI**

54P913700359103	Extended IR Programming Tool
54P913700392403	IR Remote Control










skai

Hängeleuchte | Pendant luminaire | Suspensions | Sospensione

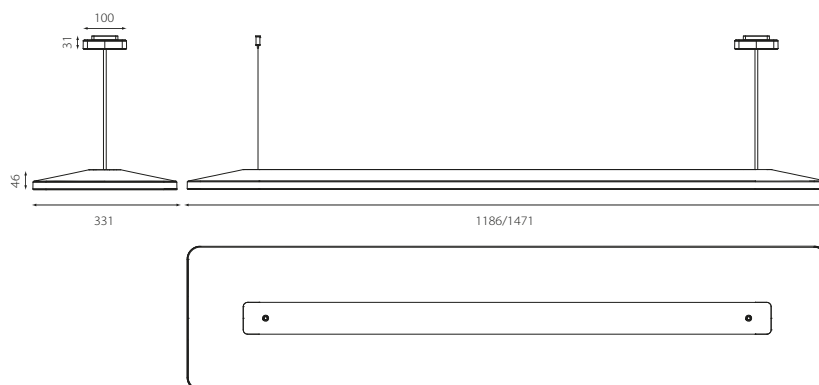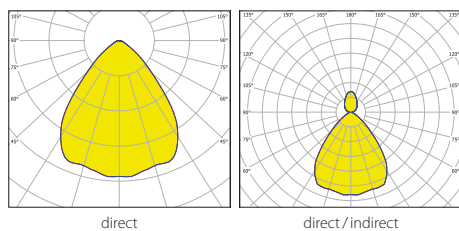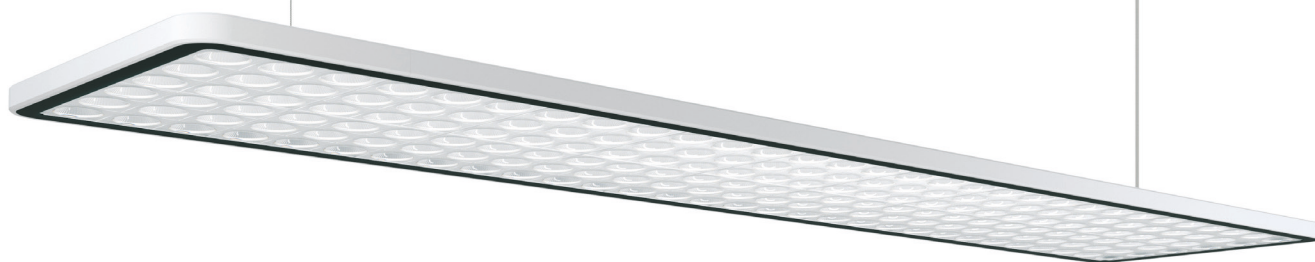

Design: Kai Stania



230V IP20 $R_a > 80$ UGR < 16 up to L90/50.000h MacAdam 3 DALI switchDIM



LED

3000K, 4000K, dynamic white

up to 145 lm/W, up to 5548 lm/m

$R_a > 80$, UGR < 16, MacAdam 3

non-dim/DALI

IEC 62471: Blue light hazard: RG 0

Lifetime up to L90/50.000h

Optic

direct

direct/indirect

unique lens-technology

Options

Motion and day-light sensor

RAL of your choice

7 cable colours

Housing

powder coated

RAL 9006

RAL 9016

RAL 9005



1 Länge | Length | Longueur | Lunghezza

1186 mm	118
1471 mm	147

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request	

3 direct | direct / indirect

direct	1
direct / indirect	2

4 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white	HCL

5 Output

non - dim	1
DALI	3
Sensor Sensor Capteur Sensore (direct / indirect only)	7

Beispiel | Example | Esempio

1186 mm, white, direct / indirect, 4000 K, DALI

T11H118-9016C2840X3L

Luminous Flux (lm)

	direct			direct / indirect		
	3000 K	4000 K	dynamic white	3000 K	4000 K	dynamic white
1186 mm	4068 lm	4422 lm	3494 lm	6025 lm	6580 lm	5136 lm
1471 mm	4937 lm	5367 lm	4367 lm	6869 lm	7446 lm	6123 lm

Weight (kg)

1186 mm	7,5 kg
1471 mm	9,0 kg

System Power (W)

	direct		direct / indirect	
	3000 K / 4000 K	dynamic white	3000 K / 4000 K	dynamic white
1186 mm	30 W	30 W	51 W	51 W
1471 mm	37 W	38 W	56 W	58 W

Zubehör | Accessories | Accessoires | Accessori **DECORATIVE FRAME T11-1-2-SW**

1 Output

non-dim / DALI	ZRA
Sensor DALI	ZRASD
Sensor dynamic white	ZRASH

2 Dimension

1186 mm	118
1471 mm	147

Zubehör | Accessories | Accessoires | Accessori **SENSOR DALI**



54P913700359103	Extended IR Programming Tool
54P913700392403	IR Remote Control







Aura Light Headquarter, Italia (Luca Cioci)

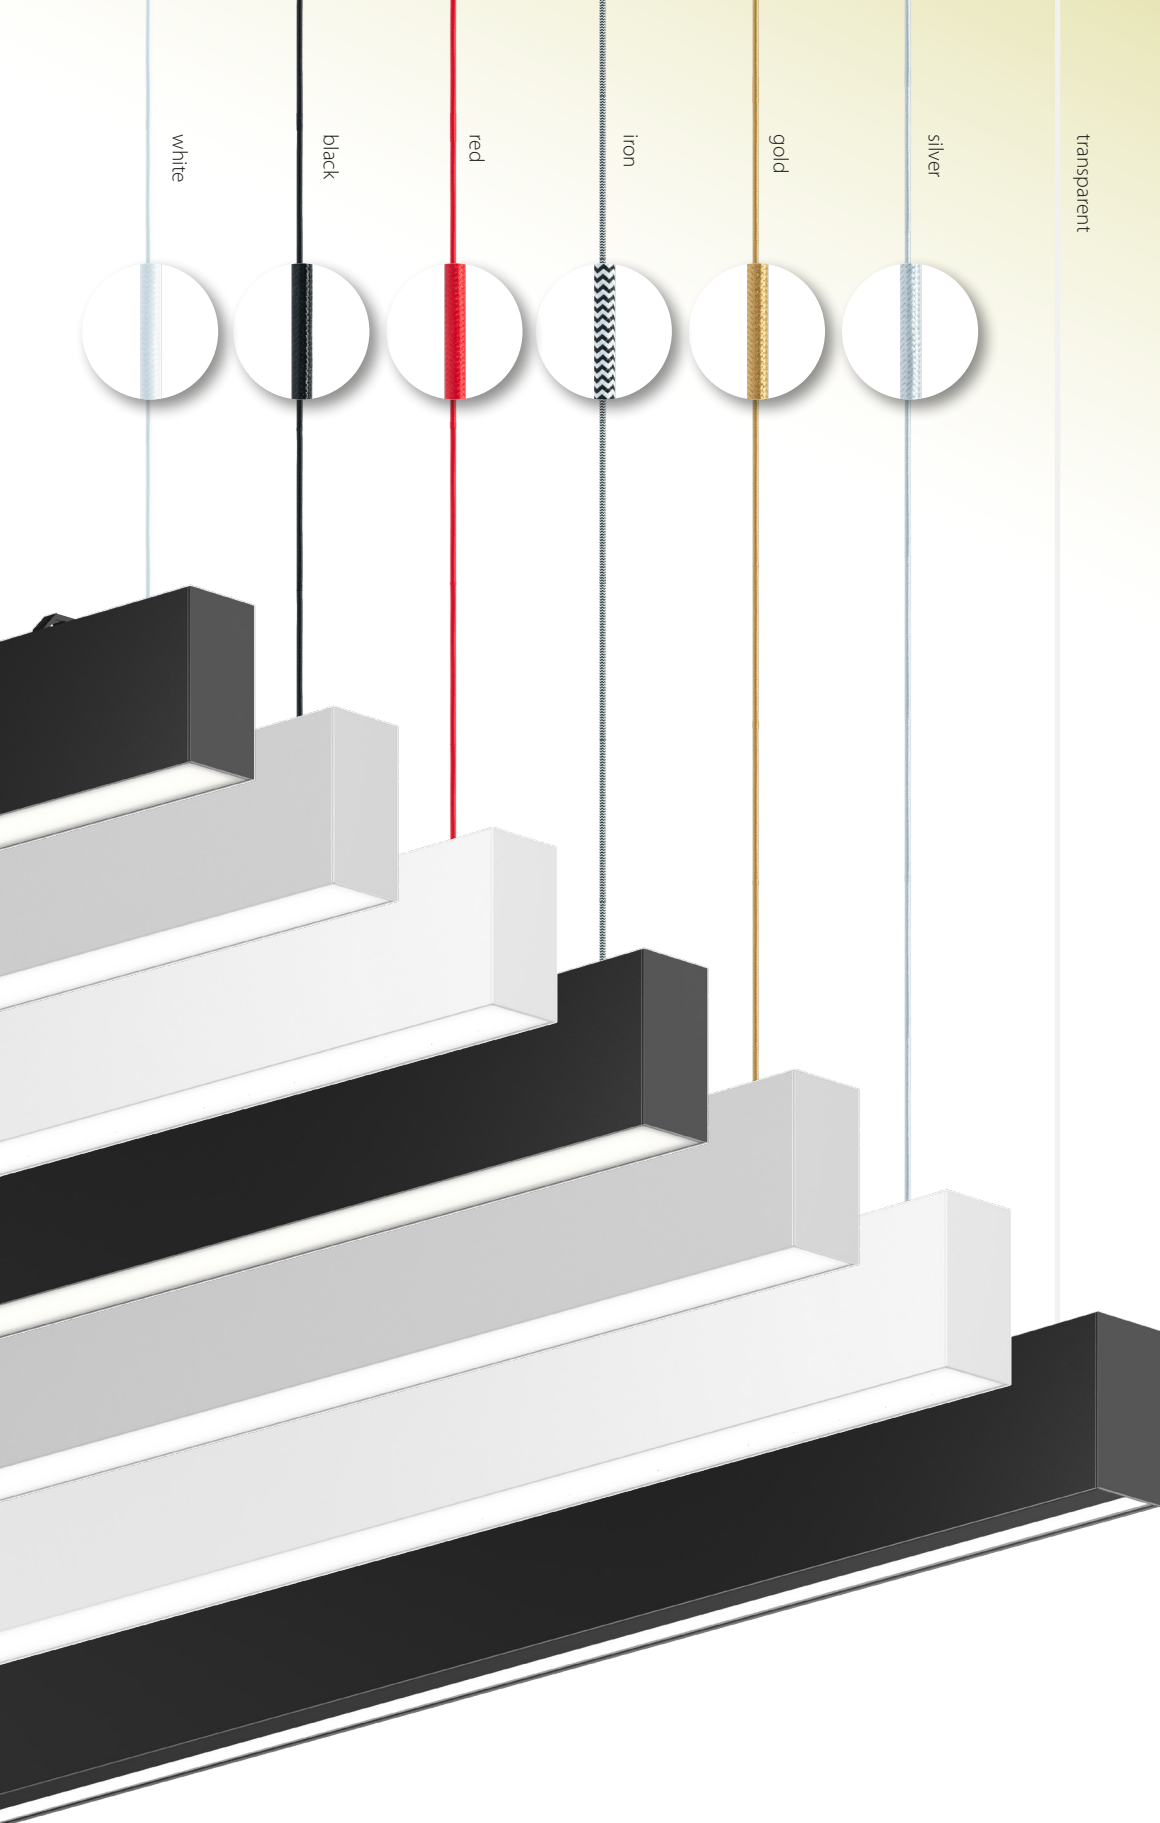

Optionale Ausführung | Optional version | Version optionnelle | Versione opzionale

Einspeiskabel
Suspension cable
Câble d'alimentation
Cavo di alimentazione

2500 mm
5 x 0,75 mm²

▷ white	T65-EIN-WHITE
▷ black	T65-EIN-BLACK
▷ red	T65-EIN-RED
▷ iron	T65-EIN-IRON
▷ gold	T65-EIN-GOLD
▷ silver	T65-EIN-SILVER



Transparent cable incl. (standard version)

90

HOUSING COLOURS
SELECTION





Headquarters & Production

6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com, www.planlicht.com

