



zenit N

New 2021

COMPACT, YET POWERFUL

A brand new member of the ZENIT spotlight family: Thanks to its track integrated driver ZENIT N combines compact design with high performance. With up to 105 lumen/watt ZENIT N sets the benchmark for highly efficient LED spotlights.

Track integrated driver

Color rendering index > 90

- zenit N


Swivel arm


Compact design

40° beam angle


FLEXIBILITY

The swivel arm of ZENIT N allows you to 90° tilt and 355° rotate the spotlight.





40°

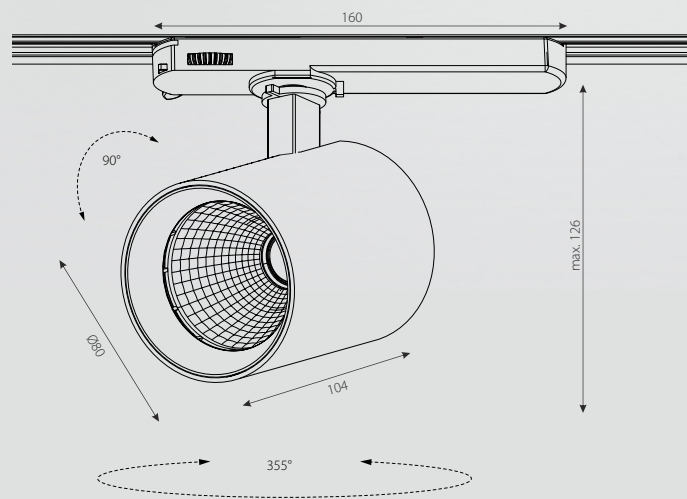

LED

3000 K, 4000 K
up to 105 lm/W
 $R_a > 90$, MacAdam 3
non-dim
Blue light hazard: $RG \leq 1$ IEC 62471

Optic

Reflector: 40°

Flexibility

rotatable up to 355°, adjustable up to 90°

Lifetime

up to L90/50.000h

Options

Honeycomb glare protection
Oval spot lens
Clear protective glass
Blur glass

Housing

powder coated
RAL 9016 
RAL 9005 



 $R_a > 90$ | 230V | IP20 | up to L90/50.000h | MacAdam 3



1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß | white | blanc | bianco

SWWS

schwarz | black | noir | nero

SWSW**3 Output**

high output

H**4 non-dim**

non-dim

1**5 Reflektor | Reflector | Réflecteur | Riflettore**

40°

4**2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore**

LF930 3000 K

930

LF940 4000 K

940**Beispiel | Example | Exemple | Esempio**

white, LF940, high output, non-dim, 40°

S10S104-SWWS-C1940H14

Luminous Flux (lm)		System Power	Reflector	Weight
LF930 3000 K	2680 lm	27 W	40°	0.54 kg
LF940 4000 K	2821 lm	27 W	40°	0.54 kg

Optionales Zubehör | Optional accessory | Accessoires optionnels | Accessori opzionali

Blendschutz-Wabenraster | Honeycomb glare protection | Filtre anti-éblouissement nid d'abeilles | Filtro anti-abbagliamento a nido d'ape

S10-BLE-80

Ovalzeichnerlinse | Oval spot lens | Lentille ovalisante | Lenti ovalizzanti

S10-OZL-80

Klares Schutzglas | Clear protective glass | Verre de protection transparent | Vetro di protezione trasparente

S10-SGL-80

Weichzeichnerglas | Blur glass | Verre effet flou | Vetro con effetto sfocatura

S10-WGL-80

Reflektortausch werkzeuglos möglich.

Passive Kühlung. Treiber in Schienen-Adapter integriert.

Replacement of the reflector without the use of any tools.


Passive cooling. Track-integrated driver.

Remplacement du réflecteur sans outil.


Refroidissement passif. Driver intégré dans l'adaptateur de rail.

Sostituzione del riflettore senza utensili.

Raffreddamento passivo. Driver integrato nell'adattatore del binario.

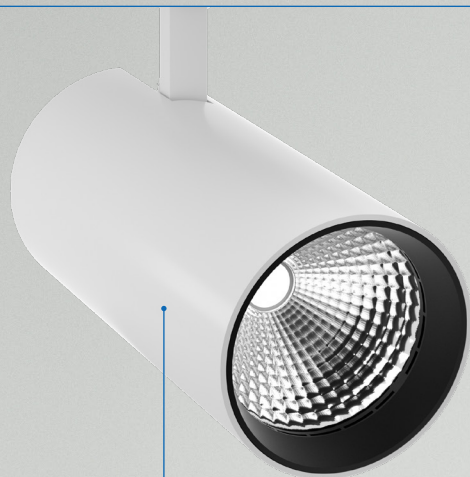


zenit L
Ø 120 mm
L = 250 mm




zenit M
Ø 80 mm
L = 200 mm



zenit S
Ø 58 mm
L = 100 mm



zenit XS
Ø 40 mm
L = 70 mm

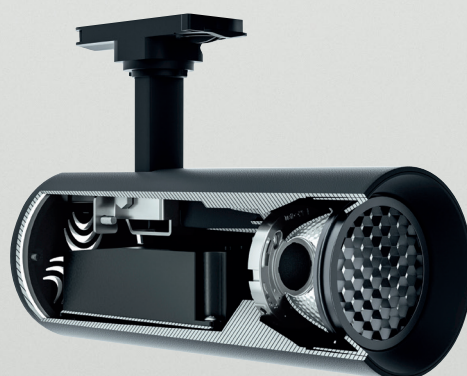




zenit L


Strahler | Spotlight | Projecteur | Proiettore



Flexibility: rotatable up to 355°, adjustable up to 90°

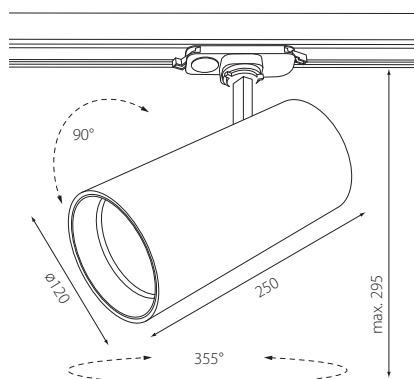

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

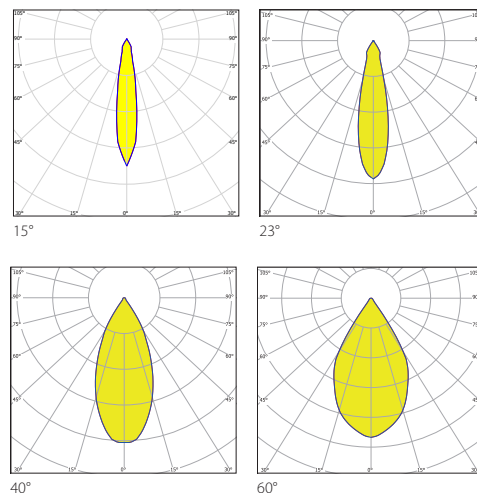

230V IP20 $R_a > 80/90$ up to L90/50.000h

MacAdam 3 DALI



LED

2700K, 3000K, 3500K, 4000K
Food & Fashion

up to 139lm/W

$R_a > 80/90$, MacAdam 3

non-dim/DALI

Blue light hazard: RG≤1 IEC 62471

Optic

Reflector: 15°, 23°, 40°, 60°

Flexibility

rotatable up to 355°, adjustable up to 90°

Lifetime

up to L90/50.000h

Options

Honeycomb glare protection

Oval spot lens

Clear protective glass

Blur glass

Housing

powder coated

white

black

1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	WSWS
schwarz black noir nero	SWSW

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000 K	830
LF840 4000 K	840
LF927 2700 K	927
LF930 3000 K	930
LF935 3500 K	935
LF940 4000 K	940
LF932 3250 K Fashion	FAS
Backwaren Bakery goods Boulangerie Prodotti da forno	BAC
Fleisch Meat Boucherie Carne	FLE
Wurstwaren Sausage products Charcuterie Salumi	WUR
Fisch Fish Poissonnerie Pesche	FIS
Gemüse Vegetables Légumes Verdura	FRU

3 Output

low output	L
medium output	M
high output	H

4 non-dim, DALI

non-dim	1
DALI Eutrac 3	3
DALI Global pulse	G

5 Reflektor | Reflector | Réflecteur | Riflettore

15°	1
23°	2
40°	4
60°	6

Beispiel | Example | Exemple | Esempio

white, LF940, high output, DALI Eutrac, 60°

S10S250-WSWSC1940H36

Luminous Flux (lm)	low output 15°	medium output 15°	high output 15°	low output 23°	medium output 23°	high output 23°	low output 40°	medium output 40°	high output 40°	low output 60°	medium output 60°	high output 60°
LF830 3000 K	2436 lm	3121 lm	3784 lm	2358 lm	3022 lm	3667 lm	2300 lm	2941 lm	3558 lm	2308 lm	2954 lm	3579 lm
LF840 4000 K	2619 lm	3336 lm	4023 lm	2527 lm	3236 lm	3923 lm	2455 lm	3137 lm	3794 lm	2470 lm	3161 lm	3828 lm
LF927 2700 K	1967 lm	2523 lm	3063 lm	1911 lm	2451 lm	2975 lm	1855 lm	2377 lm	2884 lm	1851 lm	2384 lm	2907 lm
LF930 3000 K	2087 lm	2684 lm	3266 lm	2038 lm	2608 lm	3289 lm	1999 lm	2557 lm	3096 lm	2010 lm	2574 lm	3120 lm
LF935 3500 K	2170 lm	2788 lm	3391 lm	2123 lm	2716 lm	3289 lm	2073 lm	2656 lm	3222 lm	2093 lm	2677 lm	3242 lm
LF940 4000 K	2185 lm	2794 lm	3382 lm	2128 lm	2724 lm	3300 lm	2083 lm	2665 lm	3226 lm	2096 lm	2684 lm	3253 lm
FAS (LF932 3250 K)	1891 lm	2424 lm	2941 lm	1841 lm	2353 lm	2847 lm	1790 lm	2291 lm	2776 lm	1800 lm	2306 lm	2797 lm
BAC	1284 lm	1641 lm	1984 lm	1247 lm	1591 lm	1920 lm	1214 lm	1594 lm	1872 lm	1221 lm	1560 lm	1887 lm
FLE	1271 lm	1623 lm	1961 lm	1238 lm	1581 lm	1911 lm	1206 lm	1542 lm	1867 lm	1211 lm	1548 lm	1873 lm
WUR	1237 lm	1581 lm	1919 lm	1203 lm	1540 lm	1865 lm	1171 lm	1499 lm	1816 lm	1176 lm	1507 lm	1828 lm
FIS	1995 lm	2557 lm	3103 lm	1942 lm	2482 lm	3003 lm	1888 lm	2417 lm	2929 lm	1899 lm	2433 lm	2951 lm
FRU	1774 lm	2282 lm	2778 lm	1744 lm	2234 lm	2708 lm	1697 lm	2177 lm	2643 lm	1706 lm	2190 lm	2661 lm

System Power (W)

	low output	medium output	high output
zenit L	19 W	25 W	30 W

Weight (kg)

zenit L	1,78 kg
---------	---------

QUICK VIEW

LF930 3000 K	19 W	25 W	30 W
15°	2087 lm	2684 lm	3266 lm
23°	2038 lm	2608 lm	3289 lm
40°	1999 lm	2557 lm	3096 lm
60°	2010 lm	2574 lm	3120 lm




Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali



Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-120
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-120
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-120
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-120

zenit M


Strahler | Spotlight | Projecteur | Proiettore

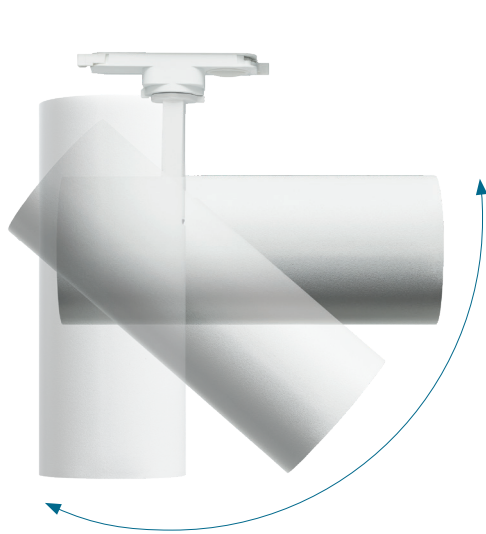

Flexibility: rotatable up to 355°, adjustable up to 90°

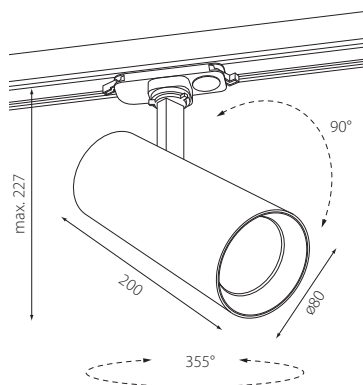

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

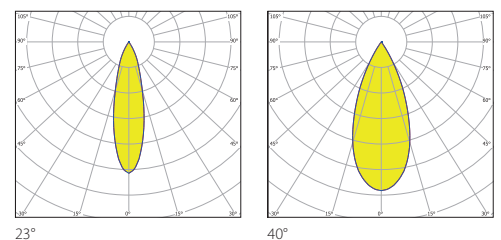

A++ **A**

230V IP20 $R_a > 80/90$ up to L90/50.000h MacAdam 3 DALI



LED

2700 K, 3000 K, 3500 K, 4000 K
Food & Fashion

up to 127 lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI

Blue light hazard: $RG \leq 1$ IEC 62471

Optic

Reflector: 23°, 40°

Flexibility

rotatable up to 355°, adjustable up to 90°

Lifetime

up to L90 / 50.000 h

Options

Honeycomb glare protection

Oval spot lens

Clear protective glass

Blur glass

Housing

powder coated

white

black

1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	WSWS
schwarz black noir nero	SWSW

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000 K	830
LF840 4000 K	840
LF927 2700 K	927
LF930 3000 K	930
LF935 3500 K	935
LF940 4000 K	940
LF932 3250 K Fashion	FAS
Backwaren Bakery goods Boulangerie Prodotti da forno	BAC
Fleisch Meat Boucherie Carne	FLE
Wurstwaren Sausage products Charcuterie Salumi	WUR
Fisch Fish Poissonnerie Pesce	FIS
Gemüse Vegetables Légumes Verdura	FRU

3 Output

low output	L
medium output	M
high output	H
very high output	V

4 non-dim, DALI

non-dim	1
DALI Eutrac 3	3
DALI Global pulse	G

5 Reflektor | Reflector | Réflecteur | Riflettore

23°	2
40°	4

Beispiel | Example | Exemple | Esempio

white, LF940, high output, DALI Global, 40°

S10S200-WSWSC1940HG4

Luminous Flux (lm)	low output				medium output				high output				very high output			
	23°				40°				40°				40°			
LF830 3000 K	1111 lm				1322 lm				1931 lm				2505 lm			
LF840 4000 K	1180 lm				1404 lm				2049 lm				2658 lm			
LF927 2700 K	900 lm				1071 lm				1564 lm				2029 lm			
LF930 3000 K	944 lm				1121 lm				1629 lm				2102 lm			
LF935 3500 K	967 lm				1151 lm				1687 lm				2196 lm			
LF940 4000 K	976 lm				1161 lm				1696 lm				2199 lm			
FAS (LF932 3250 K)	880 lm				1047 lm				1531 lm				1988 lm			
BAC	604 lm				716 lm				1037 lm				1333 lm			
FLE	604 lm				717 lm				1038 lm				1334 lm			
WUR	570 lm				679 lm				994 lm				1293 lm			
FIS	924 lm				1100 lm				1607 lm				2087 lm			
FRU	774 lm				930 lm				1403 lm				1879 lm			

System Power (W)	low output	medium output	high output	very high output
zenit M	9W	11W	17W	22W

Weight (kg)	
zenit M	1,0 kg

QUICK VIEW

LF930 3000 K	9W	12W	17W	22W
23°	944 lm	1121 lm	1629 lm	2102 lm
40°	952 lm	1130 lm	1643 lm	2120 lm



Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali


Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-80
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-80
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-80

zenit S

Strahler | Spotlight | Projecteur | Proiettore



Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

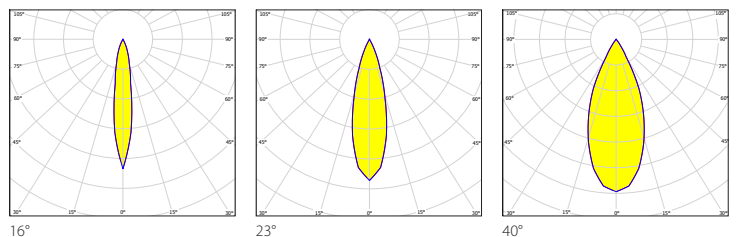

A++ **A**

230V IP20 $R_a > 80/90$ up to L90/50.000h MacAdam 3 DALI



LED

2700 K, 3000 K, 3500 K, 4000 K

up to 117 lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI

Blue light hazard: RGs1 IEC 62471

Optic

Reflector: 16°, 23°, 40°

Flexibility

rotatable up to 355°, adjustable up to 90°

Lifetime

up to L90 / 50.000 h

Options

Honeycomb glare protection

Oval spot lens

Clear protective glass

Blur glass

Housing

powder coated

white 

black 

1 Entblendvorsatz | Anti-glare attachment Module anti-éblouissement | Modulo anti-abbagliamento

gold gold or oro	GD
schwarz black noir nero	SW

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	WS
schwarz black noir nero	SW

3 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000 K	830
LF840 4000 K	840
LF927 2700 K	927
LF930 3000 K	930
LF935 3500 K	935
LF940 4000 K	940

4 Output

low output	L
high output	H

5 non-dim, DALI

non-dim	1
DALI Global pulse	G

6 Reflektor | Reflector | Réflecteur | Riflettore

16°	1
23°	2
40°	4

Beispiel | Example | Exemple | Esempio

white, anti-glare attachment gold, LF940, high output, non-dim, 23°

S10S100-GDWSC1940H12

Luminous Flux (lm)	low output		high output		low output		high output		low output		high output	
	16°		16°		23°		23°		40°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000 K	820 lm	796 lm	1161 lm	1127 lm	784 lm	761 lm	1112 lm	1079 lm	768 lm	746 lm	1088 lm	1056 lm
LF840 4000 K	859 lm	834 lm	1217 lm	1181 lm	825 lm	801 lm	1172 lm	1138 lm	803 lm	779 lm	1139 lm	1106 lm
LF927 2700 K	644 lm	625 lm	913 lm	887 lm	623 lm	605 lm	881 lm	855 lm	609 lm	591 lm	862 lm	837 lm
LF930 3000 K	672 lm	653 lm	933 lm	906 lm	646 lm	627 lm	903 lm	877 lm	631 lm	613 lm	878 lm	852 lm
LF935 3500 K	704 lm	683 lm	987 lm	958 lm	679 lm	659 lm	952 lm	924 lm	660 lm	641 lm	925 lm	898 lm
LF940 4000 K	713 lm	692 lm	988 lm	960 lm	686 lm	666 lm	943 lm	916 lm	667 lm	647 lm	921 lm	895 lm

System Power (W)

	low output	high output
zenit S	7 W	11 W

Weight (kg)

zenit S	0,3 kg
---------	--------

QUICK VIEW

LF930 3000 K	7 W	11 W
16° (gold)	672 lm	933 lm
23° (gold)	646 lm	903 lm
40° (gold)	631 lm	878 lm



Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-58
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-58
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-58
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-58







zenit M | Würth Modyf, Künzelsau / Germany

zenit S inset p.forty & pure 3


VARIATIONS

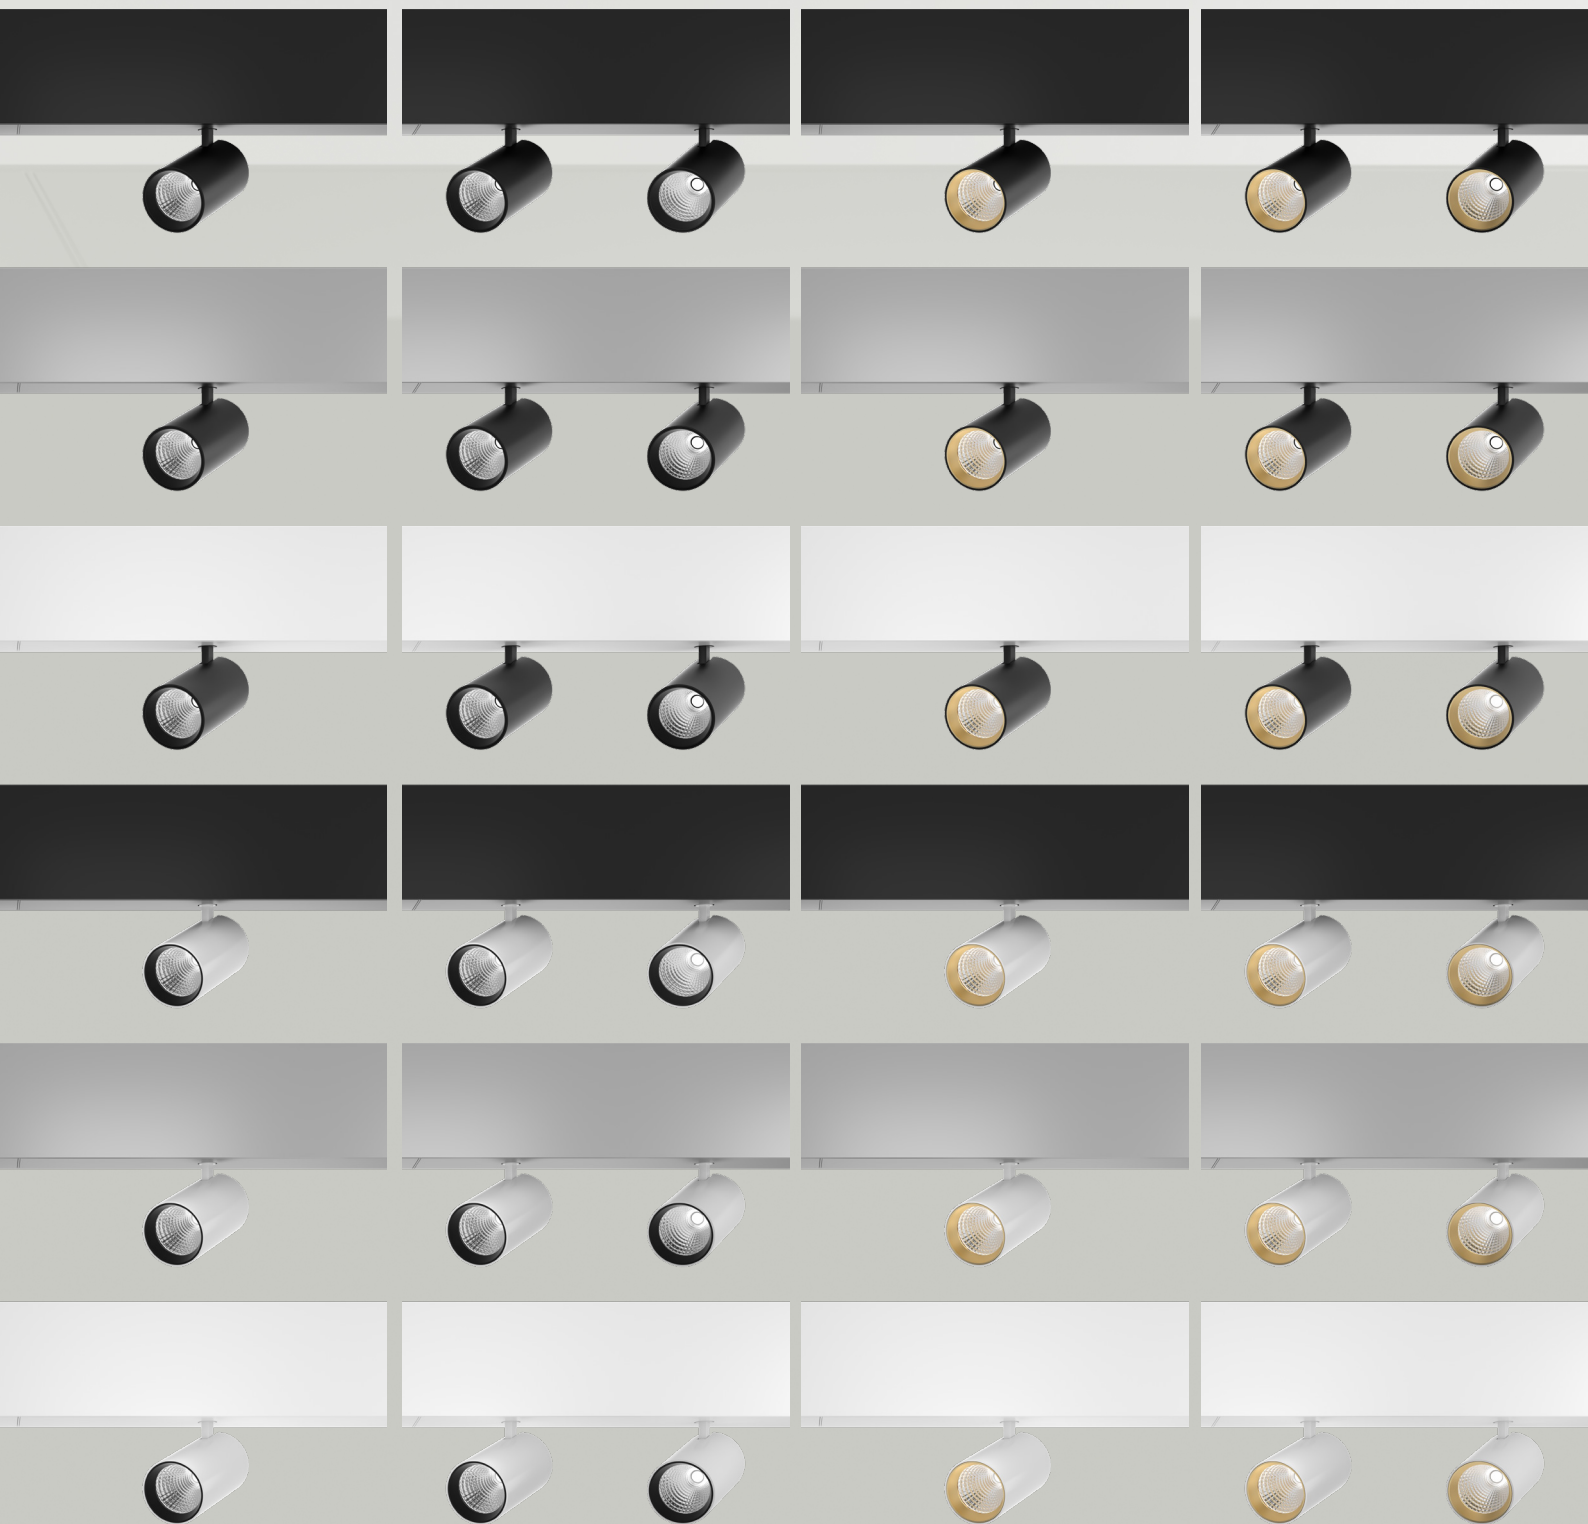

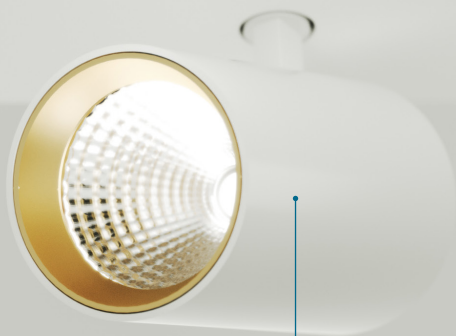

1 Spots

1 Spot	1
2 Spots	2

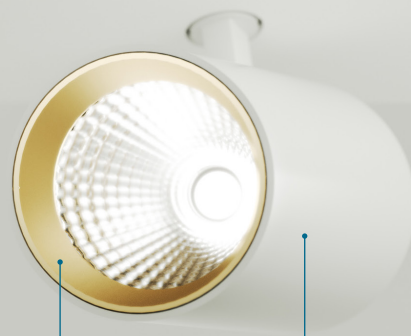

3 Gehäusefarbe
Housing colour
Couleur du luminaire
Colore profilo

weiß white blanc bianco	W
schwarz black noir nero	S

2 Entblendvorsatz | Anti-glare attachment
Module anti-éblouissement | Modulo anti-abbagliamento


gold gold or oro	G
schwarz black noir nero	S

4 Farbe Blindabdeckung | Blank cover colour | Couleur du cache opaque | Colore elemento chieco



weiß white blanc bianco	WS
schwarz black noir nero	SW
silber silver argent argento	SI

zenit S inset p.forty & pure 3

Strahler | Spotlight | Projecteur | Proiettore Inset p.forty & pure 3

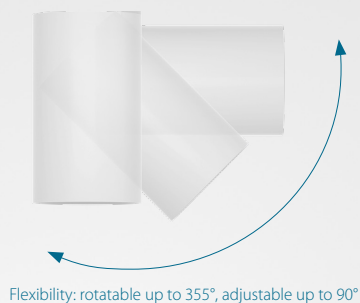

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

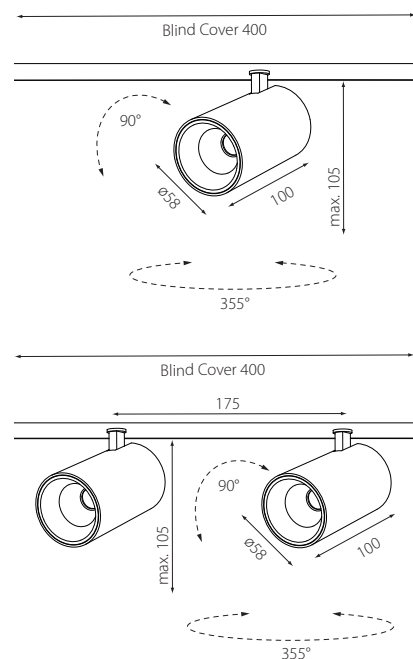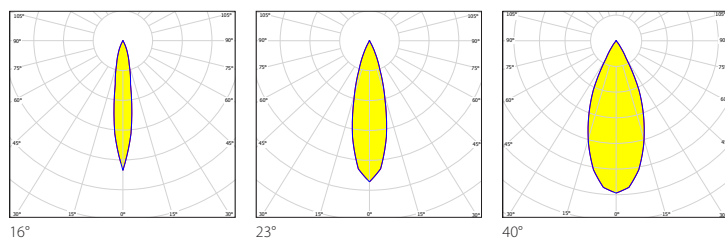

230V IP20 $R_a > 80/90$ UGR < 16 up to L80/50.000h MacAdam 3 DALI switchDIM

LED

2700 K, 3000 K, 3500 K, 4000 K

up to 117 lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG ≤ 1 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

Reflector: 16°, 23°, 40°

Flexibility

rotatable up to 355°, adjustable up to 90°

Options

Honeycomb glare protection

Oval spot lens

Clear protective glass

Blur glass

Housing

powder coated

white

black

1 Spots

1 Spot	1
2 Spots	2

2 Entblendvorsatz | Anti-glare attachment
Module anti-éblouissement | Modulo anti-abbagliamento

gold gold or oro	G
schwarz black noir nero	S

3 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	W
schwarz black noir nero	S

4 Farbe Blindabdeckung | Blank cover colour
Couleur du cache opaque | Colore elemento chieco

weiß white blanc bianco	WS
schwarz black noir nero	SW
silber silver argent argento	SI

5 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000 K	830
LF840 4000 K	840
LF927 2700 K	927
LF930 3000 K	930
LF935 3500 K	935
LF940 4000 K	940

6 Output

low output	L
high output	H

7 non-dim, DALI dim

non-dim	1
DALI	3

8 Reflektor | Reflector | Réflecteur | Riflettore

16°	1
23°	2
40°	4

Beispiel | Example | Esempio

Inset pure 3, 2 Spots black, anti-glare cone gold, LF940, high output, DALI, 23°, blank cover in white

P33-Z2S-GSWS940H32

Luminous Flux (lm) *

	low output		high output		low output		high output		low output		high output	
	16°		16°		23°		23°		40°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000K	820lm	796lm	1161 lm	1127lm	784lm	761 lm	1112lm	1079lm	768lm	746lm	1088lm	1056lm
LF840 4000K	859lm	834lm	1217lm	1181 lm	825lm	801 lm	1172lm	1138lm	803lm	779lm	1139lm	1106lm
LF927 2700K	644lm	625lm	913lm	887lm	623lm	605 lm	881lm	855 lm	609lm	591lm	862lm	837lm
LF930 3000K	672lm	653lm	933lm	906lm	646lm	627 lm	903lm	877lm	631lm	613lm	878lm	852lm
LF935 3500K	704lm	683lm	987lm	958lm	679lm	659 lm	952lm	924lm	660lm	641lm	925lm	898lm
LF940 4000K	713lm	692lm	988lm	960lm	686lm	666 lm	943lm	916lm	667lm	647lm	921lm	895lm

Weight (kg) *

zenit S	0,3 kg
---------	--------

System Power (W) *

	low output	high output
zenit S	7 W	11 W

* figures per single spot




Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-58
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-58
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-58
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-58

zenit XS inset pure 3

VARIATIONS



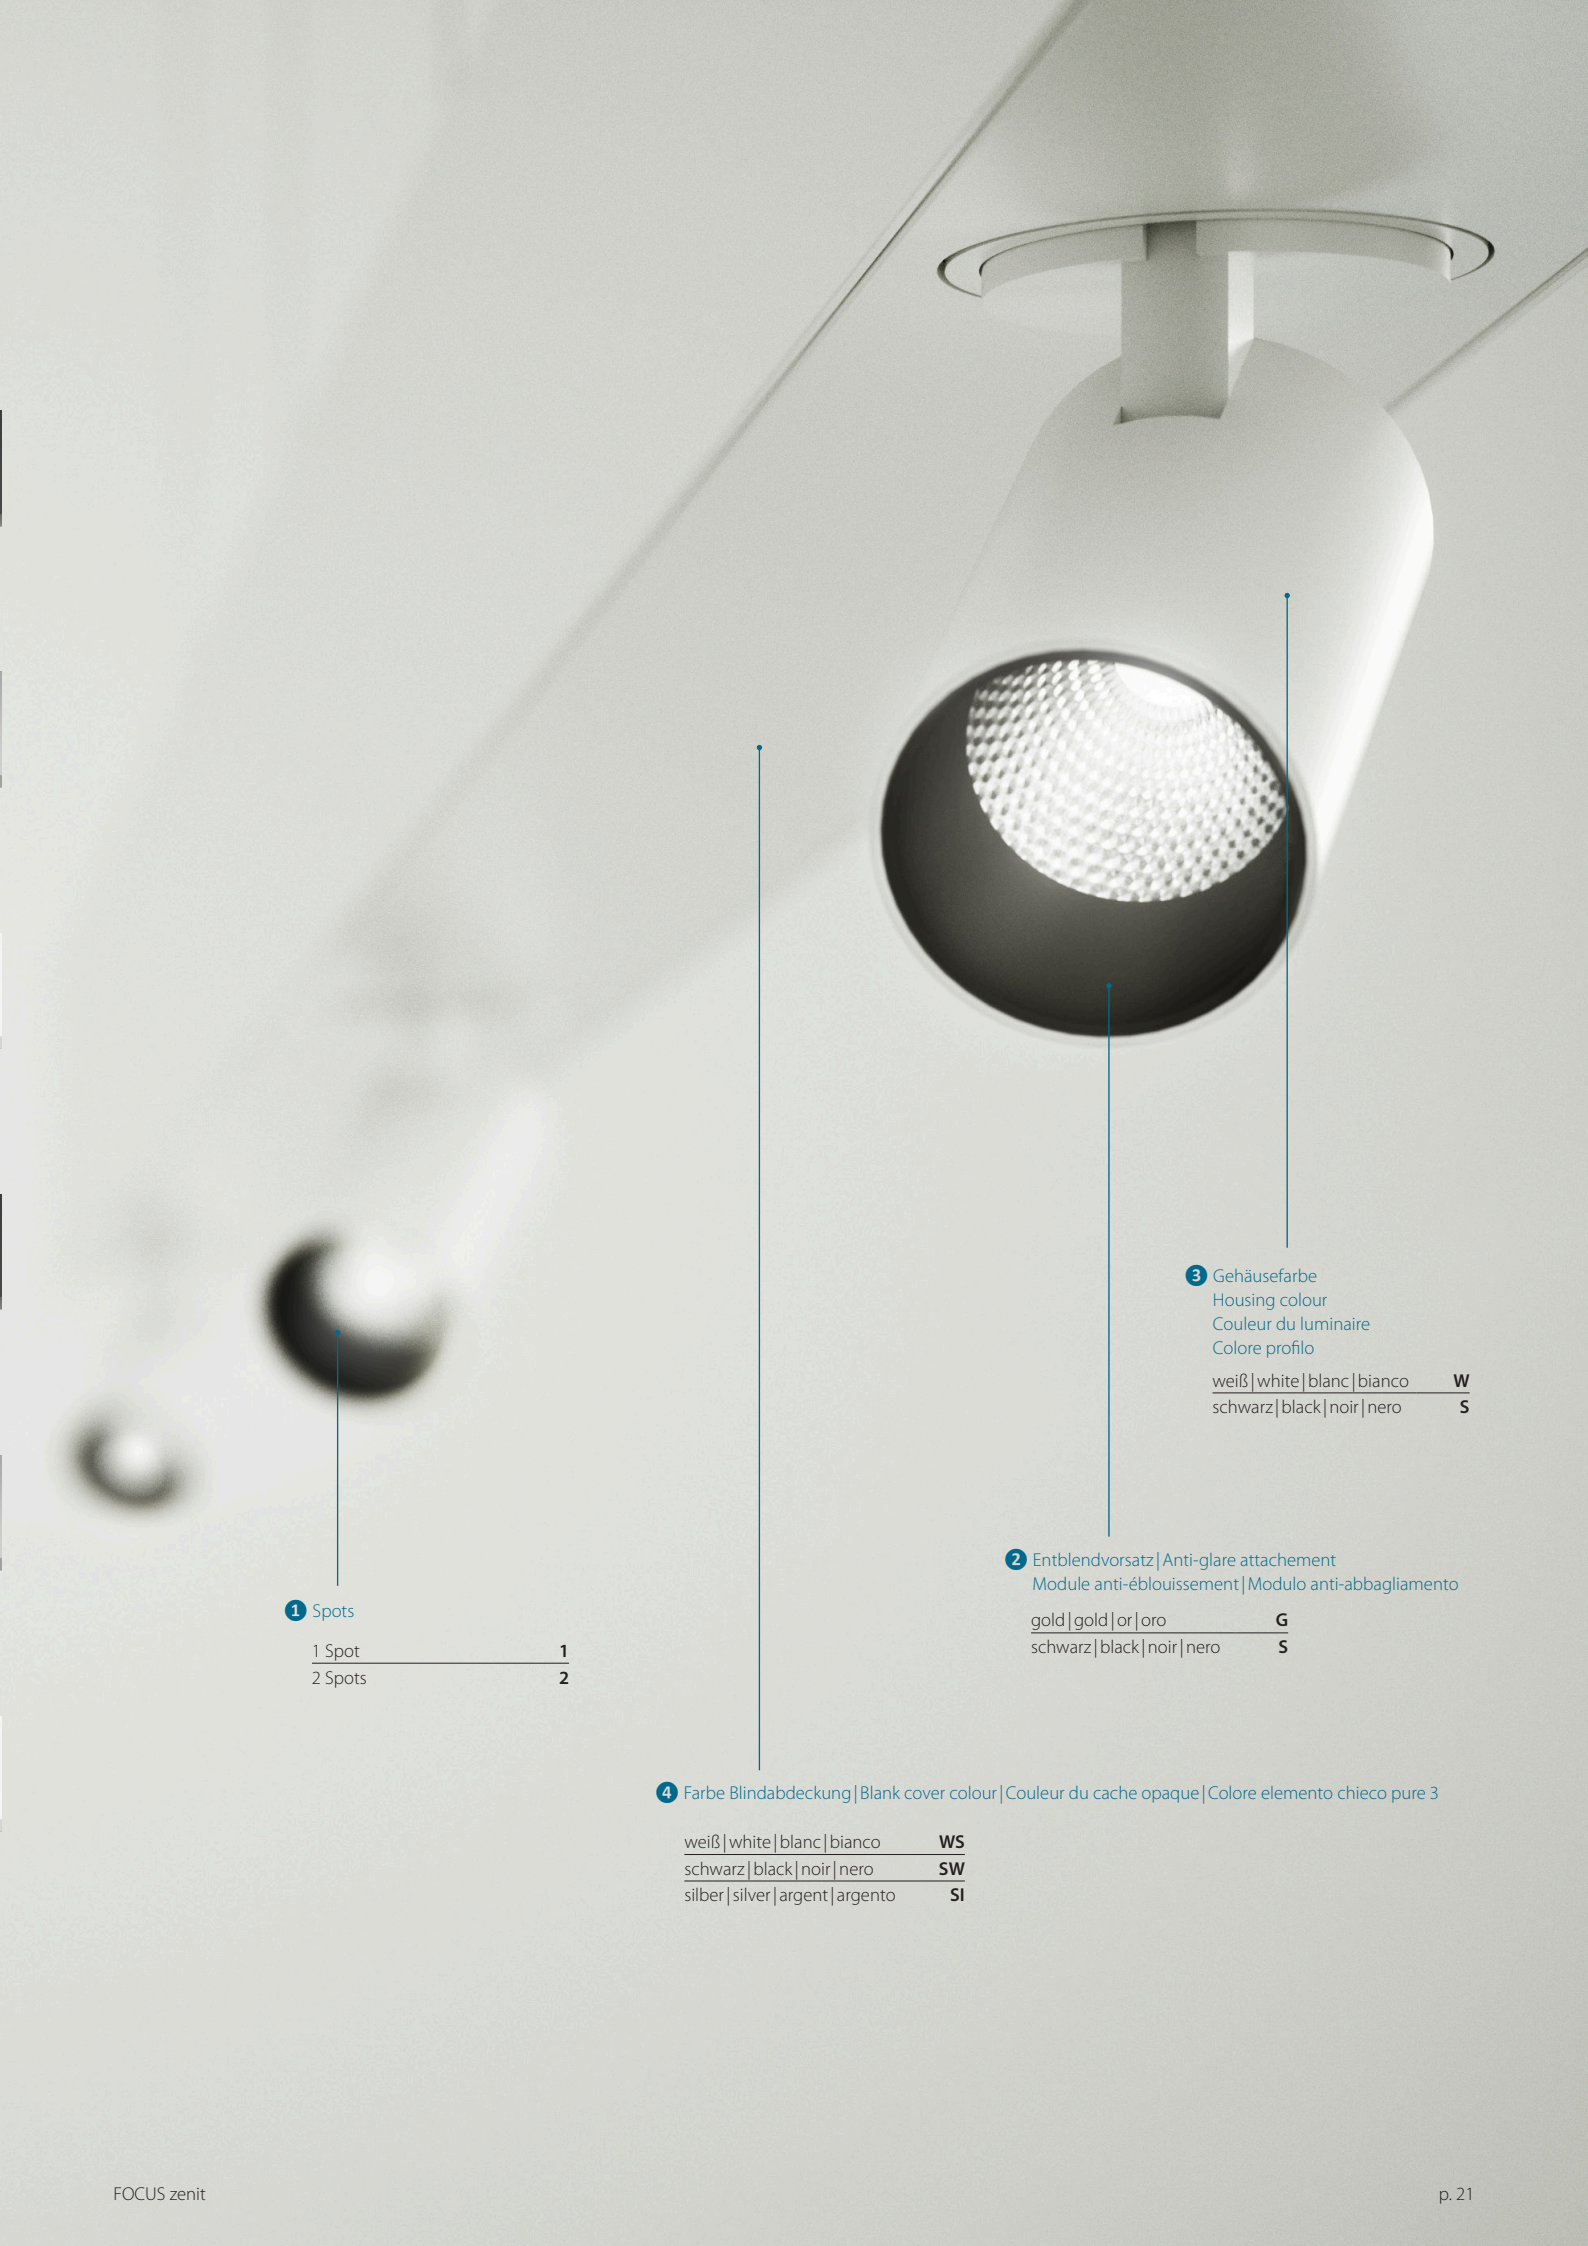

1 Spots

1 Spot	1
2 Spots	2

2 Entblendvorsatz | Anti-glare attachment
Module anti-éblouissement | Modulo anti-abbagliamento

gold gold or oro	G
schwarz black noir nero	S

3 Gehäusefarbe
Housing colour
Couleur du luminaire
Colore profilo



weiß white blanc bianco	W
schwarz black noir nero	S

4 Farbe Blindabdeckung | Blank cover colour | Couleur du cache opaque | Colore elemento chieco pure 3



weiß white blanc bianco	WS
schwarz black noir nero	SW
silber silver argent argento	SI

zenit XS inset pure 3

Strahler | Spotlight | Projecteur | Proiettore Inset pure 3

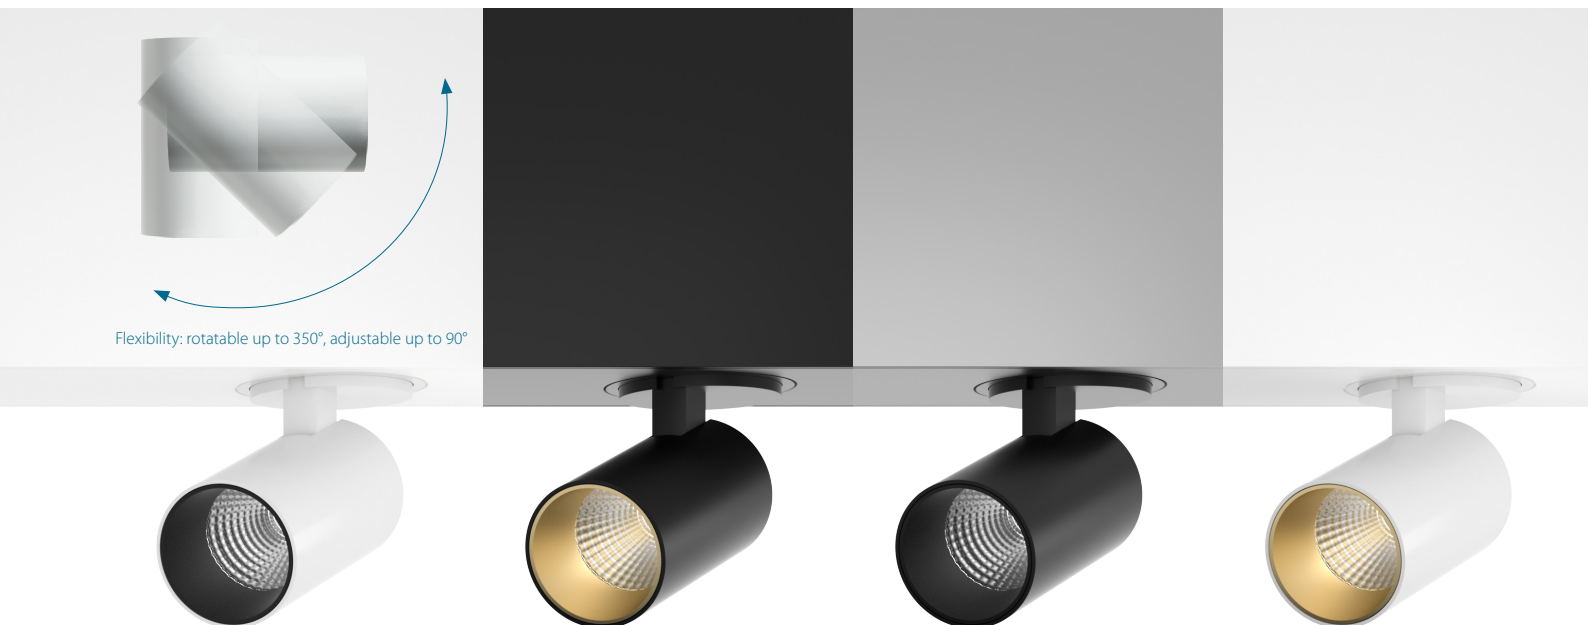

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

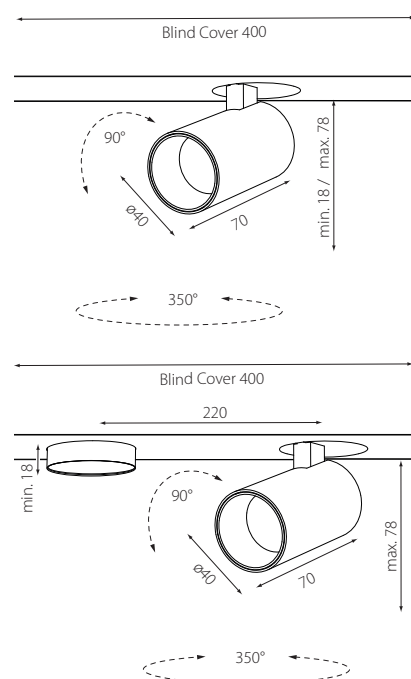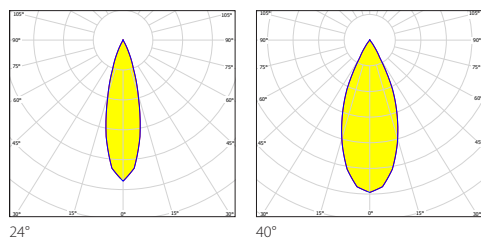

230V IP20 $R_a > 80/90$ UGR < 16 up to L80/50.000h MacAdam 3 DALI switchDIM      

LED

2700 K, 3000 K, 4000 K

up to 69 lm/W

$R_a > 80/90$, MacAdam 3

non-dim / DALI dim

Blue light hazard: $RG \leq 1$ IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

Reflector: 24°, 40°

Flexibility

rotatable up to 350°, adjustable up to 90°

Options

Honeycomb glare protection

Oval spot lens

Blur glass

Housing

powder coated

white 

black 

1 Spots

1 Spot	1
2 Spots	2

2 Entblendvorsatz | Anti-glare attachment

Module anti-éblouissement | Modulo anti-abbagliamento

gold gold or oro	G
schwarz black noir nero	S

3 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	W
schwarz black noir nero	S

4 Farbe Blindabdeckung | Blank cover colour pure 3

Couleur du cache opaque | Colore elemento di chiusura pure 3

weiß white blanc bianco	WS
schwarz black noir nero	SW
silber silver argent argento	SI

5 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000 K	830
LF840 4000 K	840
LF927 2700 K	927
LF930 3000 K	930
LF940 4000 K	940

6 non-dim, DALI

non-dim	1
DALI	3

7 Reflektor | Reflector | Réflecteur | Riflettore

24°	2
40°	4

Beispiel | Example | Esempio

2 spots white, anti-glare cone black, LF930, high output, non-dim, 40°, blank cover pure 3 in white

P33-Z2XS-SWWS930H14

Luminous Flux (lm) *

	24°		40°	
	gold	black	gold	black
LF830 3000 K	507 lm	453 lm	496 lm	443 lm
LF840 4000 K	529 lm	473 lm	518 lm	463 lm
LF927 2700 K	380 lm	340 lm	373 lm	333 lm
LF930 3000 K	404 lm	361 lm	395 lm	353 lm
LF940 4000 K	433 lm	387 lm	423 lm	378 lm


System Power (W) *

zenit XS	7,7 W
----------	-------

Weight (kg) *

zenit XS	0,3 kg
----------	--------

* figures per single spot

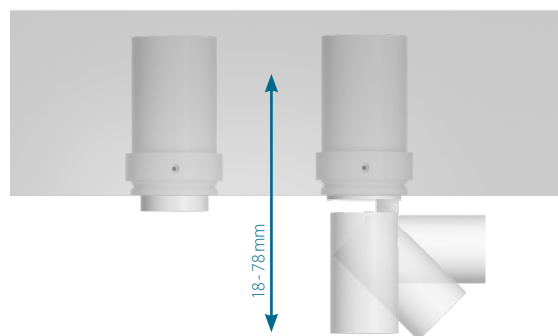

Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-40
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-40
Weichzeichnerglas Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-40



Headquarters & Production

6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com, www.planlicht.com

