
planlicht




lili


lili

Aufbauleuchte | Surface-mount luminaire | Luminaire en saillie

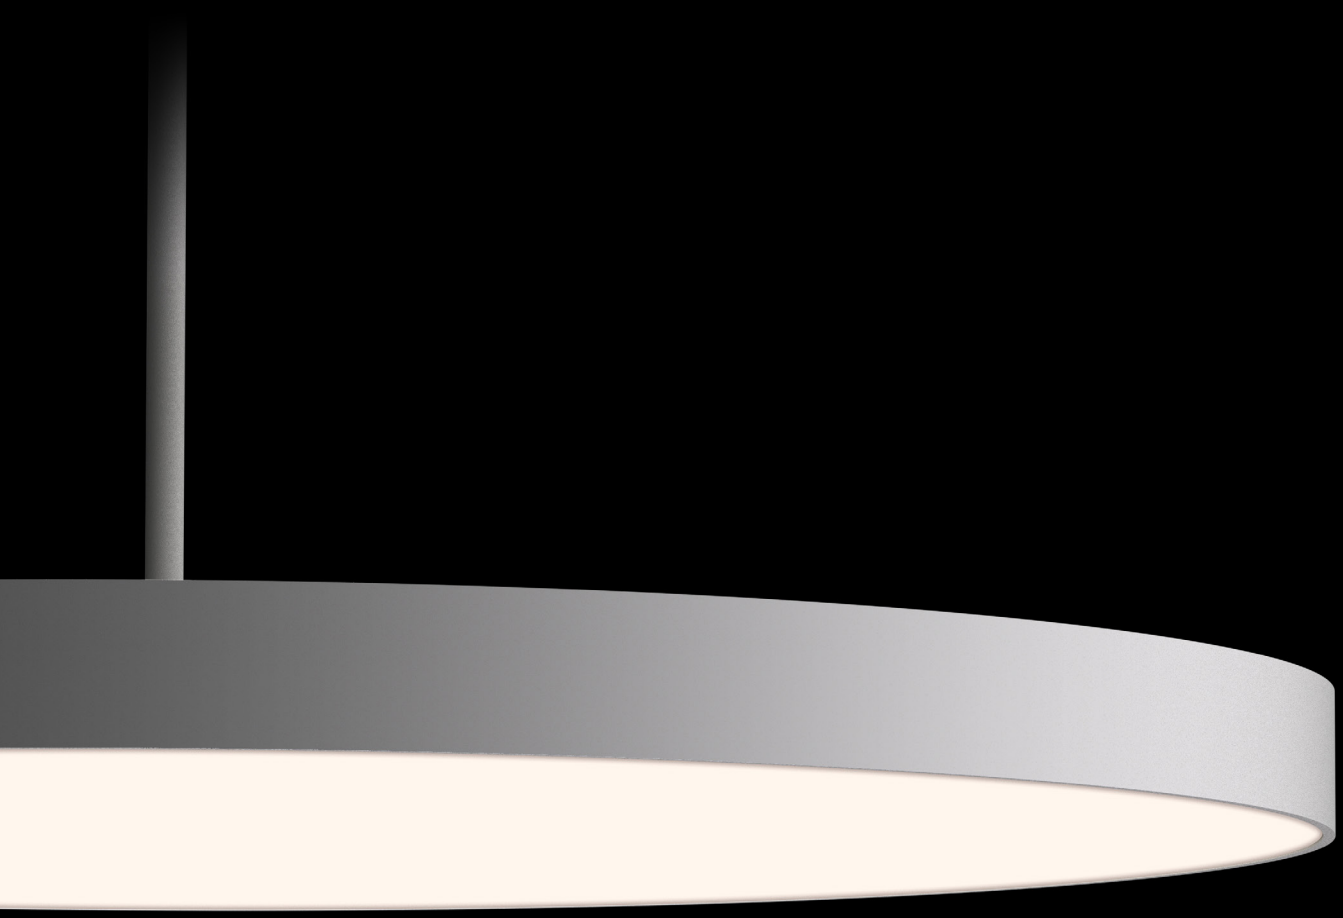



satiné



microprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 IP54 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white

up to 142 lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

microprism for reduced brightness (LRA)

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

RAL 9006 RAL 9016

1 Dimension

ø 330 mm	**033**
ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber | silver | argent (RAL 9006)	**9006**
weiß | white | blanc (RAL 9016)	**9016**

3 Schutzart | Protection rating | Indice de protection

IP20	**C**
IP54 (non Emergency lighting)	**Q**

4 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**
2700 - 6500 K dynamic white	**HCL**

5 Output

low output non-dim	**L1**
high output DALI dim	**H3**
dynamic white	**X3**

6 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple


ø 420 mm, weiß | white | blanc, IP54, 4000 K, high output DALI dim, satiné

F50A042-9016Q1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
	high output		low output		high output		low output		dynamic white	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 330 mm	1864 lm	1583 lm	957 lm	850 lm	1934 lm	1642 lm	991 lm	879 lm	1819 lm	1545 lm
ø 420 mm	2910 lm	2470 lm	1591 lm	1413 lm	3019 lm	2563 lm	1648 lm	1460 lm	2840 lm	2410 lm
ø 620 mm	6132 lm	5344 lm	3010 lm	2734 lm	6353 lm	5523 lm	3104 lm	2825 lm	5914 lm	5154 lm
ø 920 mm	12521 lm	10795 lm	6334 lm	5631 lm	12988 lm	11157 lm	6543 lm	5820 lm	12220 lm	10531 lm
ø 1220 mm	22720 lm	20348 lm	11828 lm	10746 lm	23507 lm	21029 lm	12223 lm	11106 lm	21246 lm	19027 lm


System Power (W)	high output	low output	dynamic white
ø 330 mm	18,5 W	11 W	19,5 W
ø 420 mm	27 W	15 W	27 W
ø 620 mm	51 W	25 W	53 W
ø 920 mm	96 W	47 W	99 W
ø 1220 mm	172 W	86 W	182 W


Weight (kg)	
ø 330 mm	4,3 kg
ø 420 mm	4,9 kg
ø 620 mm	9,7 kg
ø 920 mm	16,0 kg
ø 1220 mm	22,2 kg

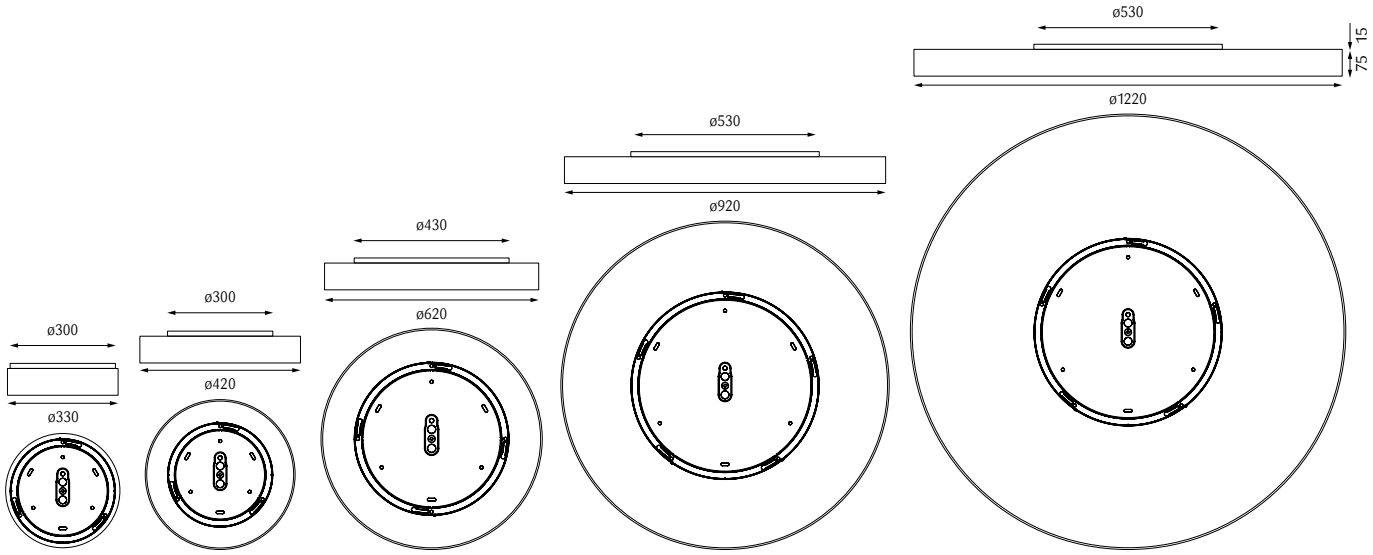


lili direct / indirect

Aufbauleuchte | Surface-mount luminaire | Luminaire en saillie

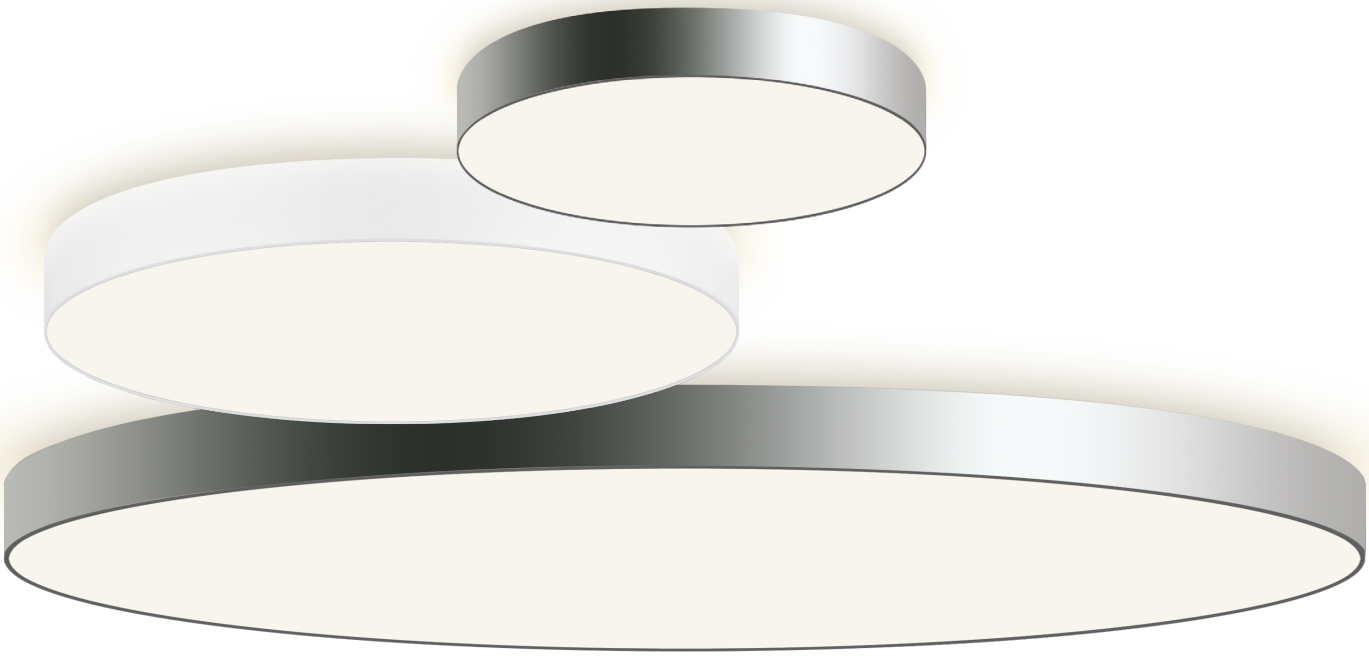





low output satiné



low outputmicroprism



high output satiné



high outputmicroprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white

up to 139 lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct/indirect

satiné

microprism for reduced brightness (LRA)

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

RAL 9006 RAL 9016

1 Dimension

ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber | silver | argent (RAL 9006)	**9006**
weiß | white | blanc (RAL 9016)	**9016**

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**

4 Output

low output non-dim	**L1**
high output DALI dim	**H3**

5 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple


ø 420 mm, weiß | white | blanc, 4000 K, high output DALI dim, satiné

F50A042-9016C2840H3S

Luminous Flux (lm)	3000 K				4000 K			
	high output		low output		high output		low output	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 420 mm	3941 lm	3504 lm	2615 lm	2442 lm	4160 lm	3726 lm	2782 lm	2594 lm
ø 620 mm	7198 lm	6409 lm	4120 lm	3835 lm	7525 lm	6694 lm	4325 lm	4046 lm
ø 920 mm	14479 lm	12753 lm	8385 lm	7681 lm	15141 lm	13310 lm	8799 lm	8075 lm
ø 1220 mm	24679 lm	22305 lm	13878 lm	12796 lm	25661 lm	23181 lm	14479 lm	13360 lm

System Power (W)	high output	low output
ø 420 mm	38 W	25 W
ø 620 mm	62 W	36 W
ø 920 mm	116 W	65 W
ø 1220 mm	191 W	104 W

Weight (kg)	
ø 420 mm	4,9 kg
ø 620 mm	9,7 kg
ø 920 mm	16,0 kg
ø 1220 mm	22,2 kg

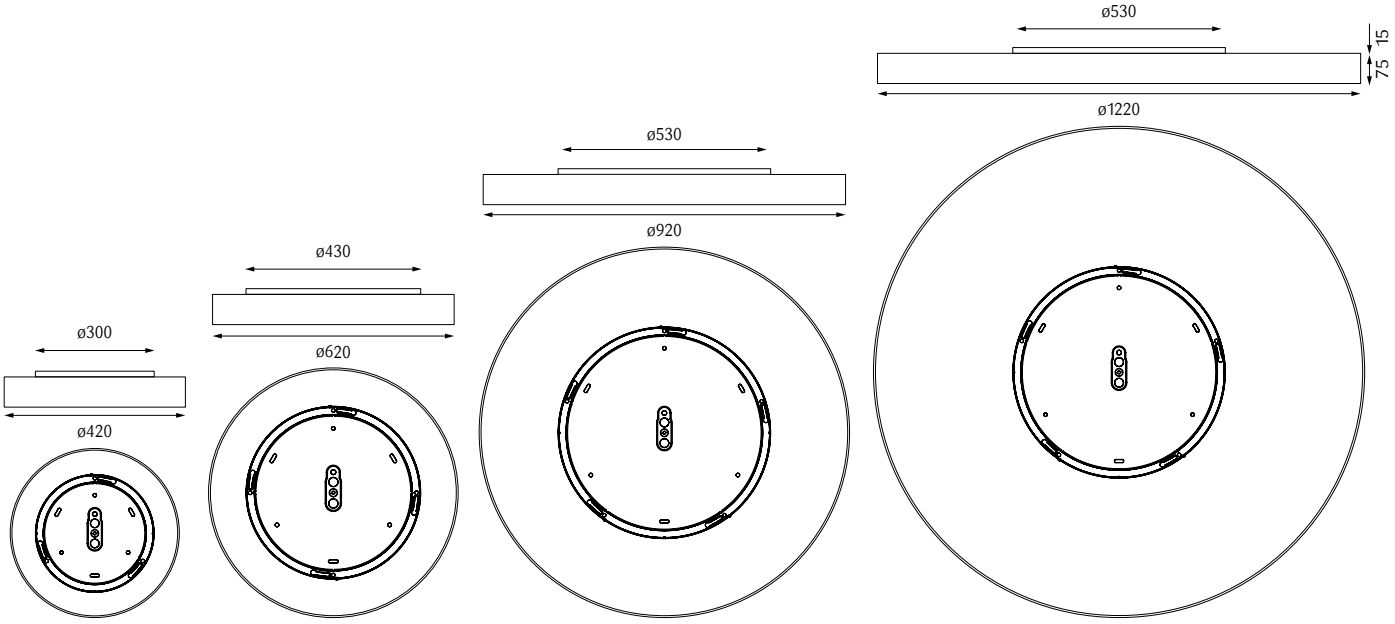

in use ...

lili


➔ Schulhaus Gräwimatt,
Schattdorf/Switzerland
Planner: G&A Architekten AG
Altdorf/Switzerland







lili

Hängeleuchte | Pendant luminaire | Suspension

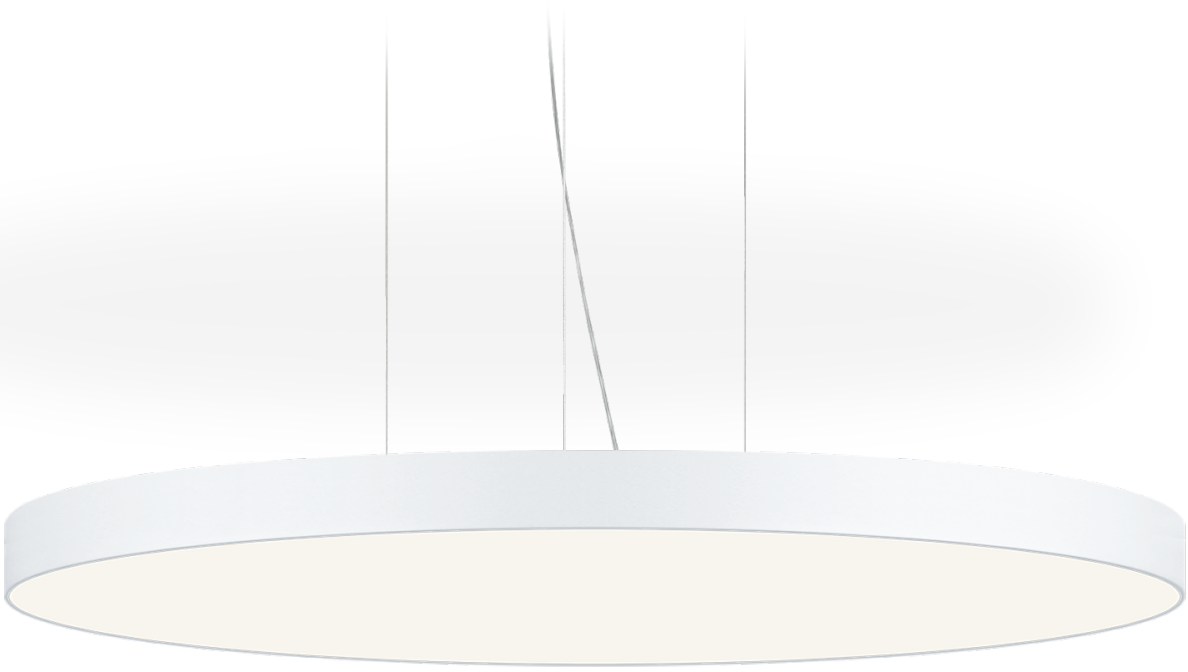



satiné



microprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white

up to 141lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

microprism for reduced brightness (LRA)

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

RAL 9006 RAL 9016

1 Dimension

ø 330 mm	**033**
ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber	silver	argent (RAL 9006)	**9006**
weiß	white	blanc (RAL 9016)	**9016**

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**
2700 - 6500 K dynamic white	**HCL**

4 Output

low output non-dim	**L1**
high output DALI dim	**H3**
dynamic white	**X3**

5 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple


ø 420 mm, weiß | white | blanc, 4000 K, high output DALI dim, satiné

F50H042-9016C1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
	high output		low output		high output		low output		dynamic white	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 330 mm	1864 lm	1583 lm	957 lm	850 lm	1934 lm	1642 lm	991 lm	879 lm	1819 lm	1545 lm
ø 420 mm	2910 lm	2470 lm	1591 lm	1413 lm	3019 lm	2563 lm	1648 lm	1460 lm	2840 lm	2410 lm
ø 620 mm	6132 lm	5344 lm	3010 lm	2734 lm	6353 lm	5523 lm	3104 lm	2825 lm	5914 lm	5154 lm
ø 920 mm	12521 lm	10795 lm	6334 lm	5631 lm	12988 lm	11157 lm	6543 lm	5820 lm	12220 lm	10531 lm
ø 1220 mm	22720 lm	20348 lm	11828 lm	10746 lm	23507 lm	21029 lm	12223 lm	11106 lm	21246 lm	19027 lm

System Power (W)	high output	low output	dynamic white
ø 330 mm	18,5 W	11 W	19,5 W
ø 420 mm	27 W	15 W	27 W
ø 620 mm	51 W	25 W	53 W
ø 920 mm	96 W	47 W	99 W
ø 1220 mm	172 W	86 W	182 W

Weight (kg)	
ø 330 mm	4,8 kg
ø 420 mm	5,4 kg
ø 620 mm	10,2 kg
ø 920 mm	16,5 kg
ø 1220 mm	22,7 kg

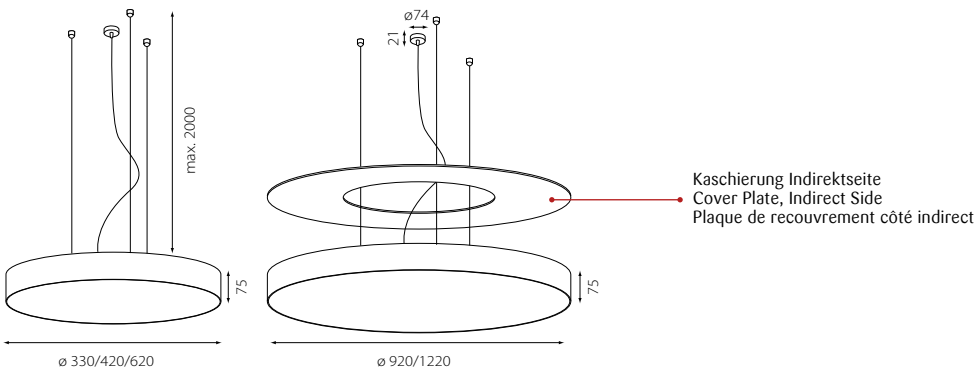



Optionales Zubehör | Optional accessory | Accessoire optionnel

Kaschierung Indirektseite 920 mm	Cover Plate, Indirect Side	Plaque de recouvrement côté indirect	weiß	white	blanc	**F50-KAS-092-9016**
			silber	silver	argent	**F50-KAS-092-9006**
Kaschierung Indirektseite 1220 mm	Cover Plate, Indirect Side	Plaque de recouvrement côté indirect	weiß	white	blanc	**F50-KAS-122-9016**
			silber	silver	argent	**F50-KAS-122-9006**


lili direct / indirect

Hängeleuchte | Pendant luminaire | Suspension

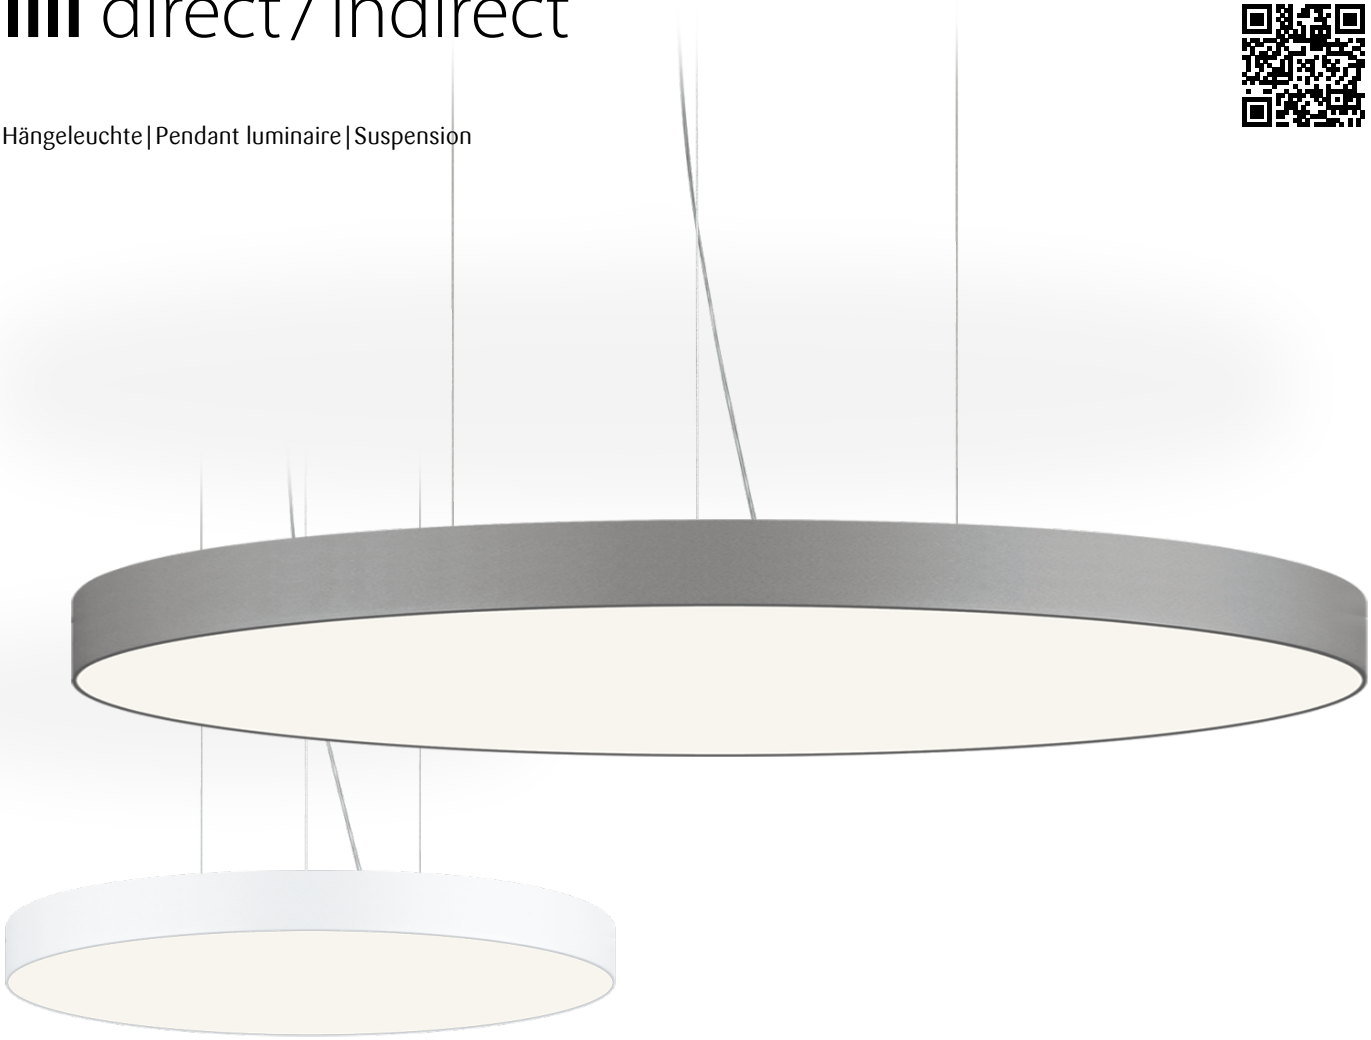





low output satiné



low output microprism



high output satiné



high output microprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K

up to 142 lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct/indirect

satiné

microprism for reduced brightness (LRA)

Options

Emergency lighting 1h / 3h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

RAL 9006 RAL 9016

1 Dimension

ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber | silver | argent (RAL 9006)	**9006**
weiß | white | blanc (RAL 9016)	**9016**

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**

4 Output

low output non-dim	**L1**
high output DALI dim	**H3**

5 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple


ø 420 mm, weiß | white | blanc, 4000 K, high output DALI dim, satiné

F50H042-9016C2840H3S

Luminous Flux (lm)	3000 K				4000 K			
	high output		low output		high output		low output	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 420 mm	4671 lm	4229 lm	2649 lm	2473 lm	4900 lm	4442 lm	2782 lm	2594 lm
ø 620 mm	8763 lm	7975 lm	5630 lm	5381 lm	9150 lm	8334 lm	5898 lm	5641 lm
ø 920 mm	16057 lm	14331 lm	9870 lm	9167 lm	16773 lm	14941 lm	10328 lm	9604 lm
ø 1220 mm	26256 lm	23883 lm	15363 lm	14282 lm	27291 lm	24812 lm	16007 lm	14890 lm

System Power (W)	high output	low output
ø 420 mm	46 W	25 W
ø 620 mm	78 W	51 W
ø 920 mm	135 W	85 W
ø 1220 mm	209 W	124 W

Weight (kg)	
ø 420 mm	5,4 kg
ø 620 mm	10,2 kg
ø 920 mm	16,5 kg
ø 1220 mm	22,7 kg

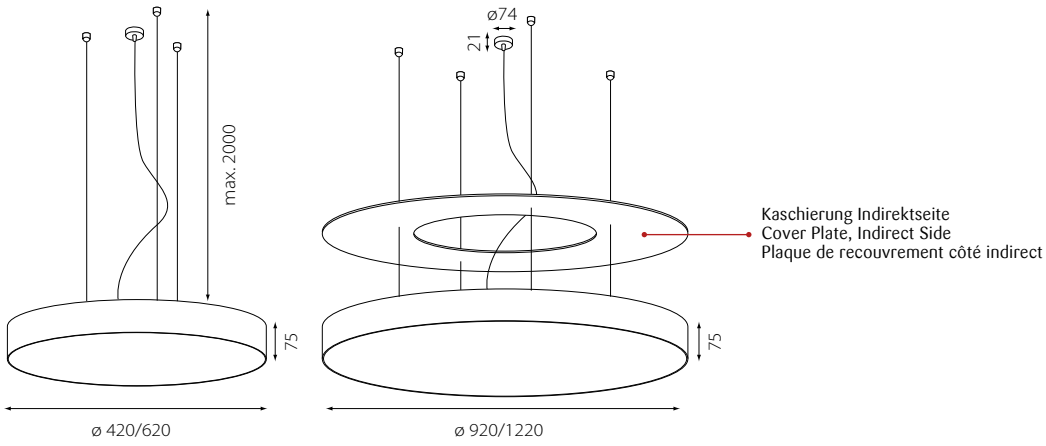


Optionales Zubehör | Optional accessory | Accessoire optionnel


Kaschierung Indirektseite 920 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect	weiß | white | blanc	**F50-KAS-092-9016**
	silber | silver | argent	**F50-KAS-092-9006**
Kaschierung Indirektseite 1220 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect	weiß | white | blanc	**F50-KAS-122-9016**
	silber | silver | argent	**F50-KAS-122-9006**


lili

Pende | Rod suspension | Suspension rigide



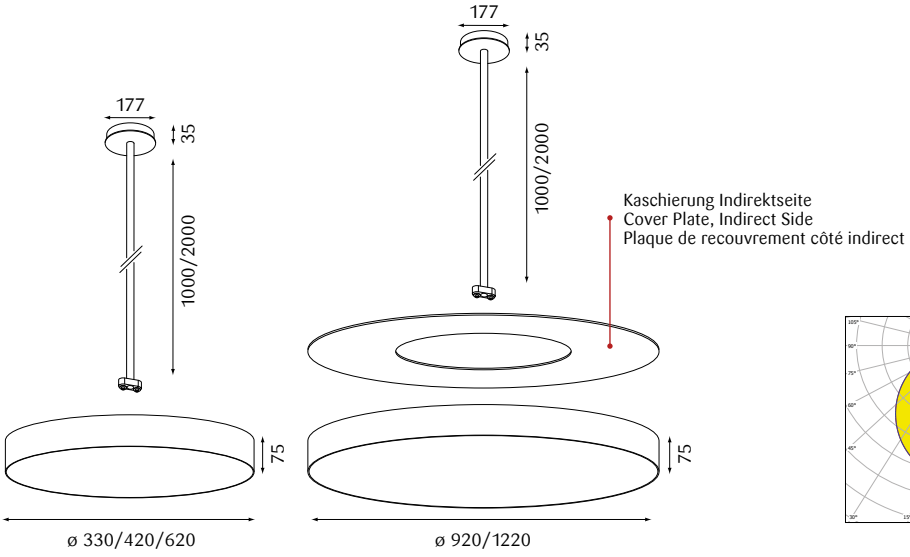


satiné


microprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white
up to 141lm/W
R_a>80, MacAdam 3
non-dim / DALI dim
Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct
satiné
microprism for reduced brightness (LRA)

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)
RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

RAL 9006 RAL 9016

1 Dimension

ø 330 mm	**033**
ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber	silver	argent (RAL 9006)	**9006**
weiß	white	blanc (RAL 9016)	**9016**

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**
2700 - 6500 K dynamic white	**HCL**

4 Output

low output non-dim	**L1**
high output DALI dim	**H3**
dynamic white	**X3**

5 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple

ø 420 mm, weiß | white | blanc, 4000 K, high output DALI dim, satiné

F50A042-9016C1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
	high output		low output		high output		low output		dynamic white	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 330 mm	1864 lm	1583 lm	957 lm	850 lm	1934 lm	1642 lm	991 lm	879 lm	1819 lm	1545 lm
ø 420 mm	2910 lm	2470 lm	1591 lm	1413 lm	3019 lm	2563 lm	1648 lm	1460 lm	2840 lm	2410 lm
ø 620 mm	6132 lm	5344 lm	3010 lm	2734 lm	6353 lm	5523 lm	3104 lm	2825 lm	5914 lm	5154 lm
ø 920 mm	12521 lm	10795 lm	6334 lm	5631 lm	12988 lm	11157 lm	6543 lm	5820 lm	12220 lm	10531 lm
ø 1220 mm	22720 lm	20348 lm	11828 lm	10746 lm	23507 lm	21029 lm	12223 lm	11106 lm	21246 lm	19027 lm

System Power (W)	high output	low output	dynamic white
ø 330 mm	18,5 W	11 W	19,5 W
ø 420 mm	27 W	15 W	27 W
ø 620 mm	51 W	25 W	53 W
ø 920 mm	96 W	47 W	99 W
ø 1220 mm	172 W	86 W	182 W

Weight (kg)	
ø 330 mm	4,3 kg
ø 420 mm	4,9 kg
ø 620 mm	9,7 kg
ø 920 mm	16,0 kg
ø 1220 mm	22,2 kg

Optionales Zubehör für Pendemontage | Optional accessory | Accessoire optionnel

Pende starr	Rod suspension	Suspension rigide	weiß	white	blanc	1000 mm	**F50-PEN-100-9016**
			silber	silver	argent	1000 mm	**F50-PEN-100-9006**
Pende starr	Rod suspension	Suspension rigide	weiß	white	blanc	2000 mm	**F50-PEN-200-9016**
			silber	silver	argent	2000 mm	**F50-PEN-200-9006**

Optionales Zubehör | Optional accessory | Accessoire optionnel

Kaschierung Indirektseite 920 mm	Cover Plate, Indirect Side	Plaque de recouvrement côté indirect	weiß	white	blanc	**F50-KAS-092-9016**
			silber	silver	argent	**F50-KAS-092-9006**
Kaschierung Indirektseite 1220 mm	Cover Plate, Indirect Side	Plaque de recouvrement côté indirect	weiß	white	blanc	**F50-KAS-122-9016**
			silber	silver	argent	**F50-KAS-122-9006**

in use ...

lili


➔ Schulhaus Gräwimatt,
Schattdorf/Switzerland
Planner: G&A Architekten AG
Altdorf/Switzerland






lili frame

Einbauleuchte | Recessed luminaire | Luminaire encastré

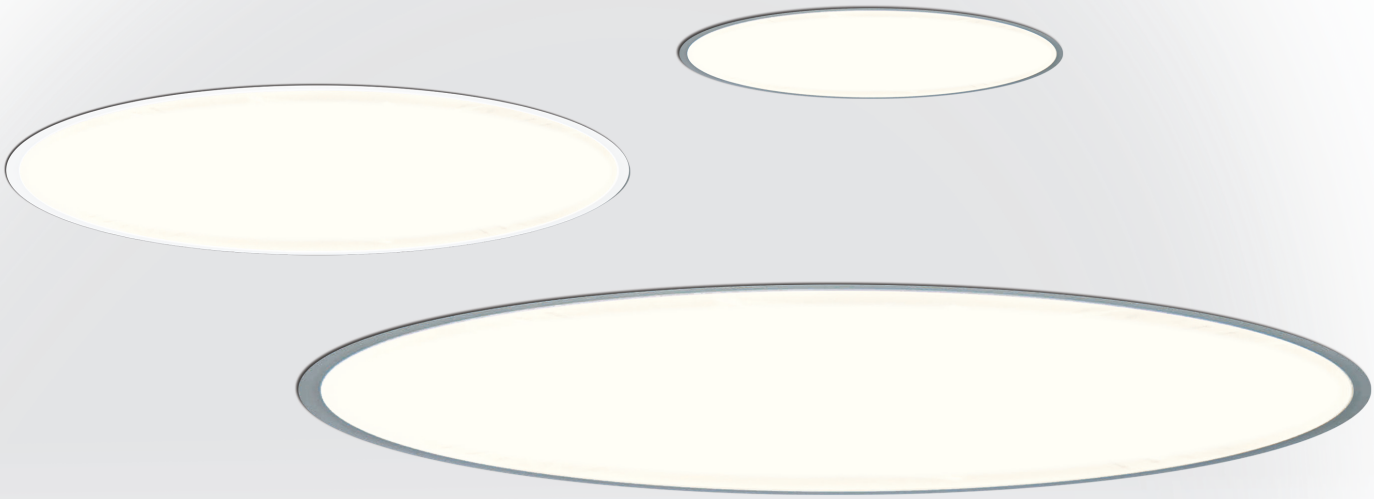


Cut-out ✂

ø 250 mm	ø 237 / 115 mm
ø 350 mm	ø 337 / 115 mm
ø 440 mm	ø 427 / 115 mm
ø 640 mm	ø 627 / 115 mm
ø 940 mm	ø 927 / 115 mm
ø 1240 mm	ø 1227 / 115 mm



satiné



microprism

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white

up to 155 lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

microprism for reduced brightness (LRA)

Options

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 22)

Cut out ✂

lili 250: ø 237 ⇧ 115 mm, lili 350: ø 337 ⇧ 115 mm, lili 440: ø 427 ⇧ 115 mm,

lili 640: ø 627 ⇧ 115 mm, lili 940: ø 927 ⇧ 115 mm, lili 1240: ø 1227 ⇧ 115 mm

RAL 9006 RAL 9016

1 Dimension

ø 250 mm (non dynamic white)	**025**
ø 350 mm	**035**
ø 440 mm	**044**
ø 640 mm	**064**
ø 940 mm	**094**
ø 1240 mm	**124**

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber	silver	argent (RAL 9006)	**9006**
weiß	white	blanc (RAL 9016)	**9016**

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**
2700 - 6500 K dynamic white	**HCL**

4 Output

low output non-dim	**L1**
high output DALI dim	**H3**
dynamic white	**X3**

5 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple

ø 440 mm, weiß | white | blanc, 4000 K, high output DALI dim, satiné


F50E044-9016C1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
Housing Colour	high output		low output		high output		low output		dynamic white	
9006	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 250 mm	1015 lm	856 lm	558 lm	470 lm	1066 lm	904 lm	586 lm	501 lm	-	-
ø 350 mm	1640 lm	1396 lm	1007 lm	863 lm	1740 lm	1479 lm	1058 lm	915 lm	1580 lm	1331 lm
ø 440 mm	2670 lm	2207 lm	1586 lm	1312 lm	2755 lm	2316 lm	1665 lm	1377 lm	2543 lm	2167 lm
ø 640 mm	5790 lm	4978 lm	3000 lm	2562 lm	6119 lm	5212 lm	3150 lm	2733 lm	5775 lm	4779 lm
ø 940 mm	12177 lm	10349 lm	6202 lm	5255 lm	12786 lm	10853 lm	6511 lm	5511 lm	10902 lm	9731 lm
ø 1240 mm	22850 lm	19422 lm	11804 lm	10001 lm	23994 lm	20366 lm	12392 lm	10488 lm	20893 lm	18672 lm

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
Housing Colour	high output		low output		high output		low output		dynamic white	
9016	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 250 mm	1248 lm	1020 lm	686 lm	548 lm	1314 lm	1066 lm	709 lm	602 lm	-	-
ø 350 mm	1939 lm	1679 lm	1162 lm	997 lm	2036 lm	1746 lm	1216 lm	1055 lm	1862 lm	1609 lm
ø 440 mm	3014 lm	2574 lm	1819 lm	1509 lm	3165 lm	2663 lm	1847 lm	1583 lm	2911 lm	2479 lm
ø 640 mm	6479 lm	5613 lm	3340 lm	2890 lm	6803 lm	5687 lm	3417 lm	2917 lm	6457 lm	5376 lm
ø 940 mm	13038 lm	11670 lm	6665 lm	5778 lm	13708 lm	11841 lm	7016 lm	5881 lm	12195 lm	10948 lm
ø 1240 mm	24467 lm	21900 lm	12685 lm	10997 lm	25724 lm	22222 lm	13353 lm	11194 lm	23372 lm	21006 lm

System Power (W)	high output	low output	dynamic white
ø 250 mm	14,5 W	7,5 W	-
ø 350 mm	18,5 W	11 W	19,5 W
ø 440 mm	27 W	15 W	28 W
ø 640 mm	51 W	25 W	53 W
ø 940 mm	96 W	47 W	99 W
ø 1240 mm	172 W	86 W	190 W

Weight (kg)	
ø 250 mm	0,7 kg
ø 350 mm	2,4 kg
ø 440 mm	3,7 kg
ø 640 mm	7,4 kg
ø 940 mm	15,9 kg
ø 1240 mm	25,9 kg

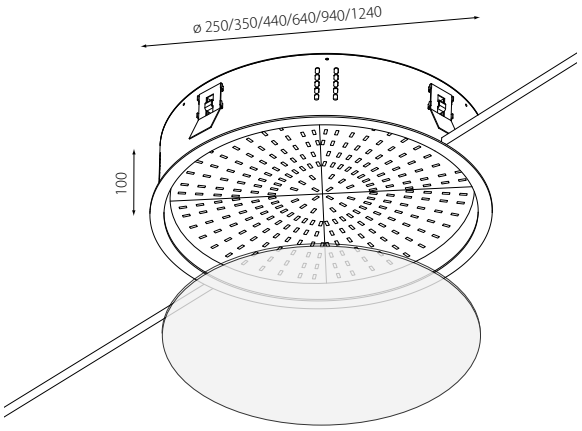


lili frameless


Einbauleuchte | Recessed luminaire | Luminaire encastré

Cut-out ✂

ø 330 mm	ø 337 / 115 mm
ø 420 mm	ø 427 / 115 mm
ø 620 mm	ø 627 / 115 mm
ø 920 mm	ø 927 / 115 mm
ø 1220 mm	ø 1227 / 115 mm



satiné



microprism

Housing

Aluminium RAL 9016

230V IP20 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

A++ A

LED

3000 K, 4000 K, dynamic white

up to 155 lm/W

R_a>80, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

microprism for reduced brightness (LRA)

Cut out ✂

lili 330: ø337⇧115 mm, lili 420: ø427⇧115 mm,

lili 620: ø627⇧115 mm, lili 920: ø927⇧115 mm, lili 1220: ø1227⇧115 mm

1 Dimension

ø 330 mm	**033**
ø 420 mm	**042**
ø 620 mm	**062**
ø 920 mm	**092**
ø 1220 mm	**122**

2 Farbtemperatur | Colour temperature | Température de couleur

3000 K	**830**
4000 K	**840**
2700 - 6500 K dynamic white	**HCL**

3 Output

low output non-dim	**L1**
high output DALI dim	**H3**
dynamic white	**X3**

4 Diffusoren | Diffusers | Diffuseurs

satiné	**S**
microprism	**M**

Beispiel | Example | Exemple


ø 420 mm, 4000 K, high output, DALI dim, satiné

F50F042-9016C1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K	
	high output		low output		high output		low output		dynamic white	
	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism	satiné	microprism
ø 330 mm	1939 lm	1679 lm	1162 lm	997 lm	2036 lm	1746 lm	1216 lm	1055 lm	1862 lm	1609 lm
ø 420 mm	3014 lm	2574 lm	1819 lm	1509 lm	3165 lm	2663 lm	1847 lm	1583 lm	2911 lm	2479 lm
ø 620 mm	6479 lm	5613 lm	3340 lm	2890 lm	6803 lm	5687 lm	3417 lm	2917 lm	6457 lm	5376 lm
ø 920 mm	13038 lm	11670 lm	6665 lm	5778 lm	13708 lm	11841 lm	7016 lm	5881 lm	12195 lm	10948 lm
ø 1220 mm	24467 lm	21900 lm	12685 lm	10997 lm	25724 lm	22222 lm	13353 lm	11194 lm	23372 lm	21006 lm

System Power (W)	high output	low output	dynamic white
ø 330 mm	18,5 W	11 W	19,5 W
ø 420 mm	27 W	15 W	28 W
ø 620 mm	51 W	25 W	53 W
ø 920 mm	96 W	47 W	99 W
ø 1220 mm	172 W	86 W	190 W

Weight (kg)	
ø 330 mm	2,4 kg
ø 420 mm	3,7 kg
ø 620 mm	7,4 kg
ø 920 mm	15,9 kg
ø 1220 mm	25,9 kg

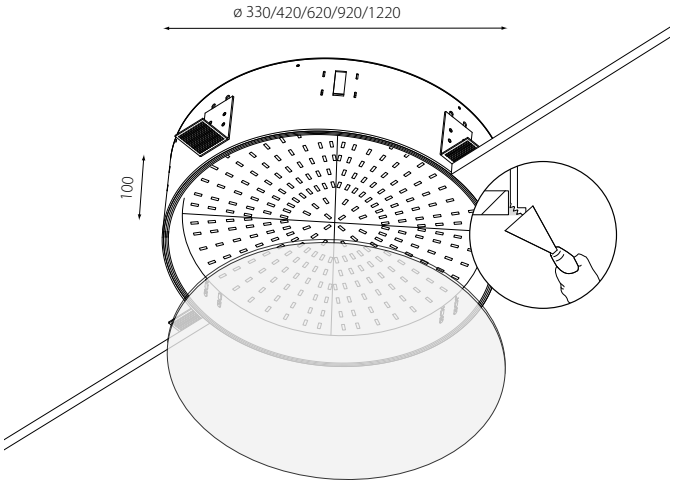


in use ...

lili/liha frameless

➔ Sparkasse, Eichstätt/Germany
Planner: Visio, Schwäbisch Gmünd




Münzeinzahlung
auf das Konto

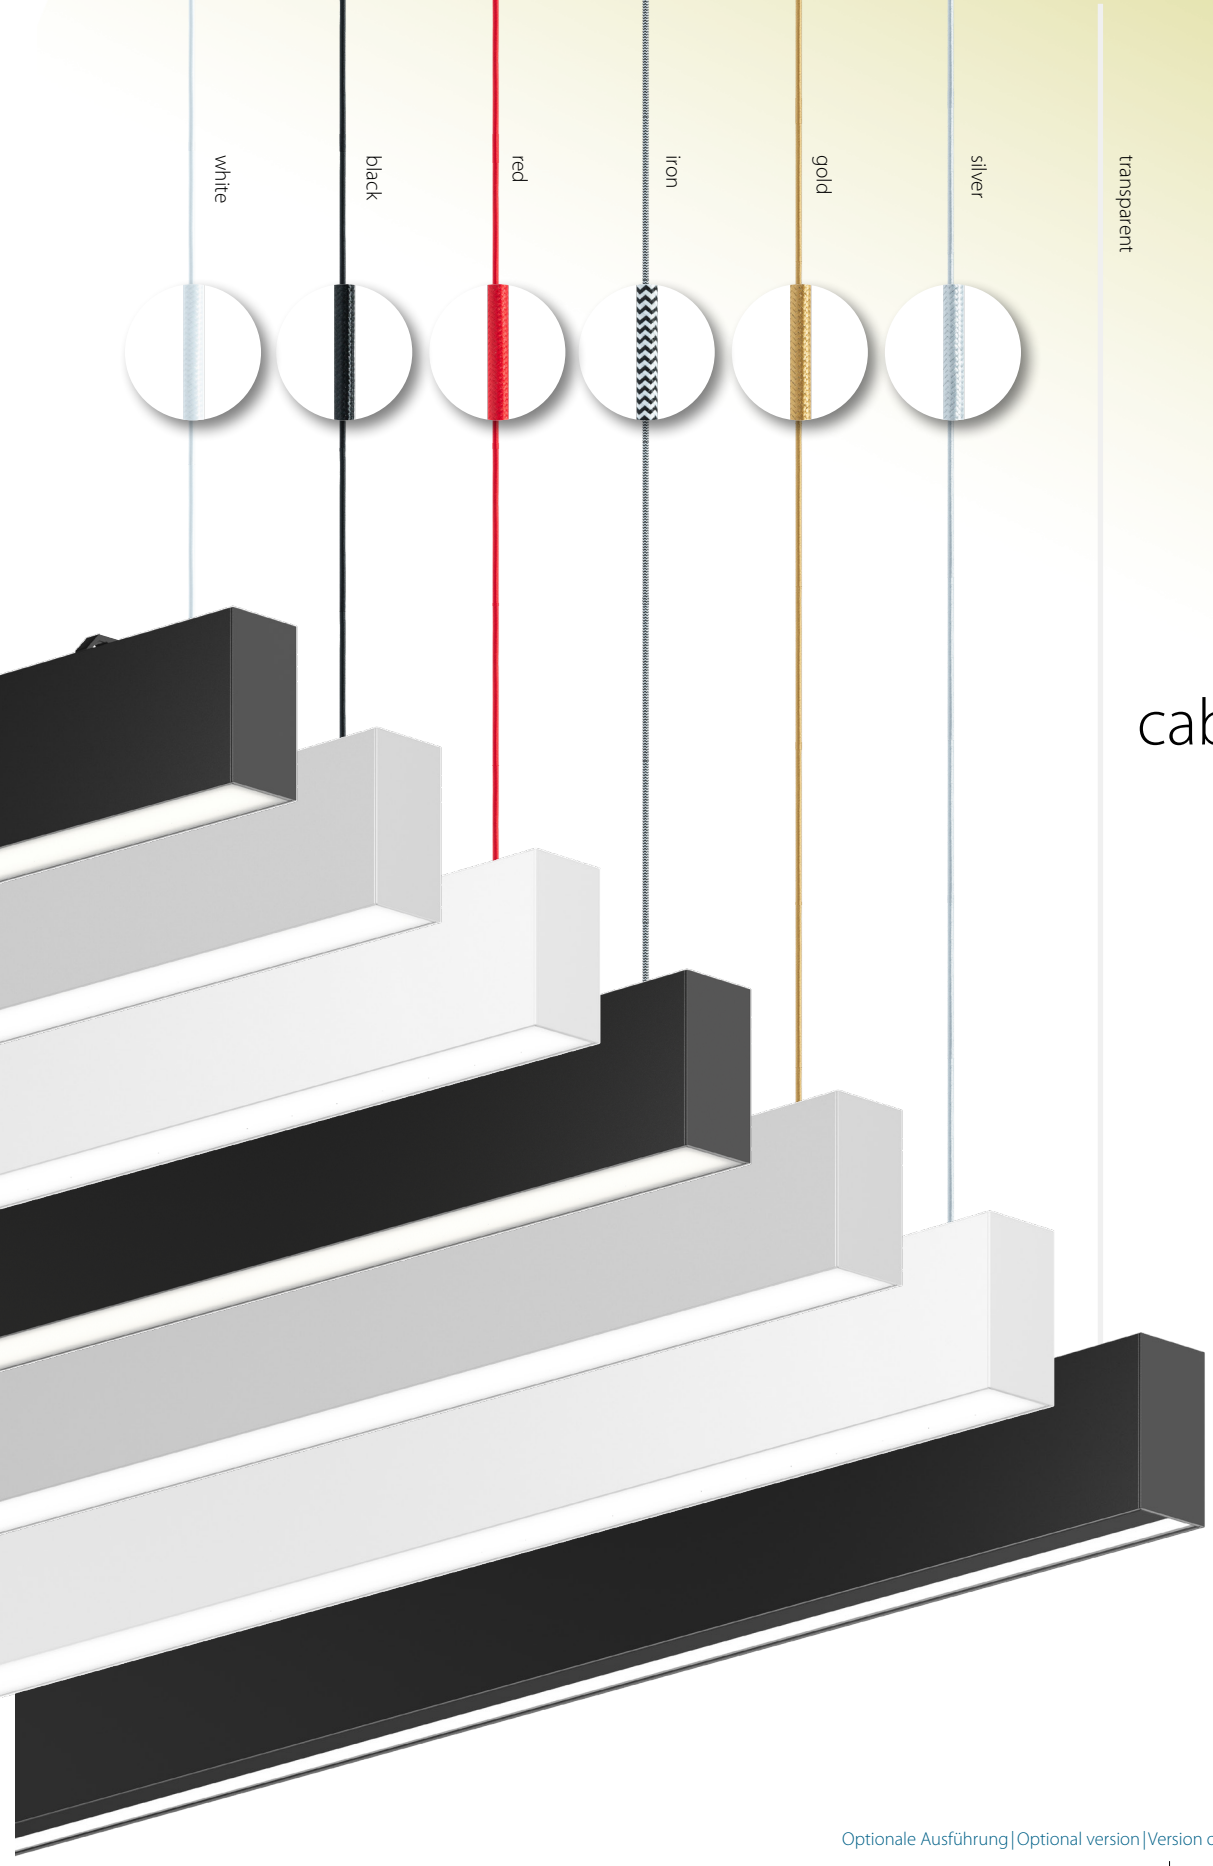

cable colours


Optionale Ausführung | Optional version | Version optionnelle

Einspeiskabel
Suspension cable
Alimentation cable
Cavo di alimentizione

2500 mm
5 x 0,75 mm²

white	T65-EIN-WHITE
black	T65-EIN-BLACK
red	T65-EIN-RED
iron	T65-EIN-IRON
gold	T65-EIN-GOLD
silver	T65-EIN-SILVER

Transparent cable incl. (standard version)

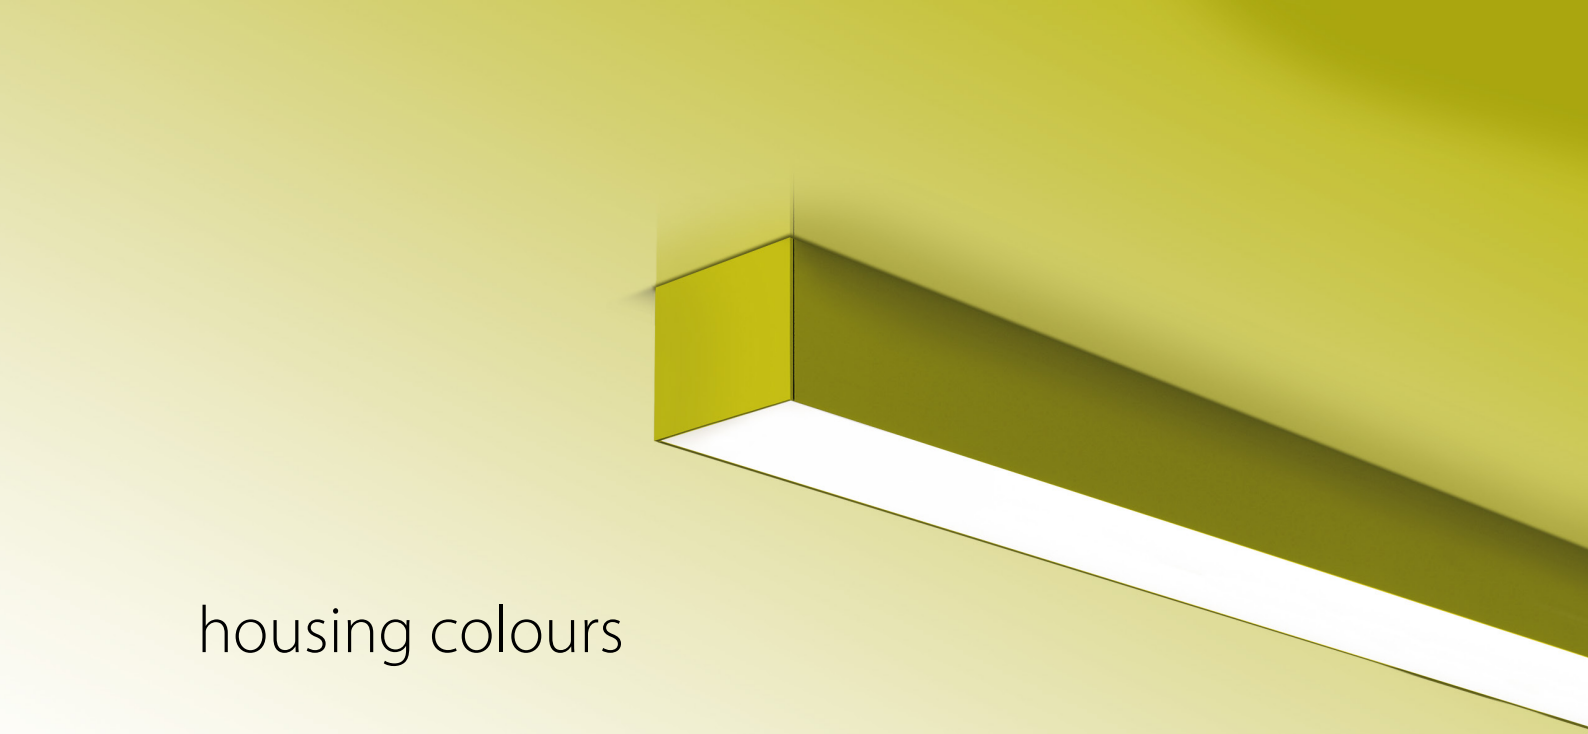

housing colours

Auswahl der beliebtesten RAL-Farben aus unserem Leuchtensortiment.
A selection of the most popular colours of our range of luminaires.
Sélection des couleurs RAL les plus demandées pour notre gamme de luminaires.
Selezione dei colori RAL piú richesti per la nostra gamma di apprecchio.

STANDARD RAL 9005 RAL 9006 RAL 9016

RAL 1001	RAL 1003	RAL 1004	RAL 1013	RAL 1014	RAL 1015	RAL 1016	RAL 1018	RAL 1019	RAL 1021
RAL 1023	RAL 1035	RAL 1036	RAL 2000	RAL 2001	RAL 2003	RAL 2003	RAL 2009	RAL 3000	RAL 3002
RAL 3003	RAL 3009	RAL 3011	RAL 3013	RAL 3016	RAL 3018	RAL 3020	RAL 3031	RAL 3032	RAL 3033
RAL 4005	RAL 4010	RAL 4011	RAL 4012	RAL 5002	RAL 5004	RAL 5010	RAL 5012	RAL 5013	RAL 5018
RAL 5023	RAL 5024	RAL 5025	RAL 5026	RAL 6013	RAL 6014	RAL 6017	RAL 6018	RAL 6019	RAL 6027
RAL 6034	RAL 7001	RAL 7004	RAL 7006	RAL 7011	RAL 7012	RAL 7013	RAL 7015	RAL 7016	RAL 7021
RAL 7022	RAL 7024	RAL 7030	RAL 7031	RAL 7032	RAL 7035	RAL 7037	RAL 7038	RAL 7039	RAL 7043
RAL 7044	RAL 7047	RAL 7048	RAL 8003	RAL 8011	RAL 8012	RAL 8016	RAL 8017	RAL 8019	RAL 8024
RAL 8028	RAL 8029	RAL 9001	RAL 9002	RAL 9011	RAL 9017	RAL 9022	Gunnery **GREY**	Capital **COPPER**	Glaring **GOLD**

planlicht

Headquarters & Production

6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com, www.planlicht.com