






lilibet

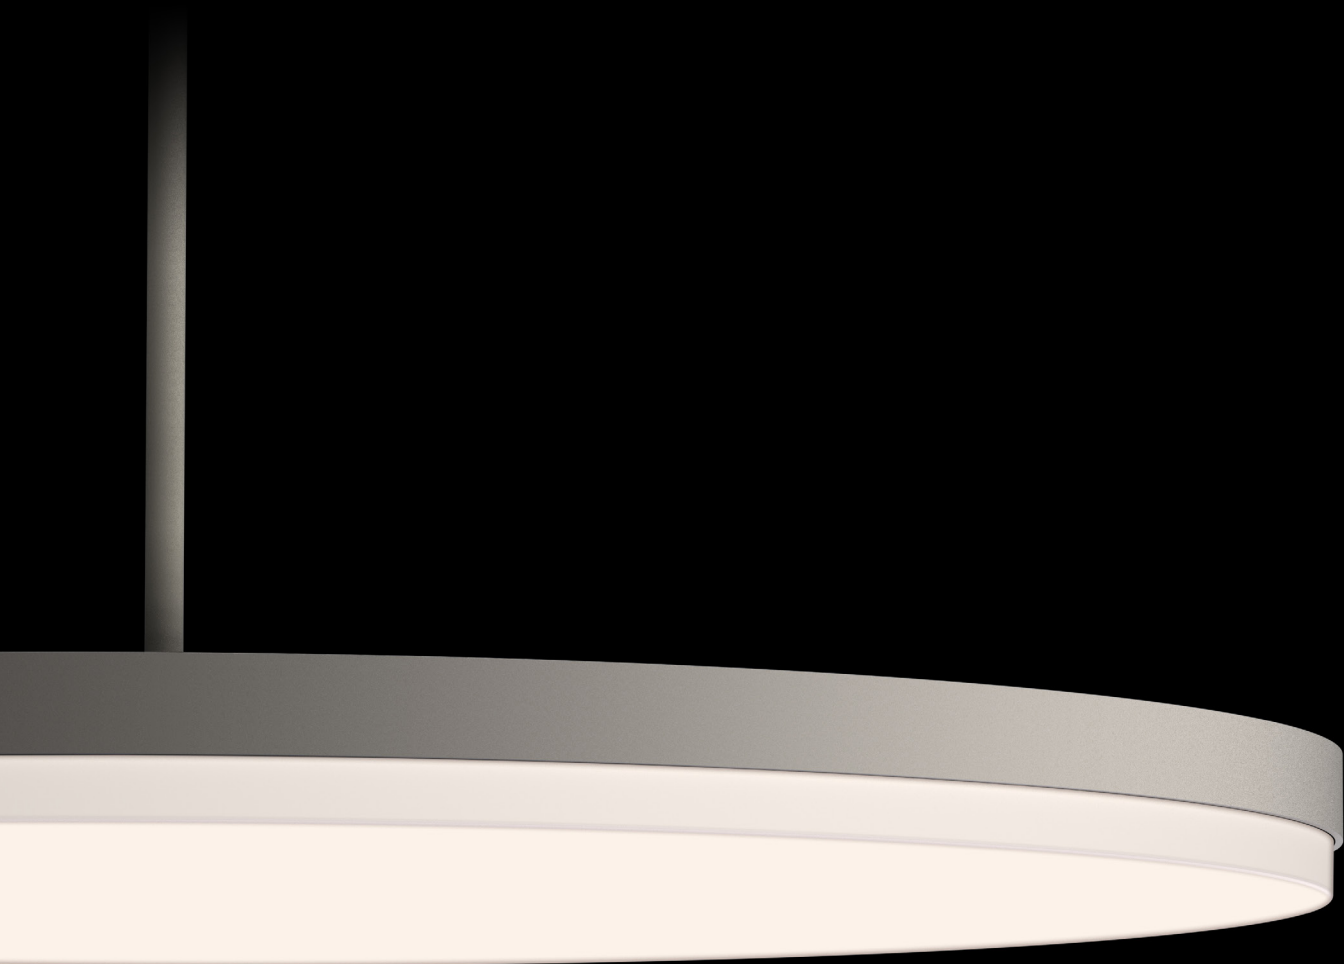


Aufbauleuchte | Surface-mount luminaire | Luminaire en saillie



direct



direct/indirect low output



direct/indirect high output

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016, powder coated black RAL 9005

230V IP20 IP54 $R_g > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000 K, 4000 K, dynamic white

up to 144 lm/W

$R_g > 80$, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 10)



1 Dimension

ø 330 mm (lilibet direct only)	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber silver argent (RAL 9006)	9006
weiß white blanc (RAL 9016)	9016
schwarz black noir (RAL 9005)	9005

3 Schutzart | Protection rating | Indice de protection

IP20	C
IP54 (lilibet direct only, non Emergency lighting)	Q

4 direct/indirect

direct	1
direct/indirect (IP20 only)	2

5 Farbtemperatur | Colour temperature | Température de couleur

3000 K	830
4000 K	840
2700 - 6500 K dynamic white (lilibet direct only)	HCL

6 Output

low output non-dim	L1
high output DALI dim	H3
dynamic white (lilibet direct only)	X3

Beispiel | Example | Exemple

ø 420 mm, weiß | white | blanc, IP54, 4000 K, high output DALI dim

F52A042-9016Q1840H3S

Luminous Flux (lm)


	3000 K				4000 K				2700 - 6500 K	
	high output		low output		high output		low output		dynamic white	
	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	direct	
ø 330 mm	1994 lm	-	1023 lm	-	2069 lm	-	1060 lm	-	1947 lm	
ø 420 mm	2997 lm	3941 lm	1638 lm	2615 lm	3110 lm	4160 lm	1697 lm	2782 lm	2926 lm	
ø 620 mm	6481 lm	7197 lm	3071 lm	4120 lm	6480 lm	7524 lm	3165 lm	4324 lm	5901 lm	
ø 920 mm	12647 lm	14479 lm	6397 lm	8385 lm	13117 lm	15141 lm	6609 lm	8799 lm	12343 lm	
ø 1220 mm	22948 lm	24679 lm	11945 lm	13877 lm	23743 lm	25661 lm	12346 lm	14478 lm	21547 lm	

System Power (W)

	high output		low output		dynamic white
	direct	direct/indirect	direct	direct/indirect	direct
ø 330 mm	18,5 W	-	11 W	-	19 W
ø 420 mm	27 W	38 W	15 W	25 W	27 W
ø 620 mm	51 W	62 W	25 W	36 W	52 W
ø 920 mm	96 W	116 W	47 W	65 W	96 W
ø 1220 mm	172 W	191 W	86 W	104 W	172 W

Weight (kg)

ø 330 mm	4,3 kg
ø 420 mm	4,9 kg
ø 620 mm	9,7 kg
ø 920 mm	16,0 kg
ø 1220 mm	22,2 kg




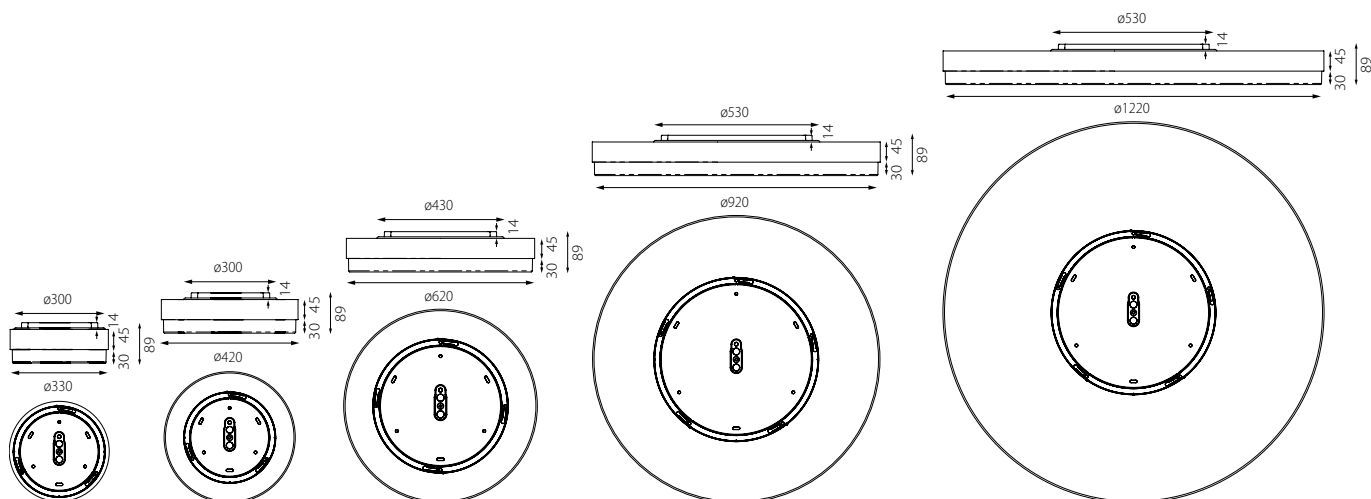




Hängeleuchte | Pendant luminaire | Suspension



Kaschierung Indirektseite
Cover Plate, Indirect Side
Plaque de recouvrement côté indirect

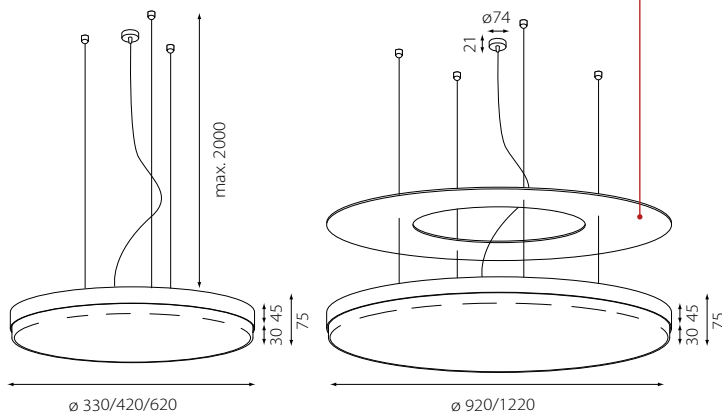

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016, powder coated black RAL 9005

230V IP20 $R_g > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000 K, 4000 K, dynamic white

up to 139lm/W

$R_a > 80$, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000h

Optic

direct

direcz/indirect

satiné

Options

Emergency lighting 3h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 10)



1 Dimension

ø 330 mm	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber silver argent (RAL 9006)	9006
weiß white blanc (RAL 9016)	9016
schwarz black noir (RAL 9005)	9005

3 Optic

direct	1
direct/indirect (ø420/620/920/1220 mm only)	2

4 Farbtemperatur | Colour temperature | Température de couleur

3000 K	830
4000 K	840
2700 - 6500 K dynamic white (lilibet direct only)	HCL

5 Output

low output non-dim	L1
high output DALI dim	H3
dynamic white (lilibet direct only)	X3

Beispiel | Example | Exemple

ø 420 mm, weiß | white | blanc, 4000 K, high output DALI dim

F52H042-9016C1840H3S

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K
	high output		low output		high output		low output		dynamic white
	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	satiné
ø 330 mm	1994 lm	-	1023 lm	-	2069 lm	-	1060 lm	-	1947 lm
ø 420 mm	2997 lm	4670 lm	1638 lm	2649 lm	3110 lm	4899 lm	1697 lm	2782 lm	2926 lm
ø 620 mm	6481 lm	8762 lm	3071 lm	5632 lm	6480 lm	9150 lm	3165 lm	5899 lm	5901 lm
ø 920 mm	12647 lm	16057 lm	6398 lm	9870 lm	13117 lm	16772 lm	6609 lm	10327 lm	12343 lm
ø 1220 mm	22948 lm	26256 lm	11945 lm	15364 lm	23743 lm	27291 lm	12346 lm	16008 lm	21547 lm

System Power (W)	high output		low output		dynamic white
	direct	direct/indirect	direct	direct/indirect	direct
ø 330 mm	19 W	-	11 W	-	19 W
ø 420 mm	27 W	46 W	15 W	25 W	27 W
ø 620 mm	51 W	78 W	25 W	51 W	51 W
ø 920 mm	96 W	135 W	47 W	85 W	96 W
ø 1220 mm	172 W	209 W	86 W	124 W	172 W

Weight (kg)

ø 330 mm	4,8 kg
ø 420 mm	5,4 kg
ø 620 mm	10,2 kg
ø 920 mm	16,5 kg
ø 1220 mm	22,7 kg

Optionales Zubehör | Optional accessory | Accessoire optionnel



Kaschierung Indirektseite 920 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect

weiß white blanc	F50-KAS-092-9016
silber silver argent	F50-KAS-092-9006
schwarz black noir	F50-KAS-092-9005
weiß white blanc	F50-KAS-122-9016
silber silver argent	F50-KAS-122-9006
schwarz black noir	F50-KAS-122-9005

Kaschierung Indirektseite 1220 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect



Pende | Rod suspension | Suspension rigide

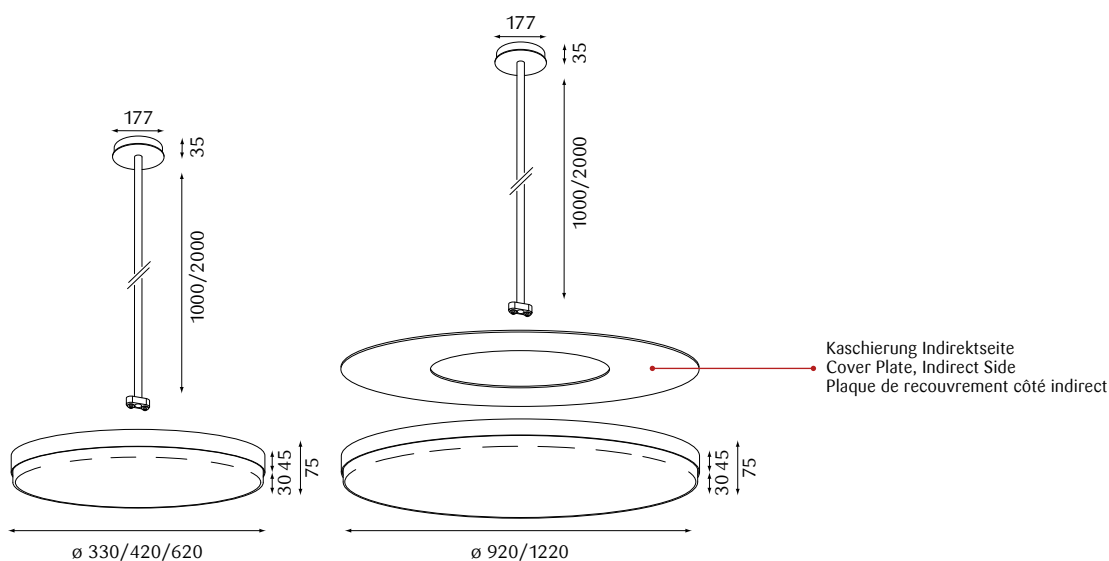

Housing

powder coated Aluminium RAL 9006, powder coated white RAL 9016, powder coated black RAL 9005

230V IP20 $R_g > 80$ up to L80/50.000h MacAdam 3 DALI switchDIM



LED

3000 K, 4000 K, dynamic white

up to 144 lm/W

$R_a > 80$, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG0 IEC 62471

Lifetime

up to L80 / 50.000 h

Optic

direct

satiné

0

Options

Emergency lighting 3 h (more information planlicht 18 p. 373)

RAL nach Wahl | RAL of your choice | RAL au choix (more information p. 10)



1 Dimension

ø 330 mm	033
ø 420 mm	042
ø 620 mm	062
ø 920 mm	092
ø 1220 mm	122

2 Gehäusefarbe | Housing colour | Couleur du luminaire

silber silver argent (RAL 9006)	9006
weiß white blanc (RAL 9016)	9016
schwarz black noir (RAL 9005)	9005

3 Farbtemperatur | Colour temperature | Température de couleur

3000 K	830
4000 K	840
2700 - 6500 K dynamic white (lilibet direct only)	HCL

4 Output

low output non-dim	L1
high output DALI dim	H3
dynamic white	X3

Beispiel | Example | Exemple

ø 420 mm, weiß | white | blanc, IP20, 4000 K, high output DALI dim

F52A042-9016C1840H3S

Luminous Flux (lm)

Luminous Flux (lm)	3000 K				4000 K				2700 - 6500 K
	high output		low output		high output		low output		dynamic white
	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	direct	direct/indirect	direct
ø 330 mm	1994 lm	-	1023 lm	-	2069 lm	-	1060 lm	-	1947 lm
ø 420 mm	2997 lm	3941 lm	1638 lm	2615 lm	3110 lm	4160 lm	1697 lm	2782 lm	2926 lm
ø 620 mm	6481 lm	7197 lm	3071 lm	4120 lm	6480 lm	7524 lm	3165 lm	4324 lm	5901 lm
ø 920 mm	12647 lm	14479 lm	6397 lm	8385 lm	13117 lm	15141 lm	6609 lm	8799 lm	12343 lm
ø 1220 mm	22948 lm	24679 lm	11945 lm	13877 lm	23743 lm	25661 lm	12346 lm	14478 lm	21547 lm

System Power (W)

	high output		low output		dynamic white
	direct	direct/indirect	direct	direct/indirect	
ø 330 mm	18,5 W	-	11 W	-	19 W
ø 420 mm	27 W	38 W	15 W	25 W	27 W
ø 620 mm	51 W	62 W	25 W	36 W	52 W
ø 920 mm	96 W	116 W	47 W	65 W	96 W
ø 1220 mm	172 W	191 W	86 W	104 W	172 W

Weight (kg)

ø 330 mm	4,3 kg
ø 420 mm	4,9 kg
ø 620 mm	9,7 kg
ø 920 mm	16,0 kg
ø 1220 mm	22,2 kg

Optionales Zubehör für Pendemontage | Optional accessory | Accessoire optionnel

Pende starr | Rod suspension | Suspension rigide

weiß white blanc	1000 mm	F50-PEN-100-9016
silber silver argent	1000 mm	F50-PEN-100-9006
schwarz black noir	1000 mm	F50-PEN-100-9005
weiß white blanc	2000 mm	F50-PEN-200-9016
silber silver argent	2000 mm	F50-PEN-200-9006
schwarz black noir	2000 mm	F50-PEN-200-9005

Optionales Zubehör | Optional accessory | Accessoire optionnel

Kaschierung Indirektseite 920 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect

weiß white blanc	F50-KAS-092-9016
silber silver argent	F50-KAS-092-9006
schwarz black noir	F50-KAS-092-9005

Kaschierung Indirektseite 1220 mm | Cover Plate, Indirect Side | Plaque de recouvrement côté indirect


weiß white blanc	F50-KAS-122-9016
silber silver argent	F50-KAS-122-9006
schwarz black noir	F50-KAS-122-9005

in use ...

lilibet





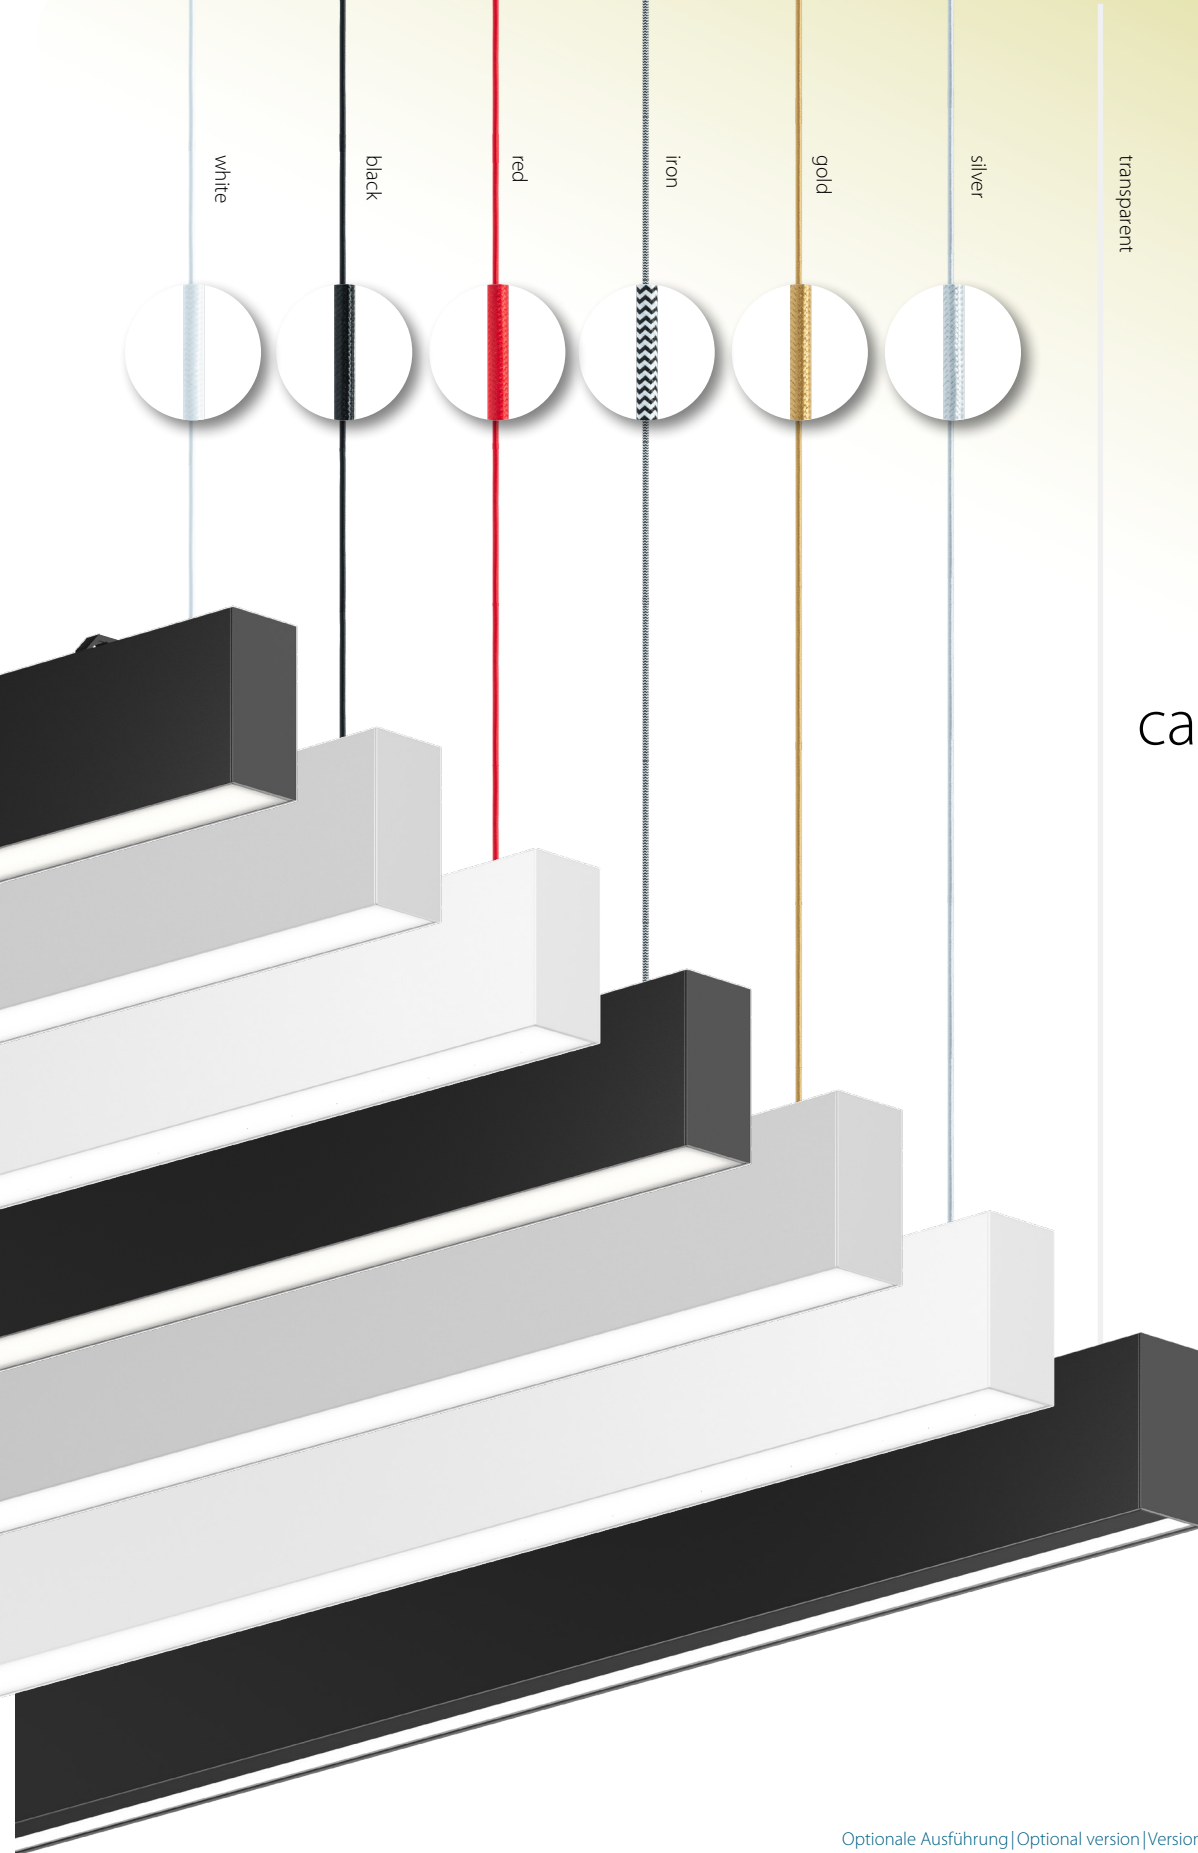

cable colours

Optionale Ausführung | Optional version | Version optionnelle

Einspeiskabel
Suspension cable
Alimentation cable
Cavo di alimentazione

2500 mm
 5 x 0,75 mm²

▷ white	T65-EIN-WHITE
▶ black	T65-EIN-BLACK
◀ red	T65-EIN-RED
▷ iron	T65-EIN-IRON
▶ gold	T65-EIN-GOLD
▷ silver	T65-EIN-SILVER

Transparent cable incl. (standard version)

housing colours

Auswahl der beliebtesten RAL-Farben aus unserem Leuchtsortiment.
A selection of the most popular colours of our range of luminaires.
Sélection des couleurs RAL les plus demandées pour notre gamme de luminaires.
Selezione dei colori RAL più richiesti per la nostra gamma di apparecchio.

STANDARD

RAL 9005

RAL 9016





Headquarters & Production

6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com, www.planlicht.com

