




anto+



*Like jewellery
in lighting design.*

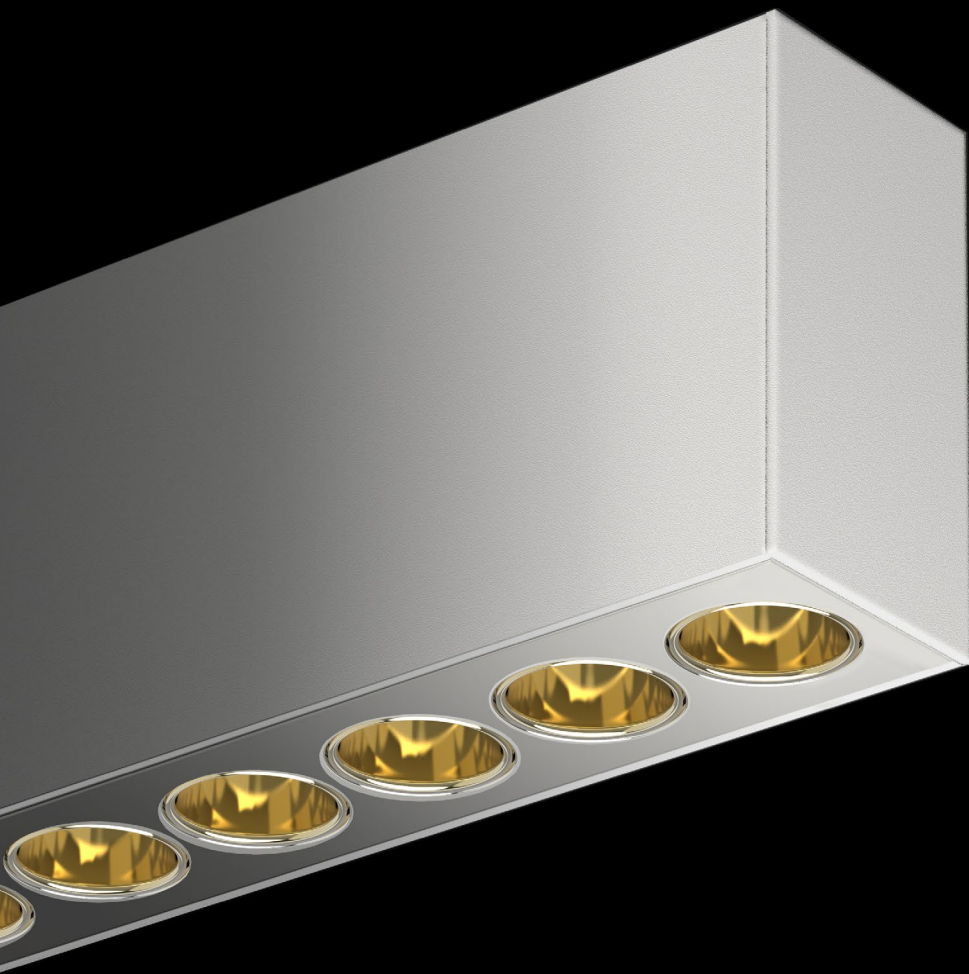

ICONIC LENS TUBE & MASK

Choose from different metallic colors and create your unique master piece



UGR<16

Sophisticated lens technology provides glare-free eye-comfort



DIFFERENT LENSES

Different beam angles and oval shapes to illuminate floors and walls



CRI>90

The color rendering index of this luminaire provides natural colors

EASY MOUNTING

Recessed versions can be easily installed with mounting brackets

INSETS

ANTO+ downlight is also available for PURE3 and PFORTY profile systems


DYNAMIC WHITE

Human centric lighting with tunable white from 2,700 to 6,500 Kelvin


INDIVIDUAL COLOURS

Housing, insets and power cables are available in different colors.


5 DIFFERENT SIZES & VARIOUS PROFILE INSETS

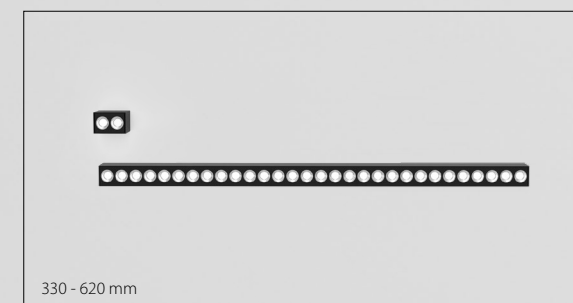


25 MIO. HOUSING AND CABLE COLOUR COMBINATIONS

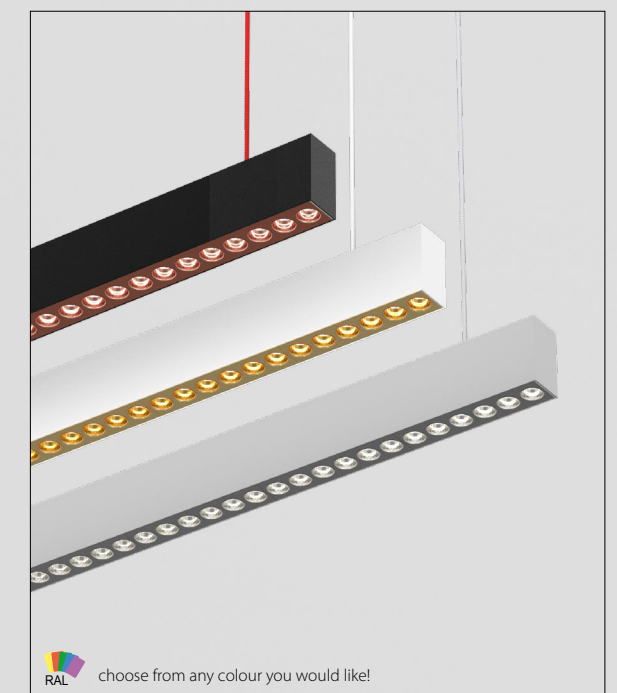

DIFFERENT MOUNTING TYPES

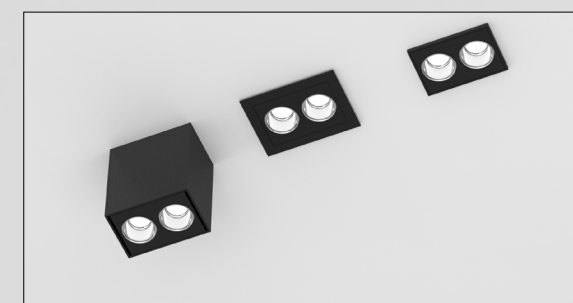

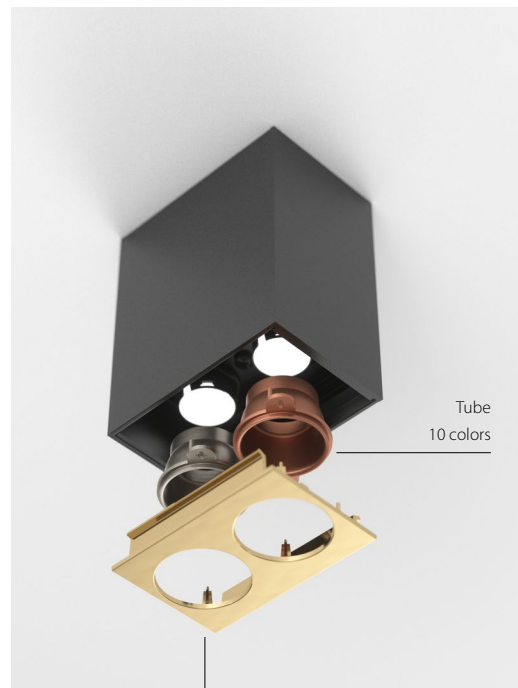

Tube
10 colors

Mask
10 colors

DAS DOWNLIGHT JUWEL

Ikonischer Linsentubus & Maske
Blendfrei (UGR <16)
Verschiedene Linsen
Natürliche Farbwiedergabe (CRI >90)
Einfache Installation
Inserts für Profilsysteme
Dynamisches Weiß (2.700 - 6.500 K)
Individuelle Farben

LE RAVISSANT DOWNLIGHT

Tube de lentille emblématique et masque
Sans éblouissement (UGR < 16)
Différentes lentilles
Rendu naturel des couleurs (IRC > 90)
Installation facile
Inserts pour systèmes de profilé
Blanc dynamique (2700 - 6500 K)
Couleurs individuelles

IL DOWNLIGHT GIOIELLO

Tubo della lente iconico e maschera
Antiabbagliamento (UGR < 16)
Diversi tipi di lenti
Resa cromatica naturale (CRI > 90)
Installazione semplice
Inset per sistemi di profili
Bianco dinamico (2700 - 6500 K)
Colori personalizzati



ANTO+




black 9005




white 9016



gunnery grey




black chrome matte




glaring gold




high-gloss gold




capital copper



high-gloss copper




silver matte



high-gloss silver

anto+

Aufbauleuchte
Surface-mount luminaire
Luminaire en saillie
Apparecchio a plafone

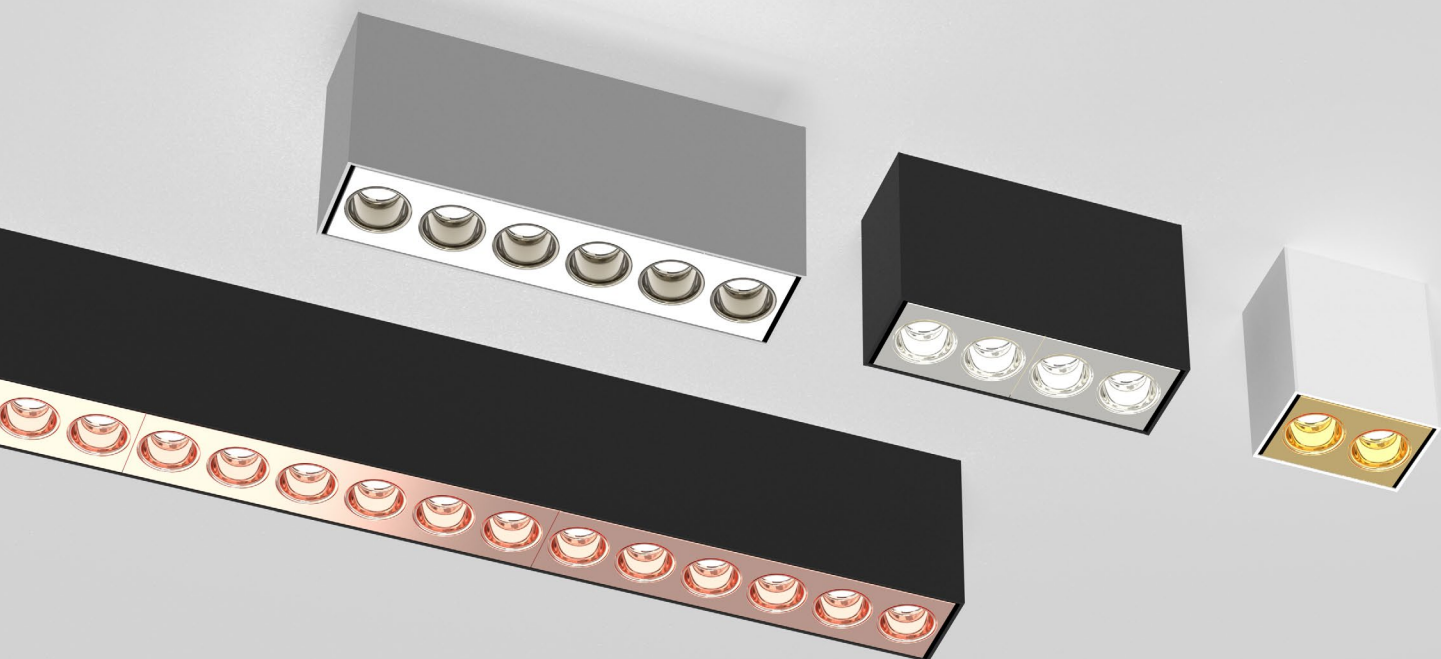

1 SIZE

2 spots - 67 mm
4 spots - 127 mm
6 spots - 187 mm
8 spots - 247 mm
12 spots - 367 mm
18 spots - 547 mm

2 LENS TUBE COLOUR

p. 16

006	high-gloss silver	B	black (RAL 9005)	N
012	silver matte	P	glaring gold	D
018	high-gloss gold	G	capital copper	R
024	high-gloss copper	K	gunnery grey	Y
036	white (RAL 9016)	W	black chrome matte	C
054				

3 MASK COLOUR

p. 16

high-gloss silver	B	black (RAL 9005)	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital copper	R
high-gloss copper	K	gunnery grey	Y
white (RAL 9016) *	W	black chrome matte	C
UGR > 19			

4 HOUSING COLOUR

silver
white
black
RAL of your choice (p. 19)

5 LED

SI

WS

SW

☞

2700 K, CRI > 90	927
3000 K, CRI > 90	930
4000 K, CRI > 90	940
2700-6500 K, dynamic white, CRI > 90	HCL

6 OUTPUT



medium output



dynamic white

M

X

7 DIM

non-dim
DALI, dynamic white

1

3

8 BEAM ANGLE



15°



30°



45°



asymmetric / oval

1

3

4

A


S44A 1-2 3 4 C1 5 6 7 8

CONFIGURE ONLINE


S44A024-KYWSC1HCLX3A Surface-mount, 8 spots, lens tube high-gloss cooper, mask gunnery grey, housing white, asymmetric, dynamic white (order sample)

katalog.planlicht.com


ANTO+




15°




30°



45°



asymmetric / oval



LUMINOUS FLUX (LM) ANTO+ / LENS TUBE SILVER MATTE

	2700 K CRI > 90				3000 K CRI > 90				4000 K output CRI > 90				dynamic white CRI > 90			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
2 spots	241 lm	220 lm	184 lm	193 lm	246 lm	224 lm	188 lm	197 lm	256 lm	234 lm	196 lm	205 lm				
4 spots	478 lm	435 lm	365 lm	382 lm	487 lm	444 lm	372 lm	390 lm	507 lm	463 lm	389 lm	406 lm				
6 spots	737 lm	672 lm	564 lm	590 lm	752 lm	685 lm	575 lm	602 lm	783 lm	714 lm	600 lm	627 lm				
8 spots	990 lm	901 lm	756 lm	791 lm	1008 lm	919 lm	770 lm	807 lm	1050 lm	958 lm	805 lm	840 lm				
12 spots	1526 lm	1391 lm	1167 lm	1221 lm	1557 lm	1418 lm	1190 lm	1246 lm	1621 lm	1478 lm	1242 lm	1298 lm				
18 spots	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1881 lm	1128 lm	1028 lm	863 lm	903 lm

SYSTEM POWER (W)

	dyn. white		
2 spots	4,1 W		270 g
4 spots	7,7 W		390 g
6 spots	10 W		520 g
8 spots	14 W		680 g
12 spots	19 W		950 g
18 spots	29 W	17 W	1310 g


VARIATIONS ANTO+ SURFACE-MOUNT

	MEDIUM OUTPUT		DYNAMIC WHITE
	non-dim	DALI	
2 spots	●	-	-
4 spots	●	-	-
6 spots	●	-	-
8 spots	●	●	-
12 spots	●	●	-
18 spots	●	●	●

● YES

- NO

3 MASK COLOUR

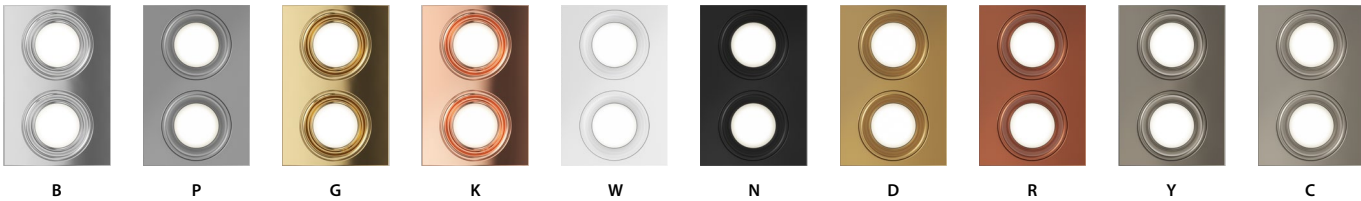

COMPARE LENS TUBES ANTO+ / SURFACE-MOUNTED 18 SPOTS

lens tube	2700 K				3000 K				4000 K				dynamic white *			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
silver matte	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1181 lm	1128 lm	1028 lm	863 lm	903 lm
high-gloss silver	2364 lm	2169 lm	1986 lm	2124 lm	2412 lm	2211 lm	2025 lm	2166 lm	2511 lm	2307 lm	2112 lm	2303 lm	1206 lm	1106 lm	1013 lm	1083 lm
white 9016	2307 lm	2124 lm	1848 lm	1944 lm	2352 lm	2166 lm	1884 lm	1983 lm	2451 lm	2256 lm	1965 lm	2150 lm	1177 lm	1083 lm	943 lm	991 lm
black 9005	2118 lm	1920 lm	1497 lm	1494 lm	2160 lm	1959 lm	1527 lm	1524 lm	2250 lm	2040 lm	1590 lm	1587 lm	1080 lm	979 lm	763 lm	762 lm
high-gloss gold	2349 lm	2154 lm	1983 lm	2121 lm	2397 lm	2196 lm	2022 lm	2163 lm	2496 lm	2289 lm	2109 lm	2277 lm	1198 lm	1097 lm	1011 lm	1082 lm
high gloss copper	2325 lm	2145 lm	1983 lm	2067 lm	2373 lm	2187 lm	2022 lm	2109 lm	2472 lm	2280 lm	2106 lm	2213 lm	1186 lm	1094 lm	1011 lm	1054 lm
glaring gold	2172 lm	1971 lm	1584 lm	1644 lm	2214 lm	2010 lm	1617 lm	1677 lm	2310 lm	2094 lm	1683 lm	1746 lm	1108 lm	1005 lm	808 lm	838 lm
capital copper	2151 lm	1944 lm	1512 lm	1566 lm	2193 lm	1983 lm	1542 lm	1596 lm	2286 lm	2067 lm	1608 lm	1665 lm	1097 lm	991 lm	771 lm	799 lm
gunnery grey	2202 lm	1980 lm	1590 lm	1650 lm	2247 lm	2019 lm	1623 lm	1683 lm	2340 lm	2106 lm	1689 lm	1755 lm	1123 lm	1010 lm	811 lm	842 lm
black chrome matte	2244 lm	2043 lm	1716 lm	1803 lm	2289 lm	2085 lm	1749 lm	1839 lm	2385 lm	2172 lm	1824 lm	1914 lm	1144 lm	1042 lm	875 lm	920 lm

* dynamic white lumens = 2700 K, Lumens 6500 K ca. +11%



230V | UGR < 16 | up to L80/50.000 h | up to 91 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | MacAdam 3 | DALI switchDIM



COMPARE LENS TUBES ANTO+ / RECESSED 8 SPOTS / HIGH OUTPUT DALI, DYNAMIC WHITE

lens tube	2700 K				3000 K				4000 K				dynamic white*			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
silver matte	1357 lm	1266 lm	1066 lm	1115 lm	1384 lm	1292 lm	1088 lm	1137 lm	1442 lm	1346 lm	1133 lm	1184 lm	658 lm	612 lm	526 lm	530 lm
high-gloss silver	1428 lm	1347 lm	1240 lm	1327 lm	1457 lm	1375 lm	1265 lm	1354 lm	1518 lm	1432 lm	1317 lm	1409 lm	693 lm	674 lm	613 lm	623 lm
white 9016	1392 lm	1313 lm	1141 lm	1201 lm	1421 lm	1340 lm	1164 lm	1225 lm	1480 lm	1396 lm	1212 lm	1275 lm	679 lm	656 lm	570 lm	573 lm
black 9005	1271 lm	1179 lm	918 lm	916 lm	1297 lm	1203 lm	936 lm	934 lm	1351 lm	1253 lm	974 lm	972 lm	623 lm	574 lm	447 lm	442 lm
high-gloss gold	1428 lm	1347 lm	1240 lm	1327 lm	1457 lm	1375 lm	1265 lm	1354 lm	1518 lm	1432 lm	1317 lm	1409 lm	693 lm	662 lm	612 lm	623 lm
high gloss copper	1392 lm	1313 lm	1215 lm	1267 lm	1421 lm	1340 lm	1240 lm	1293 lm	1480 lm	1396 lm	1290 lm	1346 lm	679 lm	658 lm	600 lm	592 lm
glaring gold	1299 lm	1212 lm	973 lm	1009 lm	1326 lm	1237 lm	993 lm	1029 lm	1381 lm	1289 lm	1034 lm	1071 lm	633 lm	594 lm	484 lm	479 lm
capital copper	1299 lm	1212 lm	942 lm	975 lm	1326 lm	1237 lm	961 lm	995 lm	1381 lm	1289 lm	1001 lm	1036 lm	626 lm	582 lm	469 lm	467 lm
gunnery grey	1299 lm	1212 lm	973 lm	1009 lm	1326 lm	1237 lm	993 lm	1029 lm	1381 lm	1289 lm	1034 lm	1071 lm	633 lm	598 lm	484 lm	479 lm
black chrome matte	1357 lm	1266 lm	1066 lm	1115 lm	1384 lm	1292 lm	1088 lm	1137 lm	1442 lm	1346 lm	1133 lm	1184 lm	658 lm	626 lm	526 lm	530 lm

* dynamic white lumens = 2700 K, Lumens 6500 K ca. +11%

OPTIONAL ACCESSORY


S44-F-SET-MONT

anto+ De-/Montageset **frameless** (3 Teile)

anto+ Dis-/assembly kit **frameless** (3 parts)

anto+ Set de dé-/montage **sans cadre** (3 parties)


anto+ Kit di s-/montaggio **senza cornice** (3 parti)

CUT OUT/WEIGHT (g)					 X=10-40 mm			
	FRAME	↑ DALI	↑ non-dim	↑ HCL	FRAMELESS	↑ DALI	↑ non-dim	↑ HCL
2 spots	70x48,5 mm	X+160 mm/290 g	X+55 mm/180 g		73x52 mm	X+160 mm/340 g	X+70 mm/230 g	
4 spots	130x48,5 mm	X+90 mm/360 g	X+55 mm/260 g	X+191 mm/510 g	133x52 mm	X+90 mm/440 g	X+70 mm/340 g	X+191 mm/590 g
6 spots	190x48,5 mm	X+55 mm/470 g	X+55 mm/440 g	X+70 mm/590 g	193x52 mm	X+70 mm/570 g	X+70 mm/540 g	X+70 mm/690 g
8 spots	250x48,5 mm	X+55 mm/540 g	X+55 mm/520 g	X+70 mm/660 g	253x52 mm	X+70 mm/660 g	X+70 mm/640 g	X+70 mm/780 g
12 spots	370x48,5 mm	X+55 mm/700 g	X+55 mm/650 g	X+70 mm/800 g	373x52 mm	X+70 mm/860 g	X+70 mm/810 g	X+70 mm/960 g
18 spots	550x48,5 mm	X+70 mm/940 g	X+55 mm/840 g	X+70 mm/1030 g	553x52 mm	X+70 mm/1135 g	X+70 mm/1030 g	X+70 mm/1240 g



anto+ inset p.forty & pure 3

Downlight Inset p.forty & pure 3

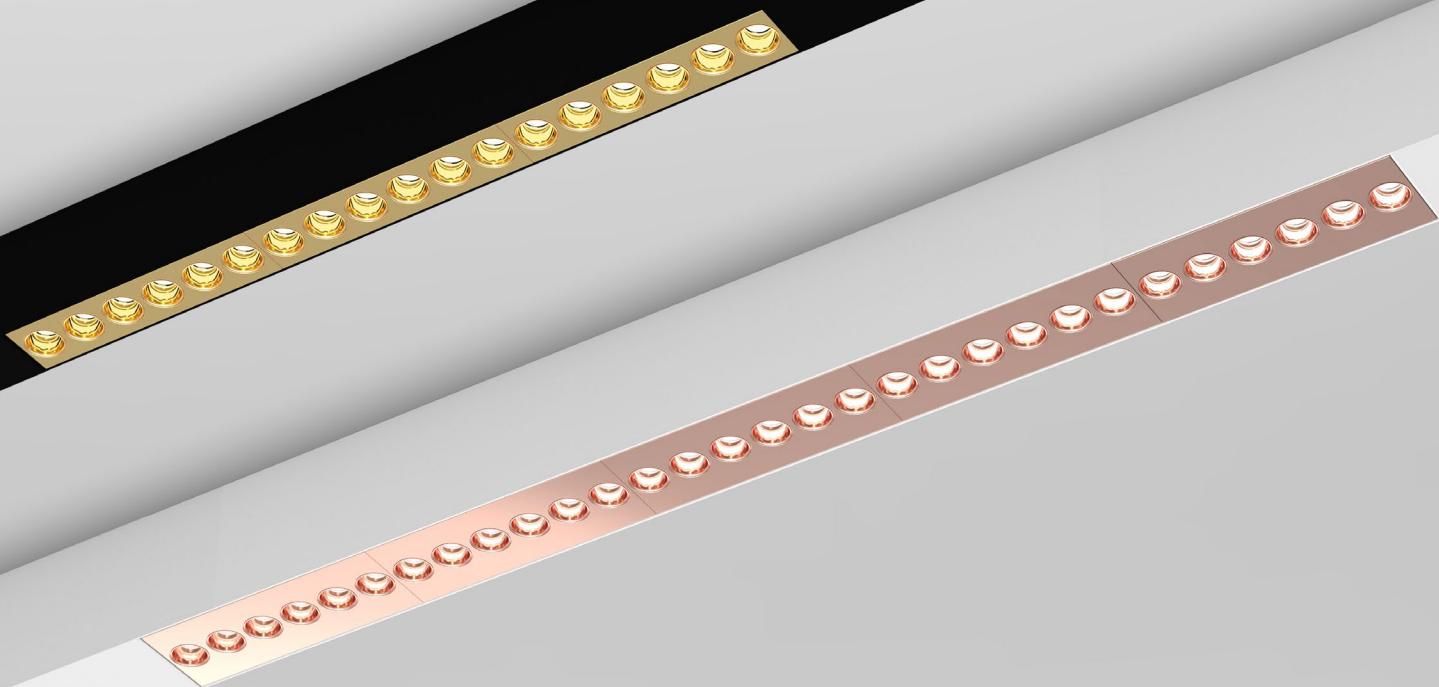

1 SPOTS

- 2 spots
- 4 spots
- 6 spots (2x 100 mm Blind Cover)
- 8 spots (2x 100 mm Blind Cover)
- 12 spots (2x 100 mm Blind Cover)
- 18 spots
- 30 spots

2 LENS TUBE COLOUR

p. 16

02	high-gloss silver	B	black (RAL 9005)	N
04	silver matte	P	glaring gold	D
06	high-gloss gold	G	capital cooper	R
08	high-gloss cooper	K	gunnery grey	Y
12	white (RAL 9016)*	W	black chrome matte	C
18	* Some Versions UGR < 19			
30				

3 MASK COLOUR

p. 16

high-gloss silver	B	black (RAL 9005)	N
silver matte	P	glaring gold	D
high-gloss gold	G	capital cooper	R
high-gloss cooper	K	gunnery grey	Y
white (RAL 9016)	W	black chrome matte	C

4 LED

- 2700 K, CRI > 90
- 3000 K, CRI > 90
- 4000 K, CRI > 90
- 2700 - 6500 K, dynamic white, CRI > 90

5 OUTPUT

- medium output
- dynamic white

6 DIM

- non-dim
- DALI, dynamic white

7 BEAM ANGLE

- 15°
- 30°
- 45°
- asymmetric



P-A 1-2-3-4-5-6-7

P-A18-PC940M14 Inset 18 spots, lens tube silver matte, mask black chrome matte, 4000 K, non-dim, beam angle 45° (order sample)

CONFIGURE ONLINE

katalog.planlicht.com

ANTO+ INSET P.FORTY & PURE 3

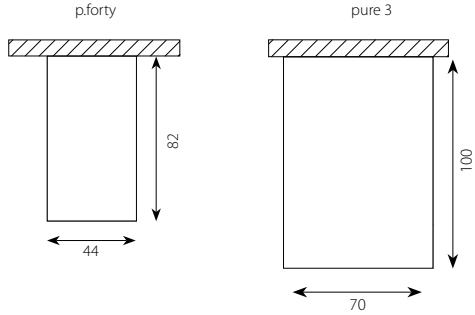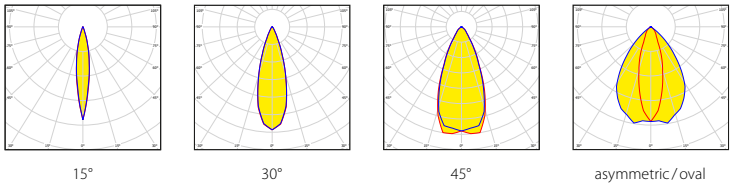

LUMINOUS FLUX (LM) / ANTO+ / LENS TUBE SILVER MATTE

	2700 K				3000 K				4000 K				dynamic white			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
2 spots	241 lm	220 lm	184 lm	193 lm	246 lm	224 lm	188 lm	197 lm	256 lm	234 lm	196 lm	205 lm				
4 spots	478 lm	435 lm	365 lm	382 lm	487 lm	444 lm	372 lm	390 lm	507 lm	463 lm	389 lm	406 lm				
6 spots	737 lm	672 lm	564 lm	590 lm	752 lm	685 lm	575 lm	602 lm	783 lm	714 lm	600 lm	627 lm				
8 spots	990 lm	901 lm	756 lm	791 lm	1008 lm	919 lm	770 lm	807 lm	1050 lm	958 lm	805 lm	840 lm				
12 spots	1526 lm	1391 lm	1167 lm	1221 lm	1557 lm	1418 lm	1190 lm	1246 lm	1621 lm	1478 lm	1242 lm	1298 lm	778 lm	709 lm	595 lm	623 lm
18 spots	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1181 lm	1128 lm	1028 lm	863 lm	903 lm
30 spots	3471 lm	3165 lm	2656 lm	2779 lm	3542 lm	3226 lm	2708 lm	2835 lm	3688 lm	3363 lm	2826 lm	2953 lm	1770 lm	1614 lm	1355 lm	1417 lm

SYSTEM POWER (W) / WEIGHT




	non dim		dyn. white		Inset p.forty		Inset pure 3	
	DALI				non-dim	DALI/HCL	non-dim	DALI/HCL
2 spots	4,1 W				0,1 kg		0,1 kg	
4 spots	7,7 W				0,1 kg		0,1 kg	
6 spots	10 W				0,3 kg	0,4 kg	0,3 kg	0,4 kg
8 spots	14 W				0,5 kg	0,5 kg	0,5 kg	0,5 kg
12 spots	19 W	11 W			0,5 kg	0,6 kg	0,6 kg	0,6 kg
18 spots	29 W	17 W			0,6 kg	0,6 kg	0,6 kg	0,7 kg
30 spots	47 W	27 W			1,0 kg	1,0 kg	1,0 kg	1,0 kg

VARIATIONS ANTO+ INSETS

	MEDIUM OUTPUT		DYNAMIC WHITE
	non-dim	DALI	
2 spots			
4 spots			
6 spots			
8 spots			
12 spots			
18 spots			
30 spots			

- YES
- NO
- YES, BLANK COVERS

PROFILE VIEW



230V | up to L80 / 50.000 h | IEC 62471: Blue light hazard: RG ≤ 1 | MacAdam 3 | DALI switchDIM

ANTO+ INSET P.FORTY & PURE 3

COMPARE LENS TUBES / ANTO+ INSET 18 SPOTS

lens tube	2700 K				3000 K				4000 K				dynamic white			
	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.	15°	30°	45°	asym.
silver matte	2211 lm	2016 lm	1692 lm	1770 lm	2256 lm	2055 lm	1725 lm	1806 lm	2349 lm	2142 lm	1800 lm	1881 lm	1128 lm	1028 lm	863 lm	903 lm
high-gloss silver	2364 lm	2169 lm	1986 lm	2124 lm	2412 lm	2211 lm	2025 lm	2166 lm	2511 lm	2307 lm	2112 lm	2303 lm	1206 lm	1106 lm	1013 lm	1083 lm
white 9016	2307 lm	2124 lm	1848 lm	1944 lm	2352 lm	2166 lm	1884 lm	1983 lm	2451 lm	2256 lm	1965 lm	2150 lm	1177 lm	1083 lm	943 lm	991 lm
black 9005	2118 lm	1920 lm	1497 lm	1494 lm	2160 lm	1959 lm	1527 lm	1524 lm	2250 lm	2040 lm	1590 lm	1587 lm	1080 lm	979 lm	763 lm	762 lm
high-gloss gold	2349 lm	2154 lm	1983 lm	2121 lm	2397 lm	2196 lm	2022 lm	2163 lm	2496 lm	2289 lm	2109 lm	2277 lm	1198 lm	1097 lm	1011 lm	1082 lm
high gloss copper	2325 lm	2145 lm	1983 lm	2067 lm	2373 lm	2187 lm	2022 lm	2109 lm	2472 lm	2280 lm	2106 lm	2213 lm	1186 lm	1094 lm	1011 lm	1054 lm
glaring gold	2172 lm	1971 lm	1584 lm	1644 lm	2214 lm	2010 lm	1617 lm	1677 lm	2310 lm	2094 lm	1683 lm	1746 lm	1108 lm	1005 lm	808 lm	838 lm
capital copper	2151 lm	1944 lm	1512 lm	1566 lm	2193 lm	1983 lm	1542 lm	1596 lm	2286 lm	2067 lm	1608 lm	1665 lm	1097 lm	991 lm	771 lm	799 lm
gunnery grey	2202 lm	1980 lm	1590 lm	1650 lm	2247 lm	2019 lm	1623 lm	1683 lm	2340 lm	2106 lm	1689 lm	1755 lm	1123 lm	1010 lm	811 lm	842 lm
black chrome matte	2244 lm	2043 lm	1716 lm	1803 lm	2289 lm	2085 lm	1749 lm	1839 lm	2385 lm	2172 lm	1824 lm	1914 lm	1144 lm	1042 lm	875 lm	920 lm




Nobelstyle Graz, Foto: Alexander Künzel



Nobelstyle Graz, Foto: Alexander Künzel

LOUVRE & LENS TUBE COLOURS

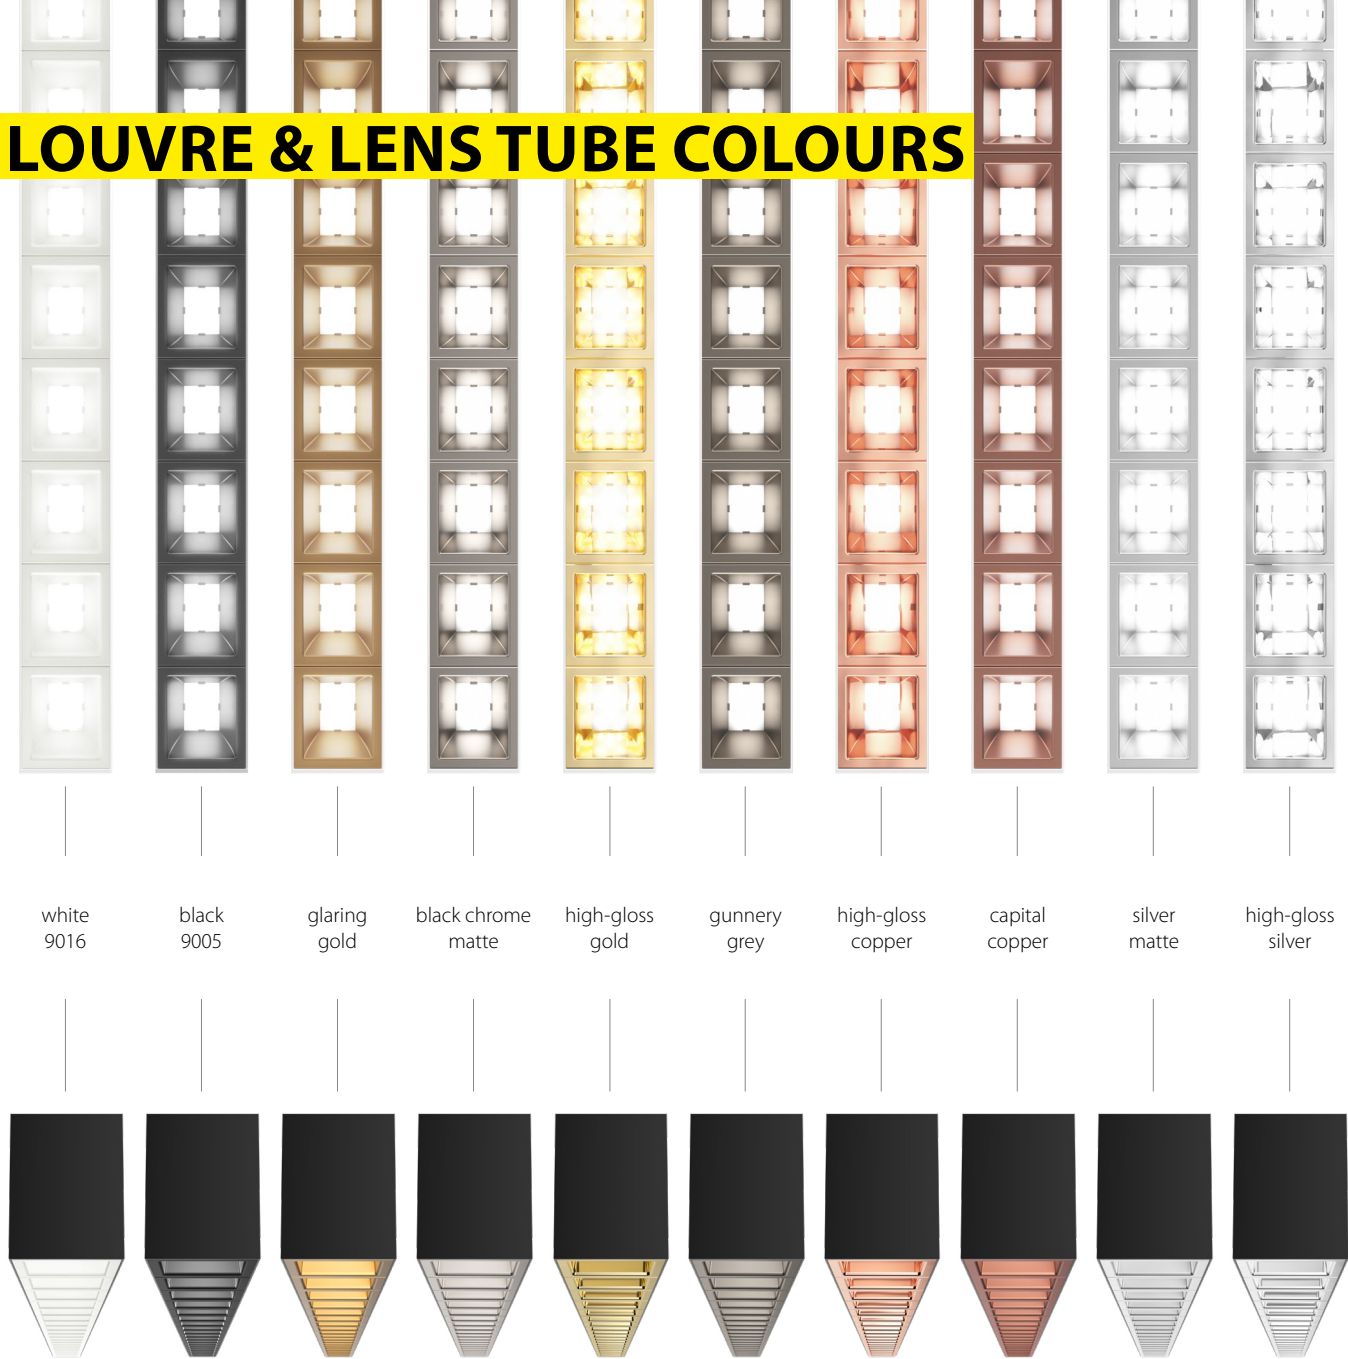


GOOD to know

Rectangular quiet luminaires can also be ordered in customized sizes.
On request also versions with pure 3 or p.forty are possible.

ABSORBER COLOURS

ORGANOID®

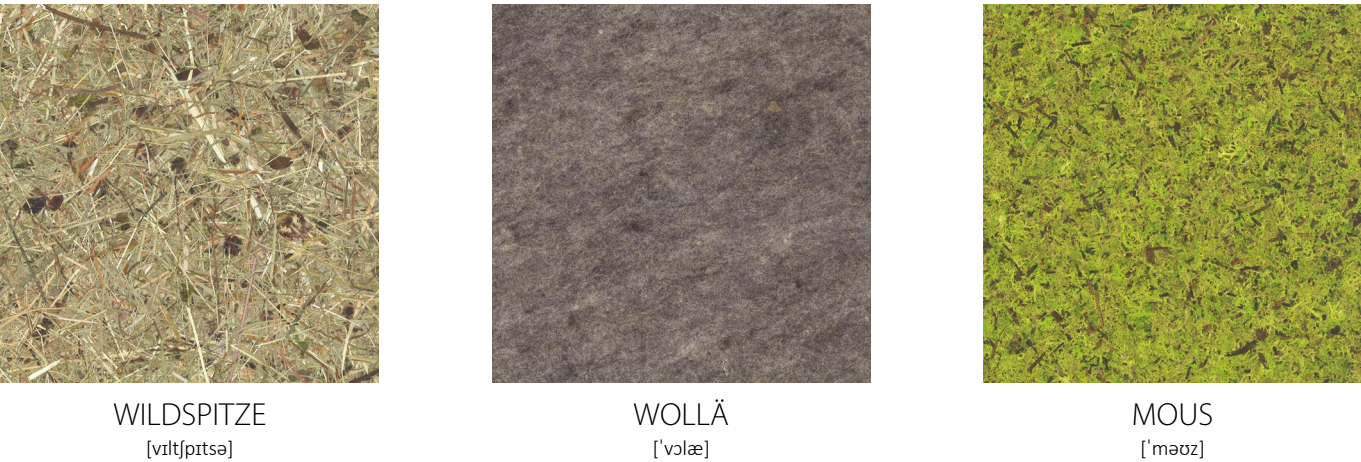

FELT.QUIET


STANDARD



EXTRA +



7 CABLE COLOURS

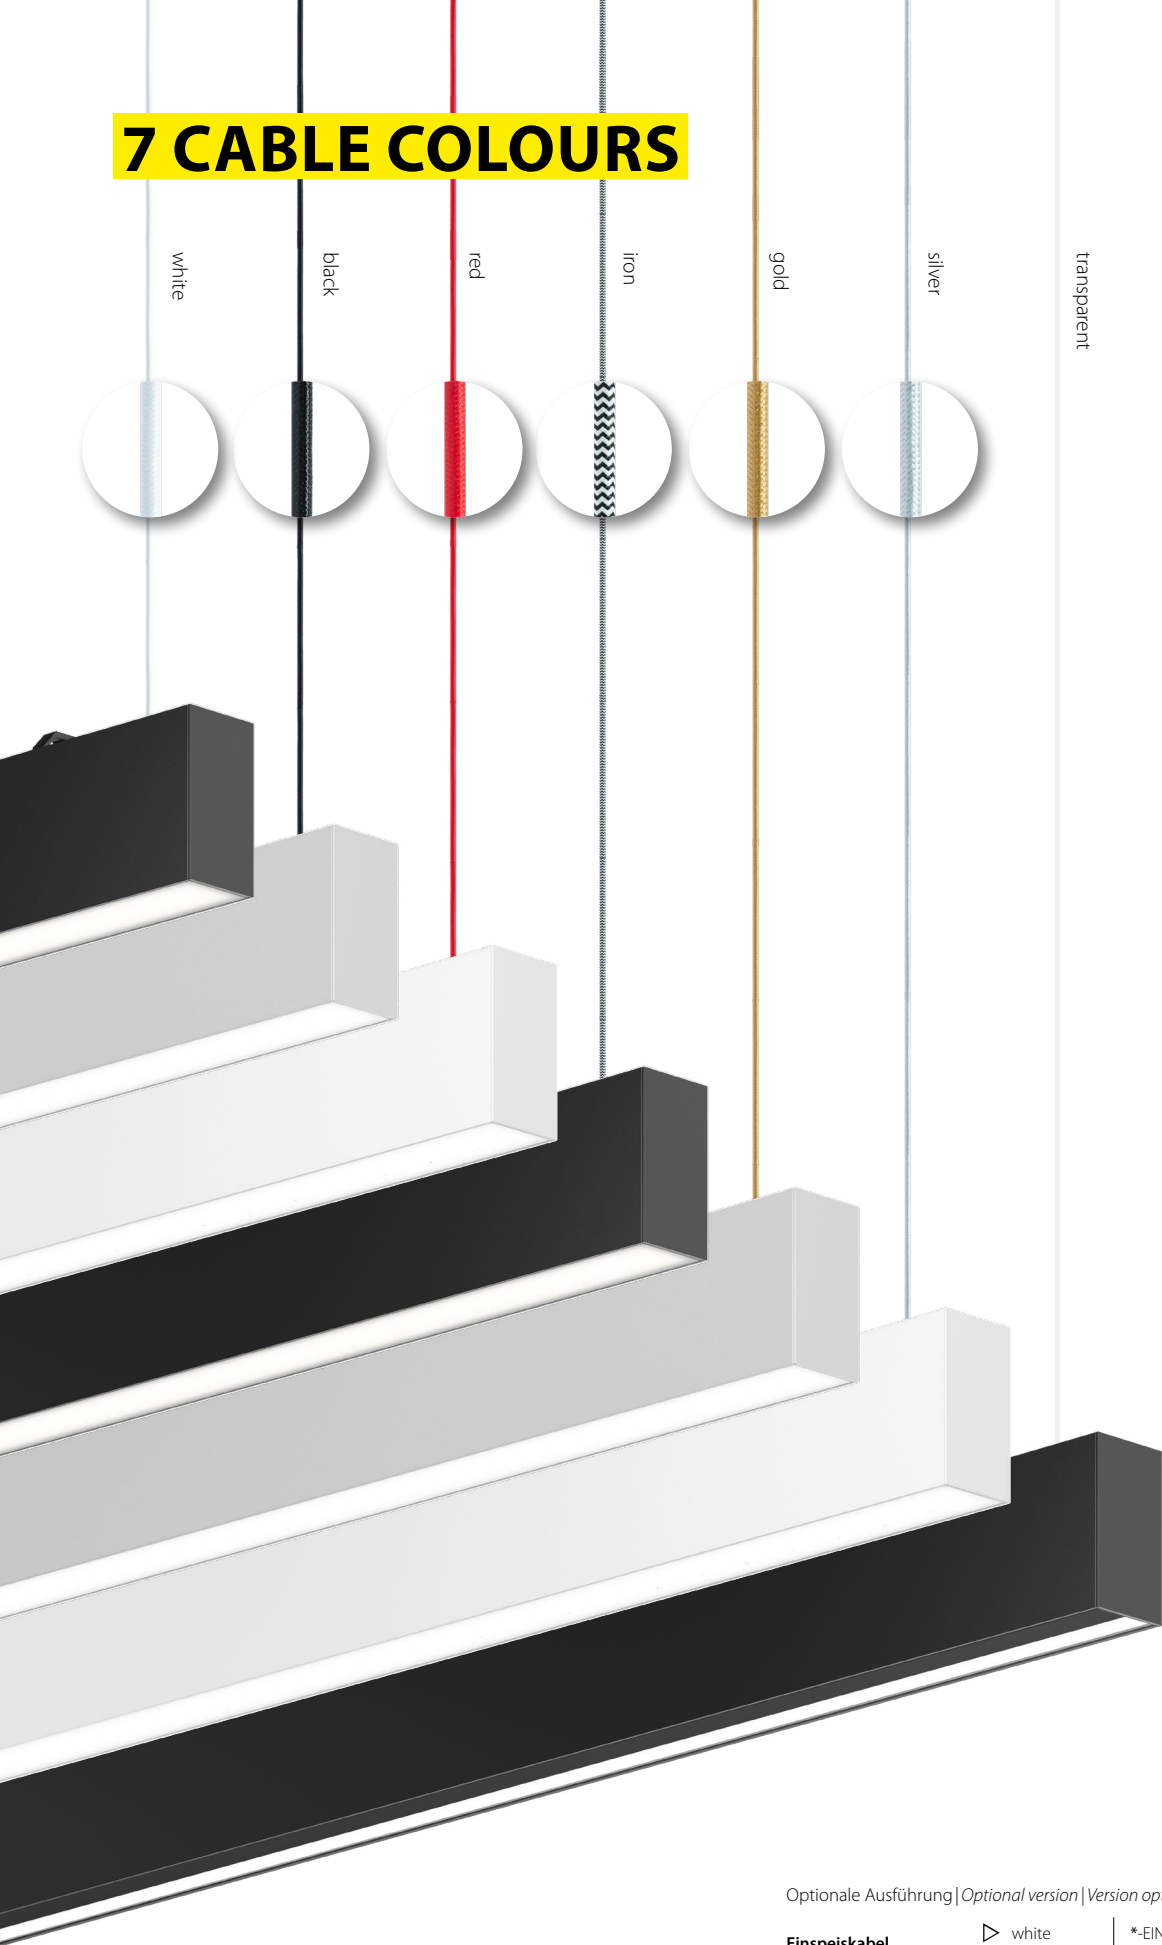

Optionale Ausführung | Optional version | Version optionnelle | Versione opzionale

Einspeiskabel
Suspension cable
Câble d'alimentation
Cavo di alimentazione

1750 mm
5 x 0,75 mm²

▷ white	*-EIN-WHITE
▷ black	*-EIN-BLACK
▷ red	*-EIN-RED
▷ iron	*-EIN-IRON
▷ gold	*-EIN-GOLD
▷ silver	*-EIN-SILVER



Transparent cable incl. (standard version)

for special requests

90 HOUSING COLOURS



