




skai

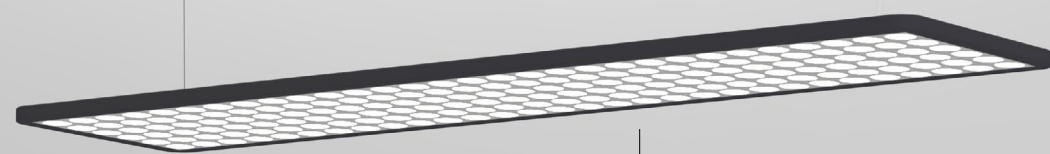

suspended  
p. 10

Flat design.  
Power machine.



#### UNIQUE LENS TECHNOLOGY

Up to 160 lenses provide an ideal mix of directional light diffuse light



#### UGR<16

Glare free eye comfort for every workspace



#### INTEGRATED DRIVER

Luminaire comes with minimalistic baldachin thanks to smart design



#### INTEGRATED FEED-INS

Suspension cable can be integrated within the power cable.

#### DIRECT / INDIRECT LIGHTING

Light up the room with optional indirect lighting



#### DYNAMIC WHITE

Human centric lighting with tunable white from 2,700 to 6,500 Kelvin



#### CABLE

Available with transparent power cable or one of 6 textile cables




#### INDIVIDUAL COLOURS

Housing, insets and power cables are available in different colors



#### ULTRA SLIM DESIGN

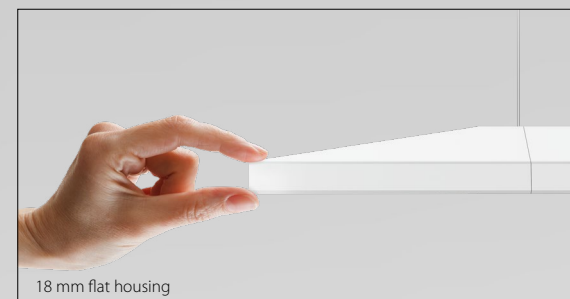


18 mm flat housing

#### THE DESIGNER




Kai Stania

#### THOUSANDS OF HOUSING AND CABLE COLOUR COMBINATIONS

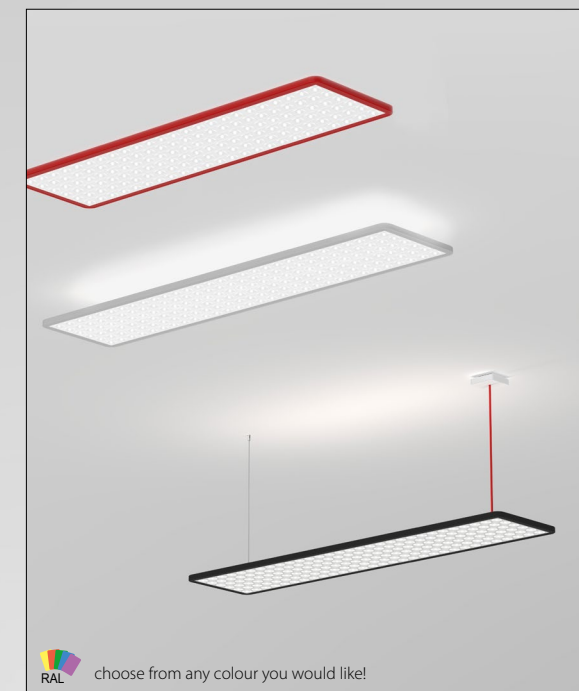

RAL

choose from any colour you would like!







**DIE LICHTMASCHINE  
IM FLACHEN DESIGN.**  
Einzigartige Linsen-Technologie  
Blendfrei (UGR <16)  
Integriertes Vorschaltgerät  
Kabelintegrierte Seilabhängung  
Direkt / Indirekte Beleuchtung  
Dynamisches Weiß (2.700 - 6.500 K)  
Individuelle Kabelfarben  
Individuelle Gehäusefarben

**LE LUMINAIRE  
AU DESIGN PLAT.**  
*Technologie de lentilles exceptionnelle  
Sans éblouissement (UGR < 16)  
Ballast intégré  
Câble de suspension intégré au câble  
électrique  
Éclairage direct / indirect  
Blanc dynamique (2700 - 6500 K)  
Couleurs de câble individuelles  
Couleurs de corps individuelles*

**DISPOSITIVO DI ILLUMINAZIONE  
CON DESIGN PIANO.**  
*Lenti con tecnologia unica nel loro  
genere  
Antiabbagliamento (UGR < 16)  
Reattore integrato  
Sospensione a fune integrata nel cavo  
Luce diretta / indiretta  
Bianco dinamico (2700 - 6500 K)  
Colori del cavo personalizzati  
Colori dell'alloggiamento  
personalizzati*










Inspiration

skai



Aufbauleuchte  
Surface-mount luminaire  
Luminaires en saillie  
A superficie

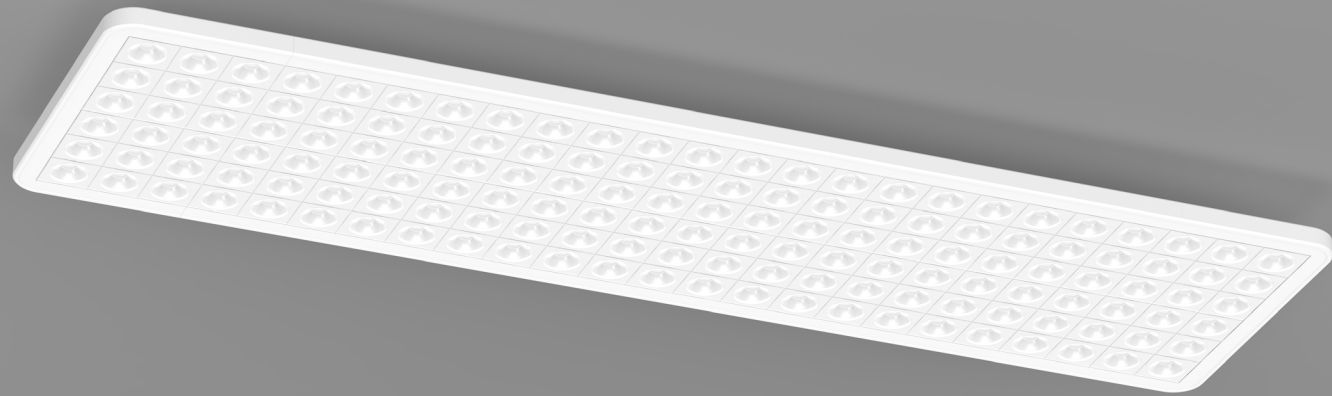**SKAI**

direct



direct/indirect

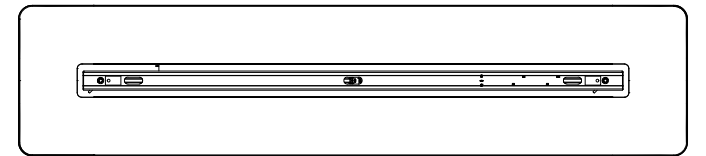

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

| direct          |                 |                        |                 | direct/indirect |                        |            |  |
|-----------------|-----------------|------------------------|-----------------|-----------------|------------------------|------------|-------------------------------------------------------------------------------------|
| 3000 K CRI > 90 | 4000 K CRI > 90 | dynamic white CRI > 80 | 3000 K CRI > 90 | 4000 K CRI > 90 | dynamic white CRI > 80 |            |                                                                                     |
| 1186mm          | 2936lm/30W      | 3274lm/30W             | 3493lm/30W      | 4012lm/51W      | 4467lm/51W             | 4770lm/51W | 8,4 kg                                                                              |
| 1471 mm         | 3563 lm/37W     | 3974lm/37W             | 4367lm/38W      | 4669lm/56W      | 5178lm/56W             | 5650lm/58W | 9,7 kg                                                                              |

### ACCESSORIES - DECOCRITIVE FRAME

**T11-1-2-SW**

### 1 OUTPUT

## 2 SIZE

|                                                                                       |                      |              |         |            |
|---------------------------------------------------------------------------------------|----------------------|--------------|---------|------------|
|  | non-dim DALI         | <b>ZRA</b>   | 1186 mm | <b>118</b> |
|  | Sensor DALI          | <b>ZRASD</b> | 1471 mm | <b>147</b> |
|  | Sensor dynamic white | <b>ZRASH</b> |         |            |

## ACCESSORIES - SENSOR DALI

|                        |                              |
|------------------------|------------------------------|
| <b>54P913700359103</b> | Extended IR Programming Tool |
| <b>54P913700392403</b> | IR Remote Control            |

### 1 SIZE

|         |            |
|---------|------------|
| 1186 mm | <b>118</b> |
| 1471 mm | <b>147</b> |

## 2 COLOUR

|                                                                                     |                            |                                                                                     |
|-------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|
|  | silver                     | 9006                                                                                |
|  | white                      | 9016                                                                                |
|  | black                      | 9005                                                                                |
|  | RAL of your choice (p. 13) |  |

### 3 DIRECT / INDIRECT

|                                                                                       |                   |          |
|---------------------------------------------------------------------------------------|-------------------|----------|
|  | direct            | <b>1</b> |
|  | direct / indirect | <b>2</b> |

**4 LED**

- 3000 K, CRI > 90
- 4000 K, CRI > 90
- 2700 - 6500 K, dynamic white, CRI > 80

### 5 CONTROL

|                                                                                     |                                 |          |
|-------------------------------------------------------------------------------------|---------------------------------|----------|
|  | non-dim                         | <b>1</b> |
|  | DALI                            | <b>3</b> |
|  | Sensor (direct / indirect only) | <b>7</b> |

T11A**1**-**2**C**3****4**X**5**L

|                      |                                                               |
|----------------------|---------------------------------------------------------------|
| T11A118-9016C2940X3L | 1186 mm, white, direct/indirect, 4000 K, DALI, (order sample) |
|----------------------|---------------------------------------------------------------|


**● CONFIGURE ONLINE**

katalog.planlicht.com



230V | UGR < 16 | up to L90/50.000 h | up to 115 lm/W | IEC 62471: Blue light hazard: RG 0 | MacAdam 3 | DALI switchDIM



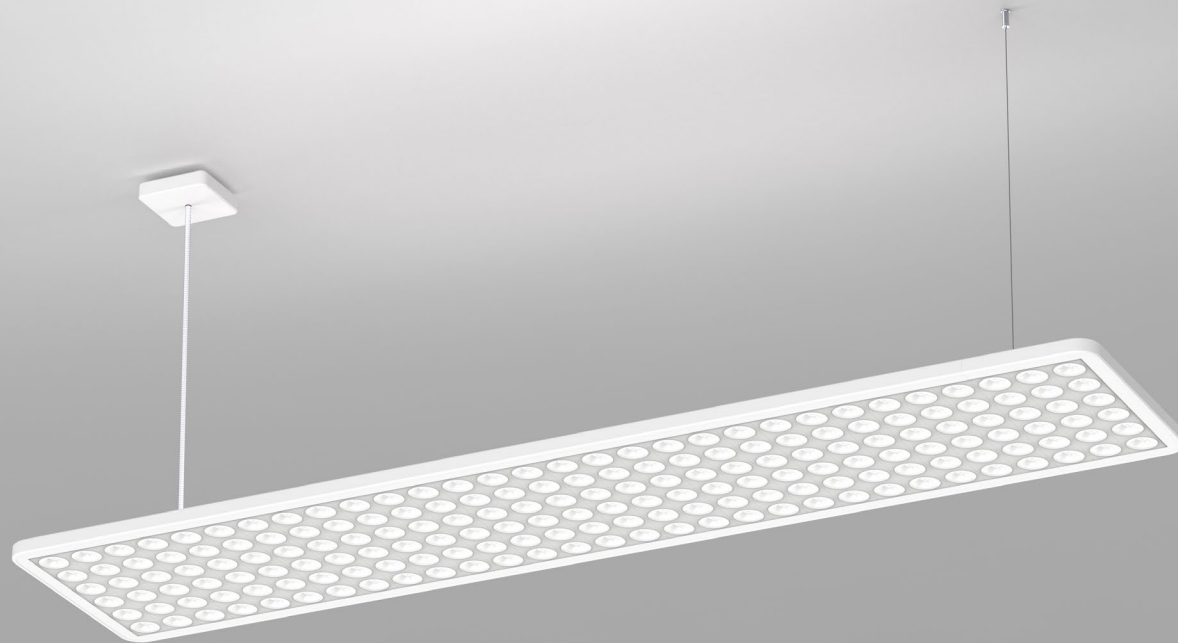

### 1 SIZE

1186 mm  
1471 mm

## 2 COLOUR

|     |                                                                                     |                            |                                                                                     |
|-----|-------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|
| 118 |  | silver                     | 9006                                                                                |
| 147 |  | white                      | 9016                                                                                |
|     |  | black                      | 9005                                                                                |
|     |  | RAL of your choice (p. 13) |  |

### 3 DIRECT / INDIRECT

|                                                                                       |                 |          |
|---------------------------------------------------------------------------------------|-----------------|----------|
|  | direct          | <b>1</b> |
|  | direct/indirect | <b>2</b> |

**4 LED**

|                                                                                     |                                        |            |                                                                                     |                                 |          |
|-------------------------------------------------------------------------------------|----------------------------------------|------------|-------------------------------------------------------------------------------------|---------------------------------|----------|
|  | 3000 K, CRI > 90                       | <b>930</b> |  | non-dim                         | <b>1</b> |
|  | 4000 K, CRI > 90                       | <b>940</b> |  | DALI                            | <b>3</b> |
|  | 2700 - 6500 K, dynamic white, CRI > 80 | <b>HCL</b> |  | Sensor (direct / indirect only) | <b>7</b> |

## 5 OUTPUT/CONTROL



|                                                                                     |                                 |          |
|-------------------------------------------------------------------------------------|---------------------------------|----------|
|  | non-dim                         | <b>1</b> |
|  | DALI                            | <b>3</b> |
|  | Sensor (direct / indirect only) | <b>7</b> |

T11H**①**-**②**C**③****④**X**⑤**L

T11H118-9016C2840X3L 1186 mm, white, direct / indirect, 4000 K, DALI, (order sample)

**● CONFIGURE ONLINE**

[katalog.planlicht.com](http://katalog.planlicht.com)

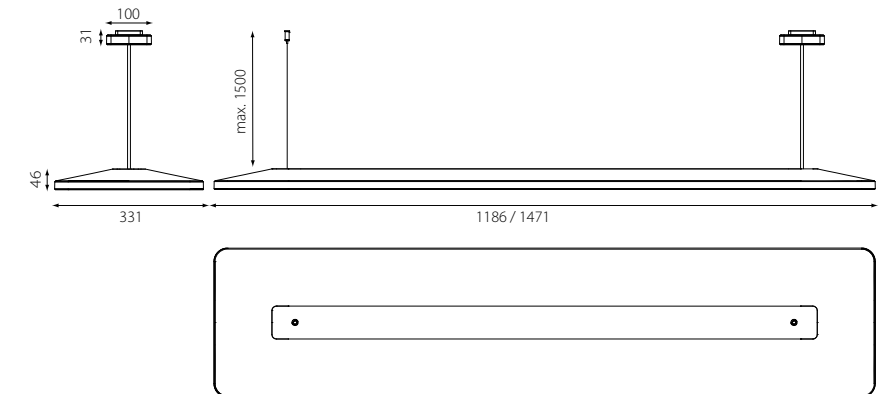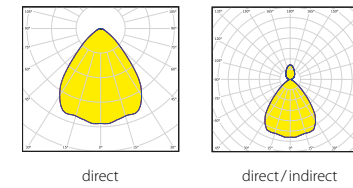

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

| direct  |              |               |             | direct/indirect |               |              |  |
|---------|--------------|---------------|-------------|-----------------|---------------|--------------|-------------------------------------------------------------------------------------|
| 3000 K  | 4000 K       | dynamic white | 3000 K      | 4000 K          | dynamic white |              |                                                                                     |
| 1186mm  | 2936lm/ 30 W | 3274lm/ 30W   | 3493lm/ 30W | 4384lm/ 51 W    | 4872lm/ 51 W  | 5136lm/ 51 W | 7,5 kg                                                                              |
| 1471 mm | 3563lm/ 37 W | 3974lm/ 37W   | 4367lm/ 38W | 4957lm/ 56W     | 4957lm/ 56W   | 6123lm/ 58W  | 9,0 kg                                                                              |

### ACCESSORIES - DECORATIVE FRAME

T11-1-2-SW

### 1 OUTPUT

|                                                                                       |                                                                                       |                      |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------|
|    |    | non-dim DALI         |
|    |    | Sensor DALI          |
|  |  | Sensor dynamic white |

## 2 SIZE

|         |            |
|---------|------------|
| 1186 mm | <b>118</b> |
| 1471 mm | <b>147</b> |



## ACCESSORIES - SENSOR DALI

54P913700359103 Extended IR Programming Tool

54P913700392403 IR Remote Control


### ENERGY SAVING TIP

One SKAI luminaire is capable to perfectly illuminate two workspaces at the same time.

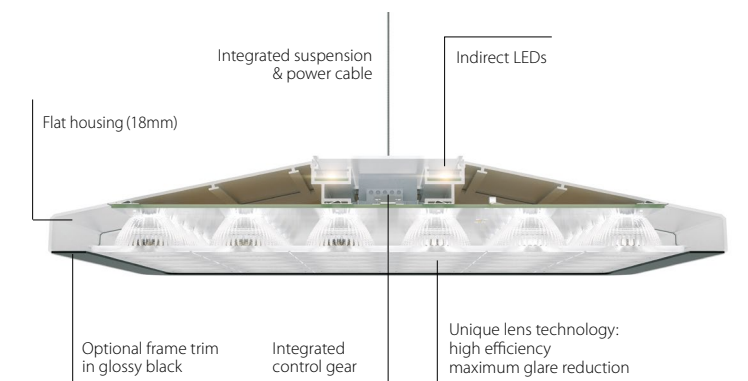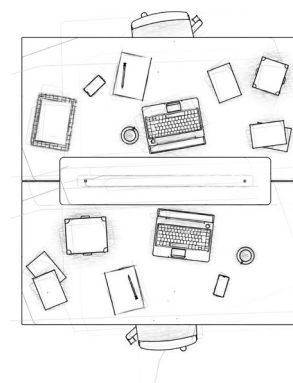

230V | UGR &lt; 16 | up to L90 / 50.000 h | up to 106 lm/W | up to 5548 lm/m | MacAdam 3 | DALI switchDIM

# 7 CABLE COLOURS

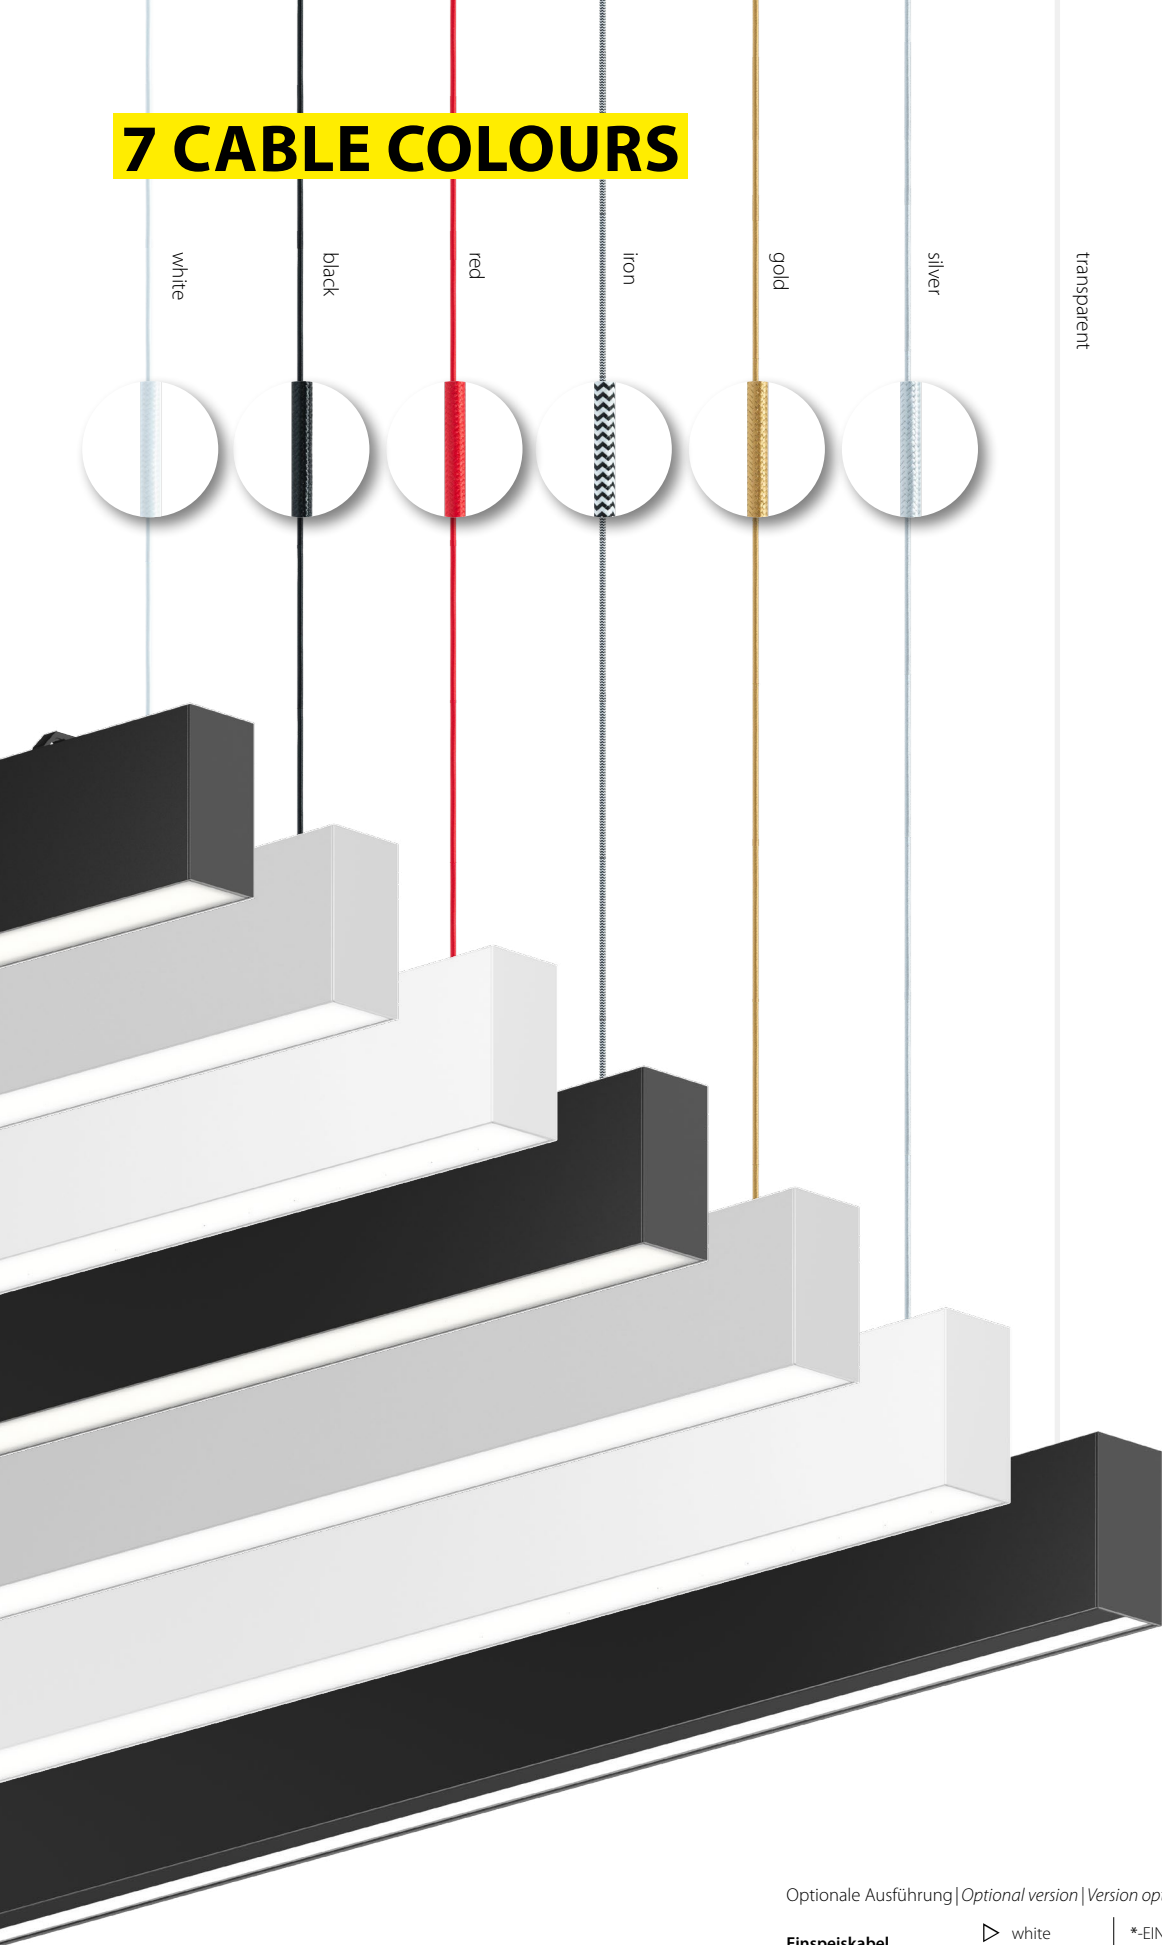

Optionale Ausführung | Optional version | Version optionnelle | Versione opzionale

Einspeiskabel  
Suspension cable  
Câble d'alimentation  
Cavo di alimentazione

1750 mm  
5 x 0,75 mm²

|          |              |
|----------|--------------|
| ▷ white  | *-EIN-WHITE  |
| ▷ black  | *-EIN-BLACK  |
| ▷ red    | *-EIN-RED    |
| ▷ iron   | *-EIN-IRON   |
| ▷ gold   | *-EIN-GOLD   |
| ▷ silver | *-EIN-SILVER |



Transparent cable incl. (standard version)

for special requests



# 90 HOUSING COLOURS



