



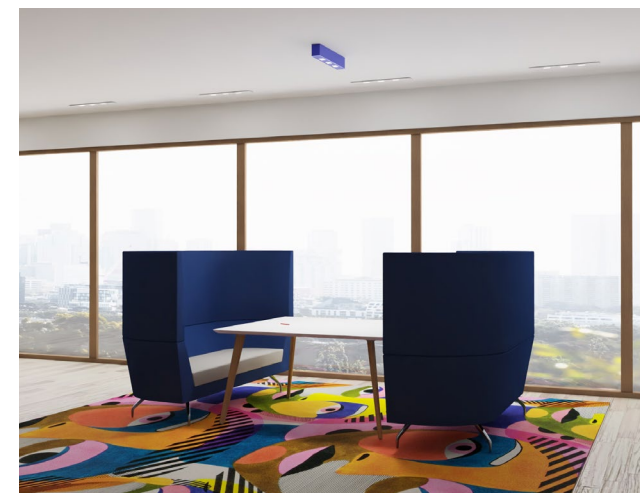

pure3
triflect

pure3
triflect

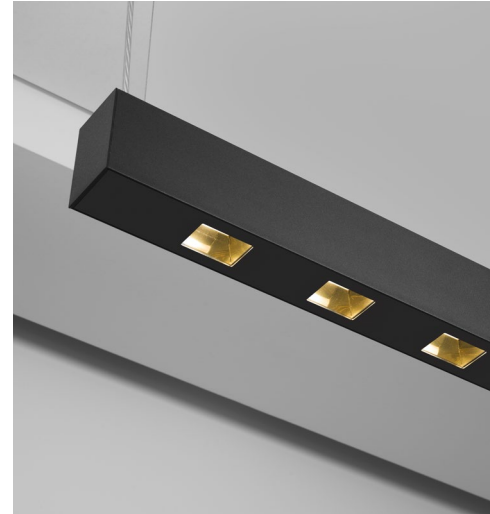

ONE LUMINAIRE, SO MANY OPTIONS!

TRIFLECT is our brand new profile luminaire with integrated LED downlights. It comes in two different sizes and is available as recessed, surface mounted or suspended version. And thanks to insets for PURE 3, TRIFLECT perfectly fits into the exclusive PLANLICHT profile system for profile lines of individual lengths.




LET IT SHINE!

Choose from two different reflector materials.

Silver Matte reflectors provide a colour temperature of 4.000 K - perfect for every workplace!

High-Gloss Gold makes TRIFLECT a glamorous highlight in any interior design and the golden reflectors create a slightly warmer lighting of 3.800 K.

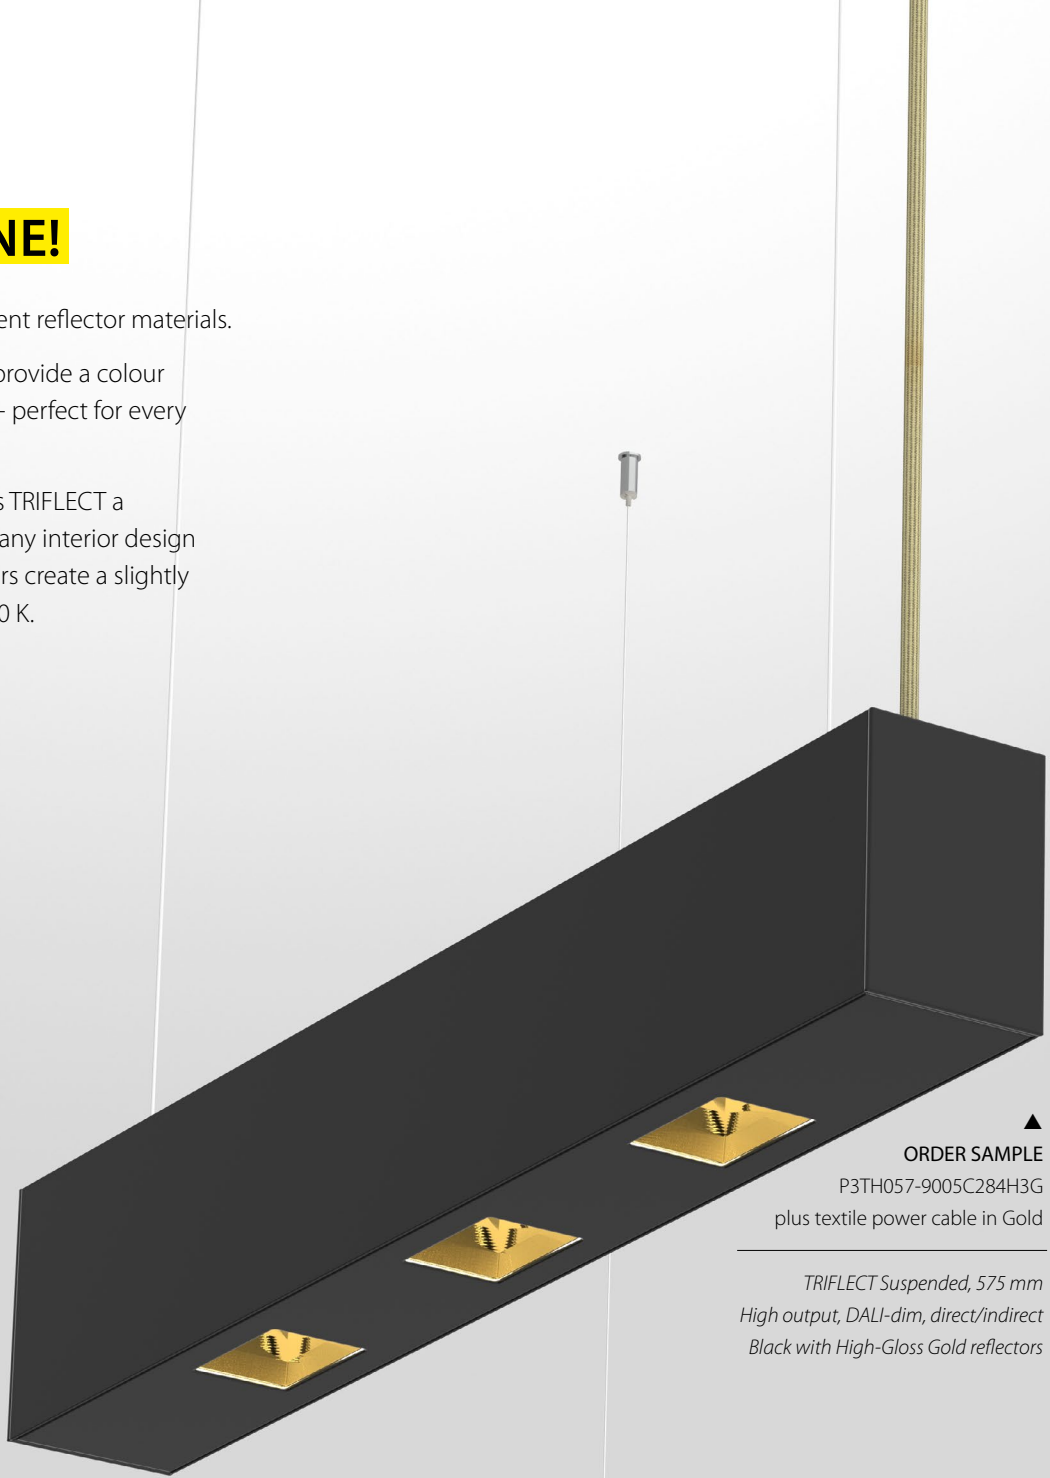


▲
ORDER SAMPLE
P3TH057-9005C284H3G
plus textile power cable in Gold

*TRIFLECT Suspended, 575 mm
High output, DALI-dim, direct/indirect
Black with High-Gloss Gold reflectors*

ORDER SAMPLE
P3TH180-9005C1840H1P
plus textile power cable in Silver

*TRIFLECT Suspended 1801 mm
Low output, non-dim, direct
Black with Silver Matte reflectors*

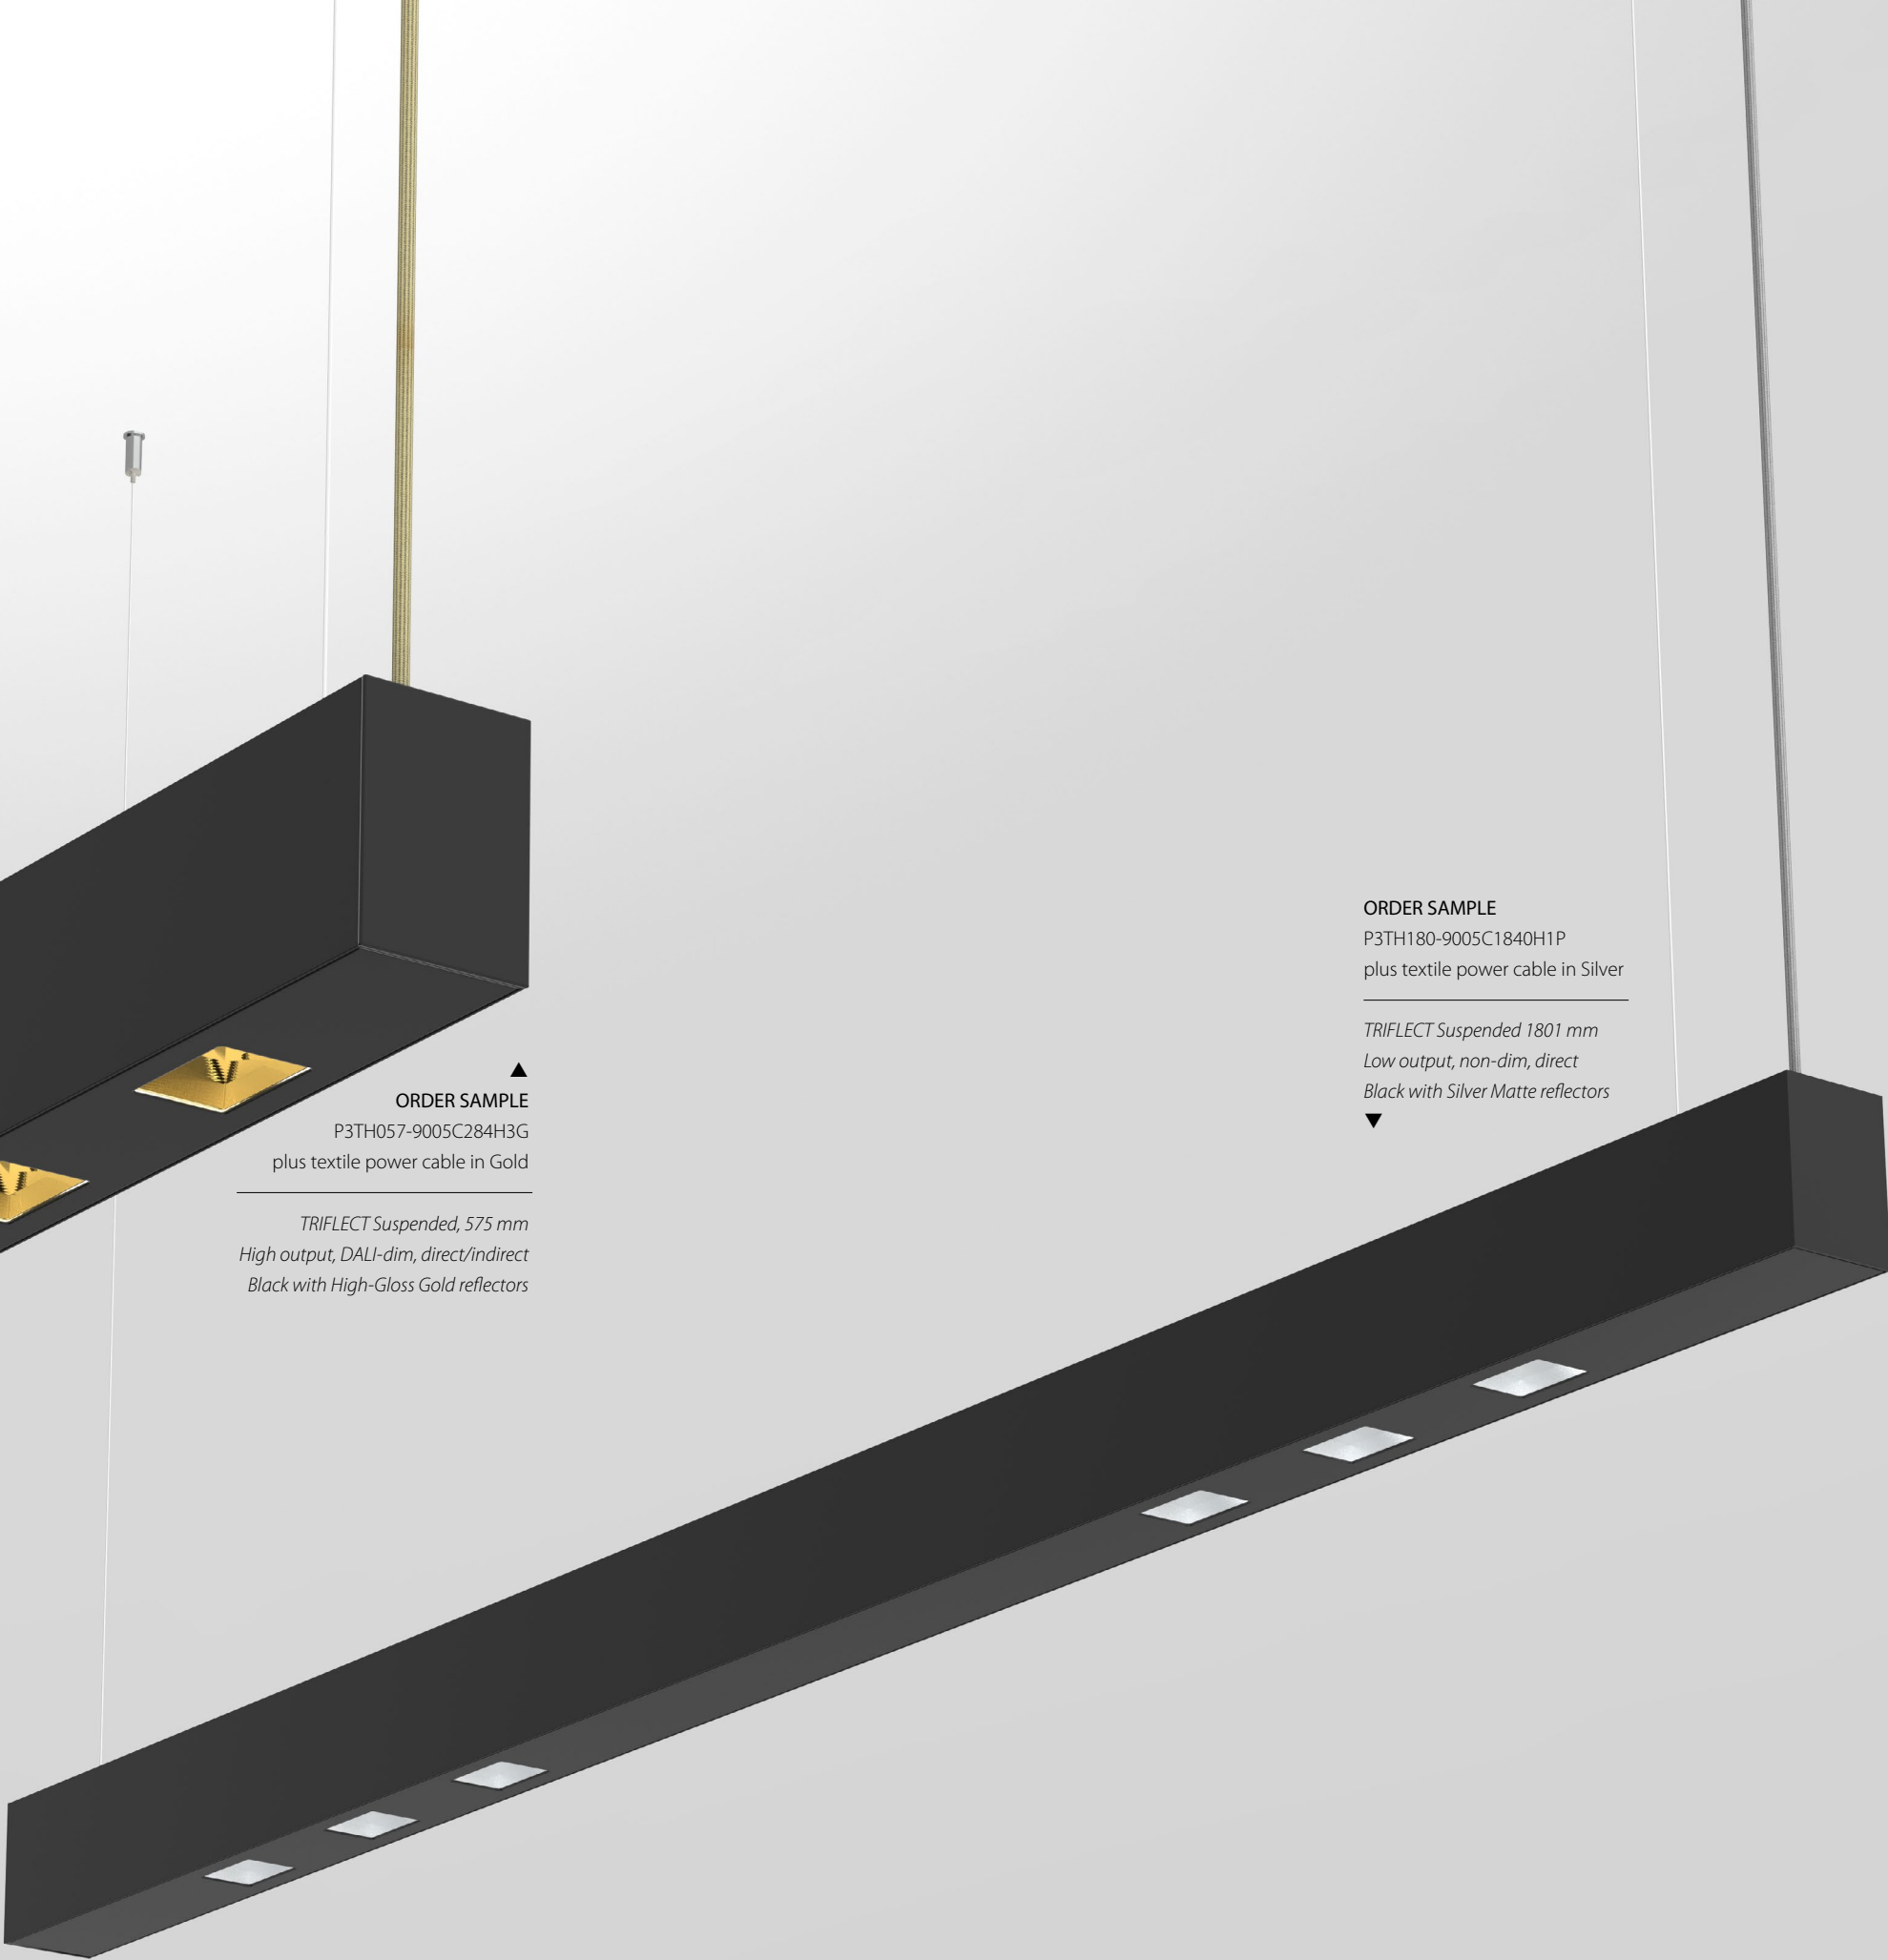

ADDITIONAL FEATURES


Beyond different mounting types, sizes, colours and reflector materials, TRIFLECT is also available with a number of additional features and functionalities:

Choose between different **textile-covered power cables** in various colours or add **indirect lighting** capabilities to your TRIFLECT suspended luminaire. **Emergency lighting** with integrated batteries is available on request.




pure 3 triflect

Aufbauleuchte
Surface-mount luminaire
Luminaire en saillie
A superficie

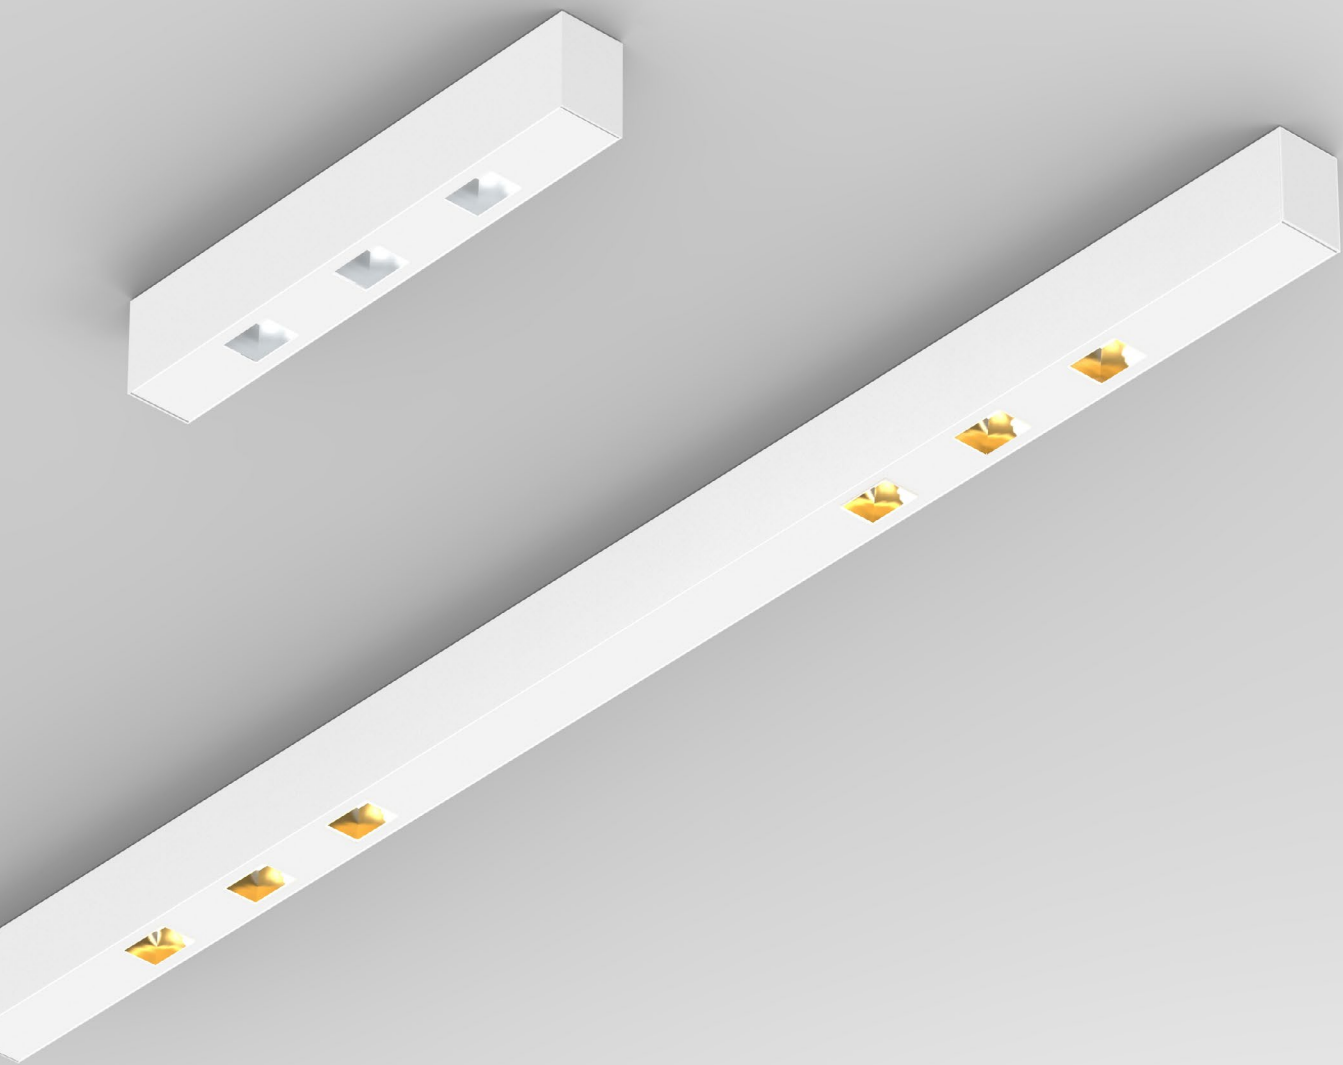


1 SIZE	2 COLOUR	3 OUTPUT
575 mm (3 spots)	057 silver	9006 low output
1801 mm (6 spots)	180 white	9016 high output
	black	
	RAL of your choice (p. 21)	
4 CONTROL	5 REFLECTOR	
non-dim	1 silver matte	P
DALI-dim	3 high-gloss gold	G



PURE 3 TRIFLECT



Reflector gold



Reflector silver




LUMINOUS FLUX (LM) / SYSTEM POWER (W)			
4000K satiné, CRI > 80	low output	high output	
575 mm	1851 lm / 17,5 W	3018 lm / 32 W	2,2 kg
1801 mm	3702 lm / 35 W	6036 lm / 65 W	6,0 kg

COMPARE REFLECTOR COLOUR 1801 MM, 4000K, CRI > 80		
silver matte	3702 lm	6036 lm
high-gloss gold	3060 lm	5112 lm




pure 3 triflect direct



Hängeleuchte
Pendant luminaire
Suspensions
Sospensione



direct high-gloss gold



direct silver matte

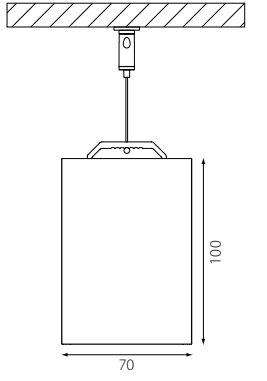

PURE 3 TRIFLECT DIRECT

LUMINOUS FLUX (LM) / SYSTEM POWER (W), CRI > 80

4000K silver matte	low output	high output	
575 mm	1851 lm/17,5W	3018 lm/32W	2,5 kg
1801 mm	3702 lm/35W	6036 lm/65W	6,3 kg

COMPARE REFLECTOR COLOUR 1801 MM

4000 K silver matte	3702lm	6036lm
4000 K high-gloss gold	3060lm	5112lm

1 SIZE

575 mm (3 spots)
1801 mm (6 spots)

2 COLOUR

057  silver

180  white

 black

 RAL of your choice (p. 21)

3 OUTPUT

low output

high output

4 CONTROL

 non-dim
  DALI-dim

5 REFLECTOR

1  silver matte

3  high-gloss gold

P3TH**1**-**2**C1840**3****4****5**

P3TH057-9016C1840H1G 575 mm, white, high output, non-dim, gold (order sample)

● CONFIGURE ONLINE


katalog.planlicht.com




230V | up to L90/50.000 h | up to 106 lm/W | up to 5249 lm/m | IEC 62471: Blue light hazard: RG ≤ 1 | MacAdam 3 | DALI switchDIM

pure 3 triflect direct-indirect



Hängeleuchte
Pendant luminaire
Suspensions
Sospensione



direct/indirect
Reflector gold



direct/indirect
Reflector silver

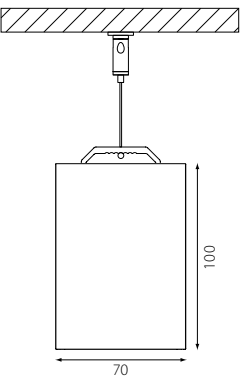

LUMINOUS FLUX (LM) / SYSTEM POWER (W), CRI > 80

4000K satiné	low output	high output	
575 mm	2879 lm / 23 W	4806 lm / 43 W	2,7 kg
1801 mm	7331 lm / 54 W	12010 lm / 100 W	6,8 kg

COMPARE REFLECTOR COLOUR

4000 K silver matte	7331 lm	12010 lm
4000 K high-gloss gold	6689 lm	11086 lm


1 SIZE	2 COLOUR	3 OUTPUT
575 mm (3 spots)	057 silver	9006 low output L
1801 mm (6 spots)	180 white	9016 high output H
	black	9005
	RAL of your choice (p. 21)	
4 CONTROL	5 REFLECTOR	
non-dim	1 silver matte P	
DALI-dim	3 high-gloss gold G	

PURE 3 TRIFLECT DIRECT / INDIRECT



230V | UGR < 19 | up to L90/50.000 h | up to 136lm/W | up to 8358lm/m | IEC 62471: Blue light hazard: RG ≤ 1 | MacAdam 3 | DALI switchDIM

7 CABLE COLOURS

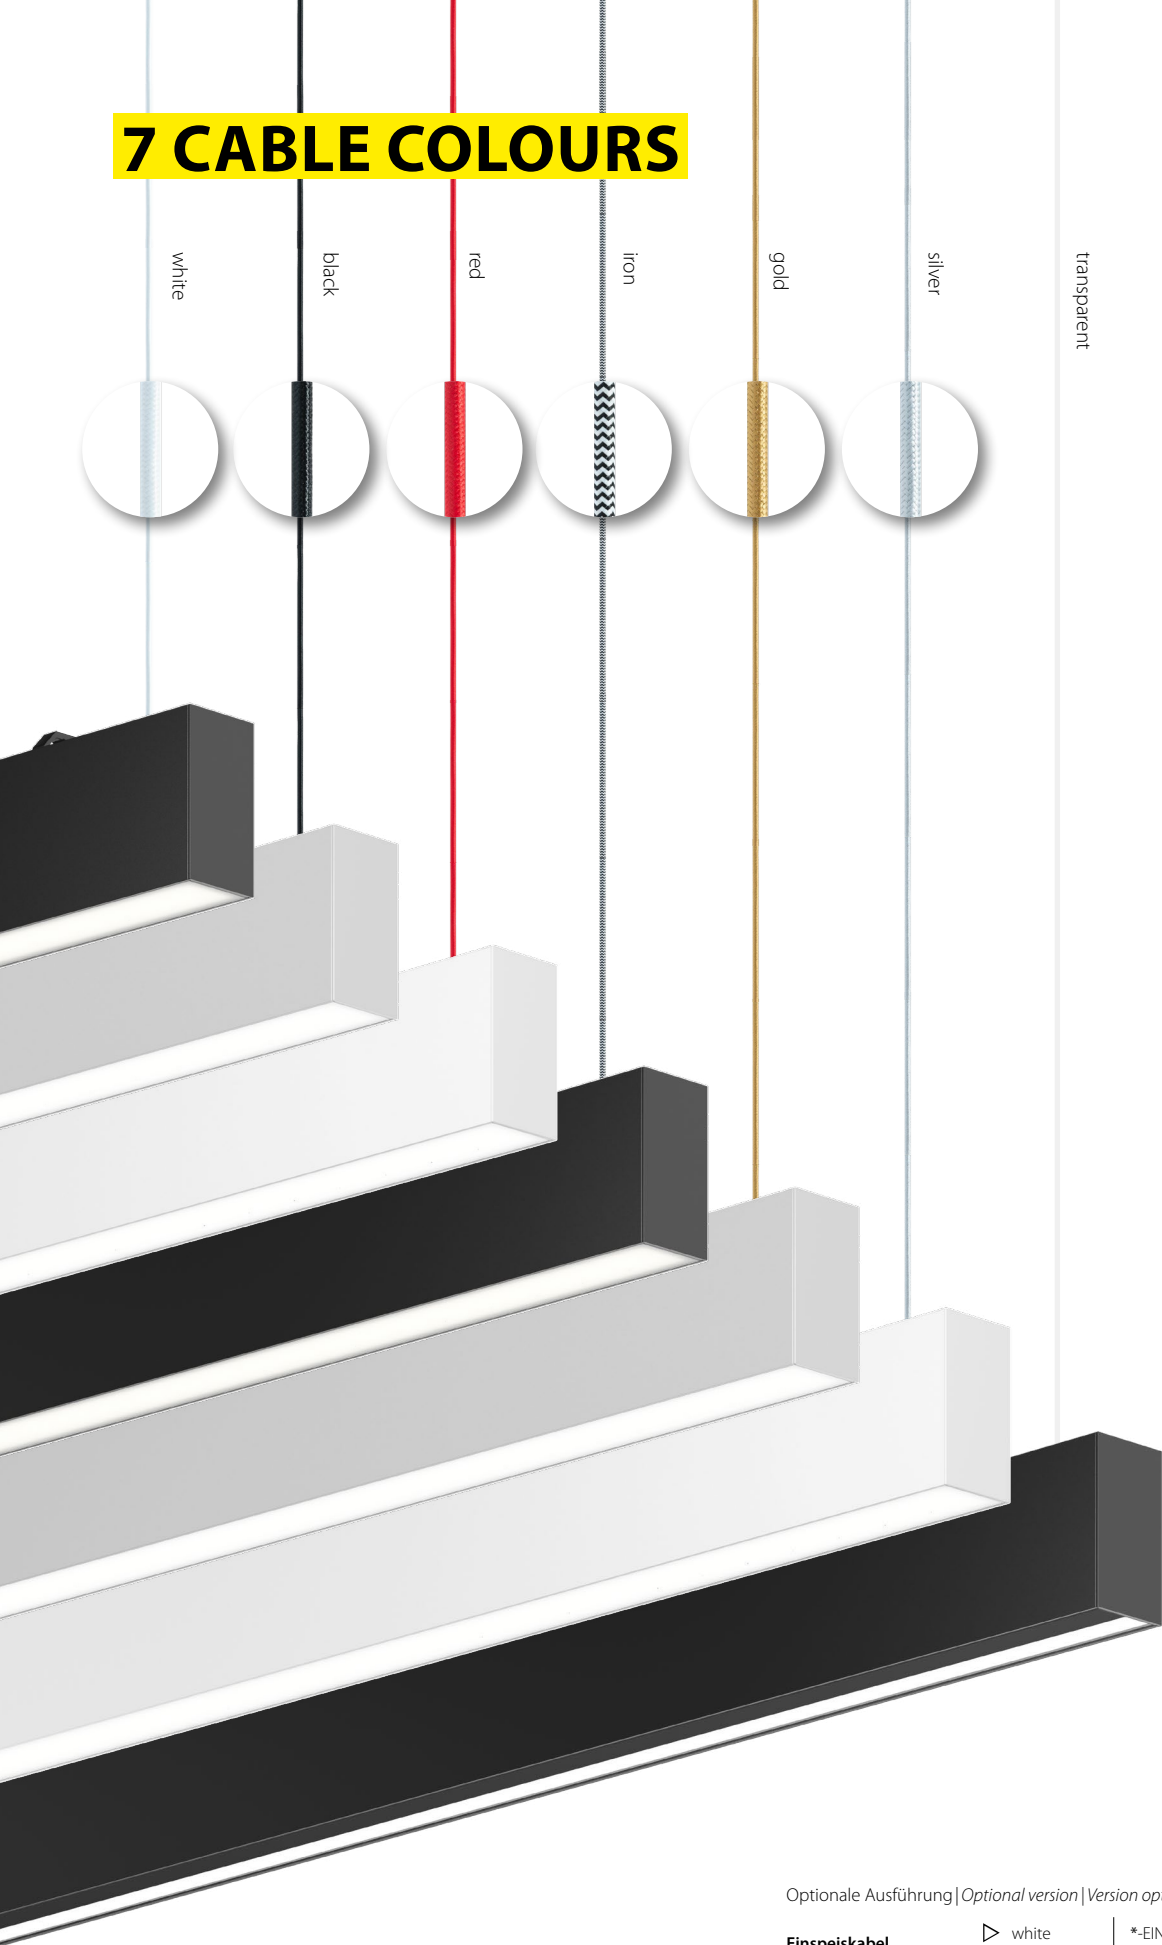

Optionale Ausführung | Optional version | Version optionnelle | Versione opzionale

Einspeiskabel
Suspension cable
Câble d'alimentation
Cavo di alimentazione

1750 mm
5 x 0,75 mm²

Transparent cable incl. (standard version)

▷ white	*-EIN-WHITE
▷ black	*-EIN-BLACK
▷ red	*-EIN-RED
▷ iron	*-EIN-IRON
▷ gold	*-EIN-GOLD
▷ silver	*-EIN-SILVER



for special requests

90 HOUSING COLOURS



