


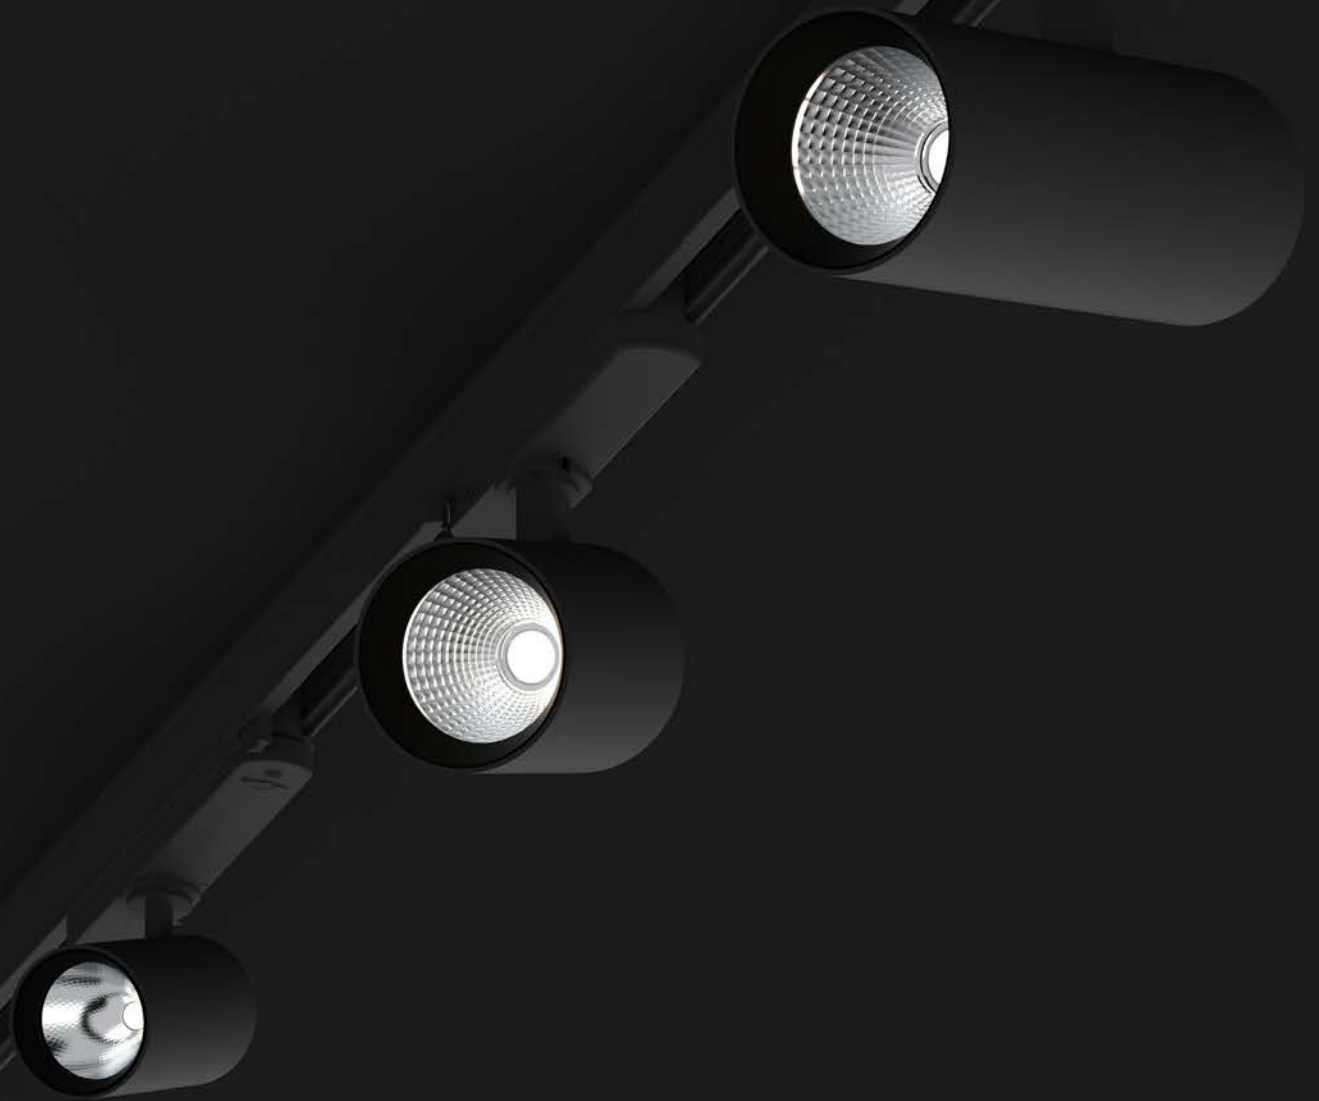


zenit


zenit

DESIGNER'S


SPOTLIGHT FAMILY



Surface




Pendant



Recessed



Systems



Track



ZENIT - DESIGNER'S SPOTLIGHT FAMILY

Inspiration



ZENIT FEATURES



ENERGIEEFFIZIENZ

Die Leuchte liefert eine sehr hohe Lichtleistung bei geringem Stromverbrauch.

Energy efficiency
Haute puissance lumineuse



DREHBAR

Das Spotlight kann individuell eingestellt werden: Drehung bis zu 355°

Swivelling
Tournant



SCHWENKBAR

Optimale Beleuchtung: bis zu 90° schwenkbar

Tilt
Pivotant



SPEZIELLE LICHTFARBEN

Spezielle LED-Versionen erhältlich für Retail-Beleuchtungen.

Special light colours
Couleurs de la lumière spéciales

SPEZIELLE OPTIKEN

Wählen Sie aus verschiedenen Reflektoren, Linsen, einschließlich der Wabenlinse.

Special optics
Optiques spéciales



INSETS FÜR PROFILSYSTEME

zenit ist auch für pure 3, p.forty, p.thirty und 3-Phasen-Schienensysteme verfügbar.

Insets for profile systems
Inserts pour systèmes de profilé



INTEGRIERTES VORSCHALTGERÄT

Human Centric Lighting mit einstellbarem Weißlicht von 2.700 bis 6.500 Kelvin.

Driver integrated
Ballast intégré



INDIVIDUELLE FARBEN

Die Gehäuse, Einsätze und Stromkabel sind in verschiedenen Farben erhältlich.

Individual colours
Couleurs de corps individuelles



UNTERSCHIEDLICHE GRÖSSEN



VERSCHIEDENE MONTAGEARTEN FÜR ZENIT M



ZENIT XXS



ZENIT XXS

SEGMENTE & HÄNGELEUCHTEN



ZENIT XXS | ENDLOSE VIELFALT, ELEGANTE LEICHTIGKEIT

Die zenit-Familie darf sich über Verstärkung freuen – mit den zenit XXS-Spots präsentiert PLANLICHT den bisher kleinsten zenit-Spot mit einem Durchmesser von nur 31 mm. Dieses winzige Kraftpaket bietet eine bemerkenswerte Vielseitigkeit und ermöglicht die ideale Raumbeleuchtung:

Farben: zenit XXS ist nicht nur leistungsstark, sondern auch ästhetisch ansprechend und in vier verschiedenen Farboptionen erhältlich: Schwarz, Weiß, Silber und Aluminium (im schwarzen Profil/mit schwarzem Baldachin).

Ausstrahlwinkel: Dank der hochwertigen asphärischen Glaslinse wird das perfekte Licht garantiert und die Wahl zwischen engem

und breitem Strahlungswinkel bietet zudem die Möglichkeit der individuellen Raumbeleuchtung.

AUSFÜHRUNGEN:

- Segment für p.thirty-Profilserie mit 1 – 5 Spots
- Segment für p.thirty-Profilserie mit 1 oder 2 Pendants
- Hängeleuchte Balken mit 2 oder 4 Pendants
- Hängeleuchte rund mit 1, 3 oder 5 Pendants

Die unendlichen Möglichkeiten der zenit-Familie mit den neuen zenit XXS Spots – für eine Beleuchtung, die nicht nur funktional, sondern auch ästhetisch ansprechend ist.

ZENIT XXS | ENDLESS VARIETY, ELEGANT LIGHTNESS!

The zenit family welcomes a new addition – with the zenit XXS, PLANLICHT introduces the smallest zenit spotlight to date with a diameter of only 31 mm. This tiny powerhouse offers remarkable versatility, enabling perfect illumination of every corner of the room:


Colours: zenit XXS is not only powerful but also aesthetically pleasing, available in four different colour options: black, white, silver, and aluminium (in black profile/with black canopy).

Beam Angle: Thanks to the high-quality aspherical glass lens, perfect light is guaranteed, and the choice between narrow and wide beam angles allows for individual room lighting options.

VARIANTS:

- Segment for p.thirty profile series with 1 – 5 spots
- Segment for p.thirty profile series with 1 or 2 pendants
- Pendant bar suspension light with 2 or 4 pendants
- Round pendant suspension light with 1, 3, or 5 pendants

Explore the endless possibilities of the zenit family with the new zenit XXS spots – for lighting that is not only functional but also aesthetically pleasing.

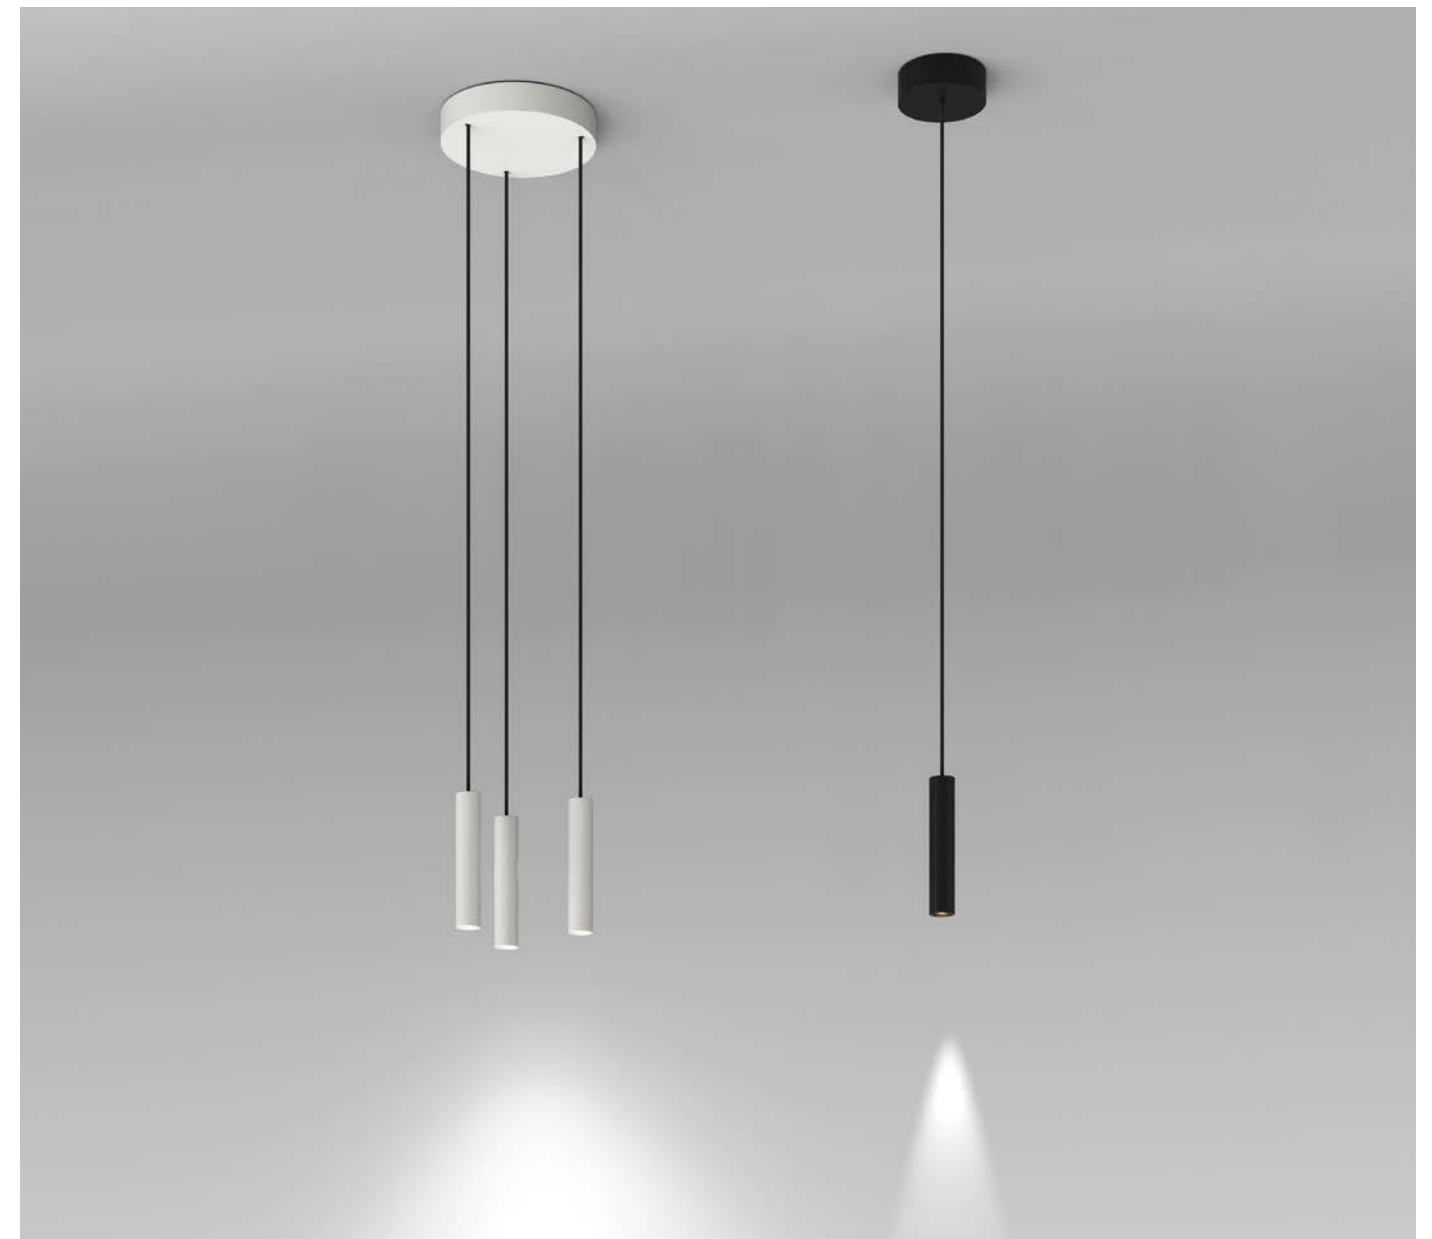

ZENIT M



zenit M mit Aufbau-Baldachin | *with surface baldachin*

zenit M low to very high output
with universal adapter



zenit M Einbaustrahler | *recessed mounted*
fixed version



zenit M Einbaustrahler | *recessed mounted*
swivelling version

TUBUSFARBEN | *TUBE COLOURS*


zenit M hängender Aufbaustrahler | *suspended downlight*



zenit M extra high output
with intrack adapter



zenit M Einbaustrahler | *recessed mounted*
flip version

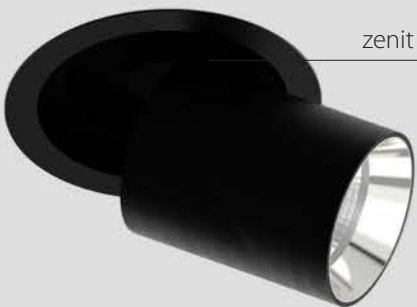

zenit M Aufbaustrahler | *surface mounted downlight*



black matte 9005 (SW)



high-gloss silver (BB)



silver matte (PP)



high-gloss black chrome (ZZ)



high-gloss copper (KK)



capital copper (RR)



high-gloss gold (GG)




glaring gold (DD)



gunnery grey (YY)



ZENIT M
ONE SPOTLIGHT, SO MANY OPTIONS!

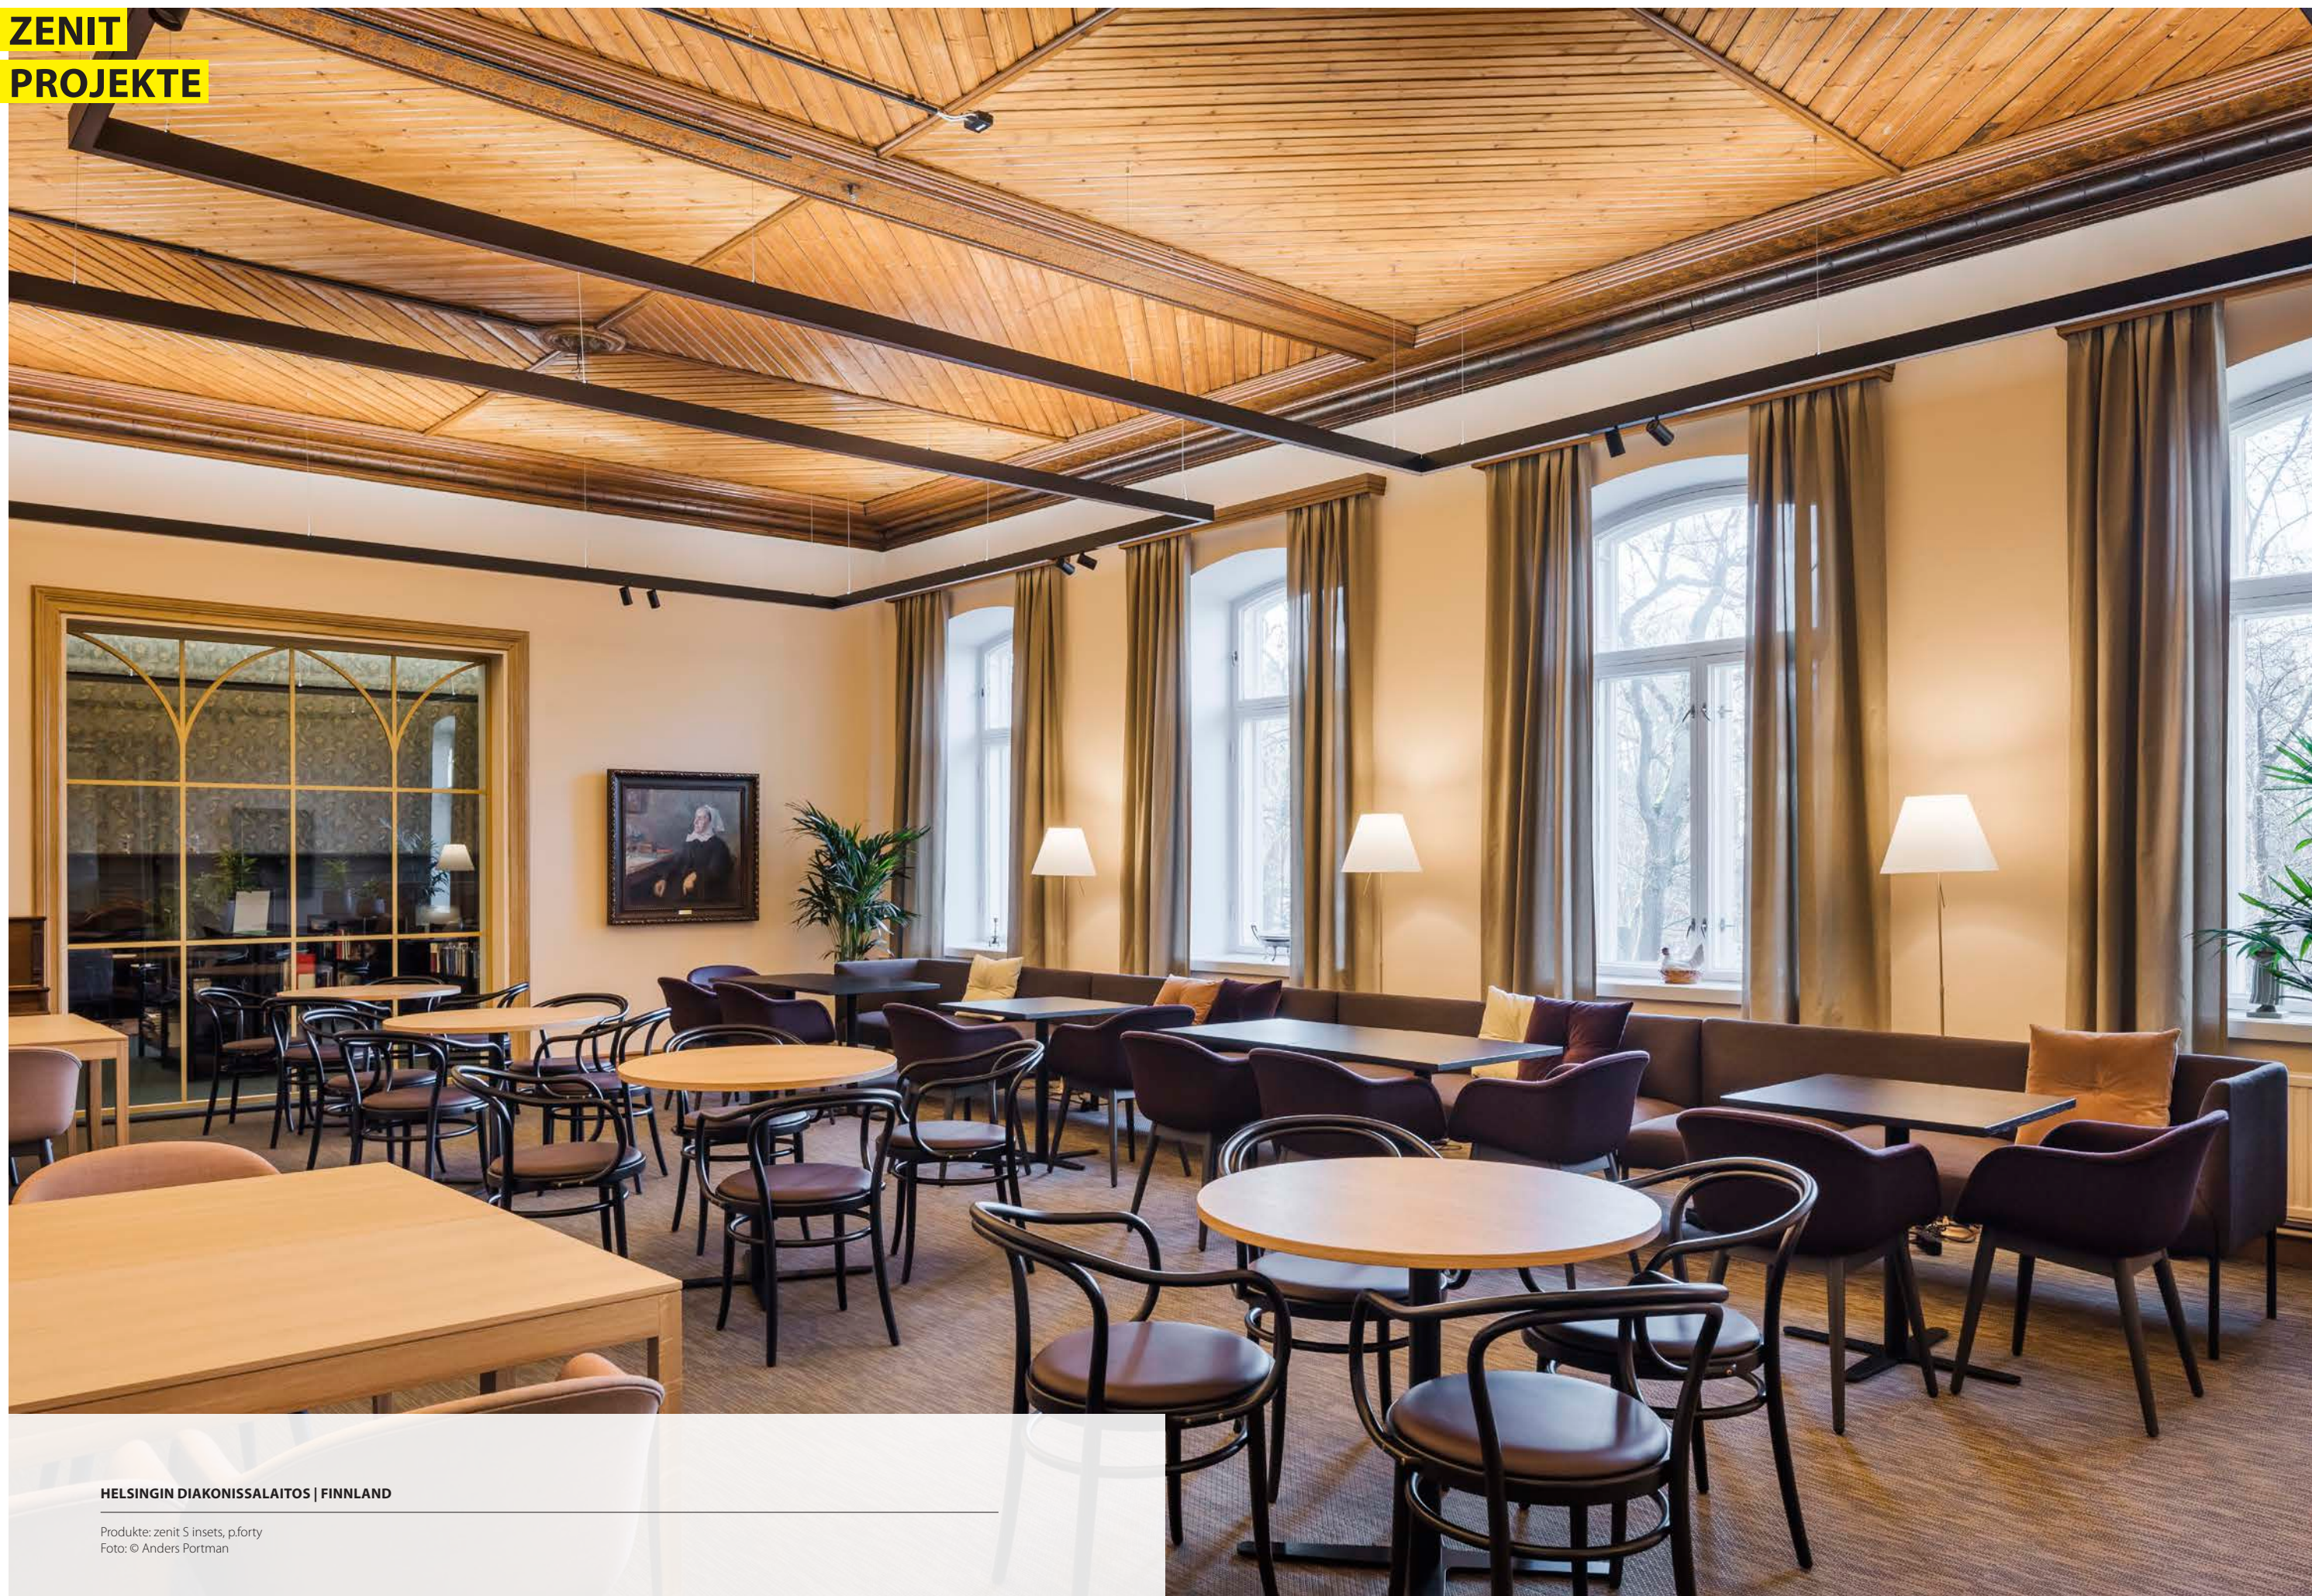

HELSINGIN DIAKONISSALAITOS | FINNLAND

Produkte: zenit S insets, p.forty
Foto: © Anders Portman



WÜRTH MODYF KÜNZELSAU | DEUTSCHLAND

Produkt: zenit M



DROPA | SCHWEIZ

Produkte: zenit S inset, pure 3
Foto: © LED-X

zenit M

Aufbaustrahler
Surface luminaire
Spot en saillie



1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

SW
BB
PP
ZZ
KK
RR
GG
DD
YY

2 HOUSING COLOUR

- white
- black
- RAL of your choice

3 LED

- | | |
|---------------------|-----|
| 3000 K, CRI > 80 | 830 |
| 4000 K, CRI > 80 | 840 |
| 2700 K, CRI > 90 | 927 |
| 3000 K, CRI > 90 | 930 |
| 3500 K, CRI > 90 | 935 |
| 4000 K, CRI > 90 | 940 |
| 3250 K Fashion | FAS |
| Bakery goods | BAC |
| Meat | FLE |
| Sausage products | WUR |
| Fish | FIS |
| Fruits & vegetables | FRU |

4 OUTPUT

- low output
- medium output
- high output
- very high output

L
M
H
V

5 CONTROL

- non-dim
- DALI

1
3

6 REFLECTOR


- | | |
|-----|---|
| 23° | 2 |
| 40° | 4 |
| 60° | 6 |

S10A200-12C13456


S10A200-GGWSC1FLEM34 lenstube high-gloss gold, housing white, IP20, direct, special LED, meat, medium output, DALI, 40° (order sample)

➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT M | SURFACE

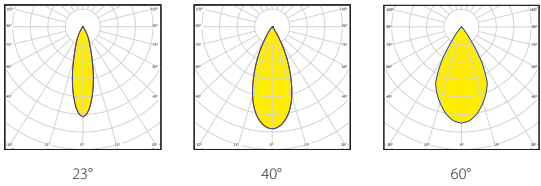

Weight (kg)
0,9 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17 - 18,5W			very high output / 23 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm
LF935 3500 K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm
LF940 4000 K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster <i>Honeycomb glare protection</i> <i>Filtre anti-éblouissement nid d'abeilles</i>	S10-BLE-80
Ovalzeichnerlinse <i>Refractor for elliptical distribution</i> <i>Lentille ovalisante</i>	S10-OZL-80
Klares Schutzglas <i>Clear protective glass</i> <i>Verre de protection transparent</i>	S10-SGL-80
Weichzeichnerglas <i>Diffuser protection glass</i> <i>Weichzeichnerglas</i> <i>Verre effet flou</i>	S10-WGL-80

Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 129 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI touch switch DIM

zenit M variable

Aufbaustrahler
Surface luminaire
Spot en saillie



1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- 3250 K Fashion FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V

6 REFLECTOR


- 23° 2
- 40° 4
- 60° 6

S10B200-12C13456


S10B200-GGWSC1FLEM34 lenstube high-gloss gold, housing white, IP20, direct, special LED, meat, medium output, DALI, 40° (order sample)

➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT M | SURFACE

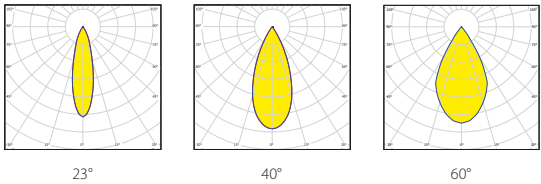

Weight (kg)
1,1 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17 - 18,5W			very high output / 23 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm
LF935 3500 K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm
LF940 4000 K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 129lm/W | up to 2658lm | IEC 62471: Blue light hazard: RG ≤ 1 | DALI touch switch DIM

zenit XXS

Hängeleuchte
Pendant luminaire
Suspension

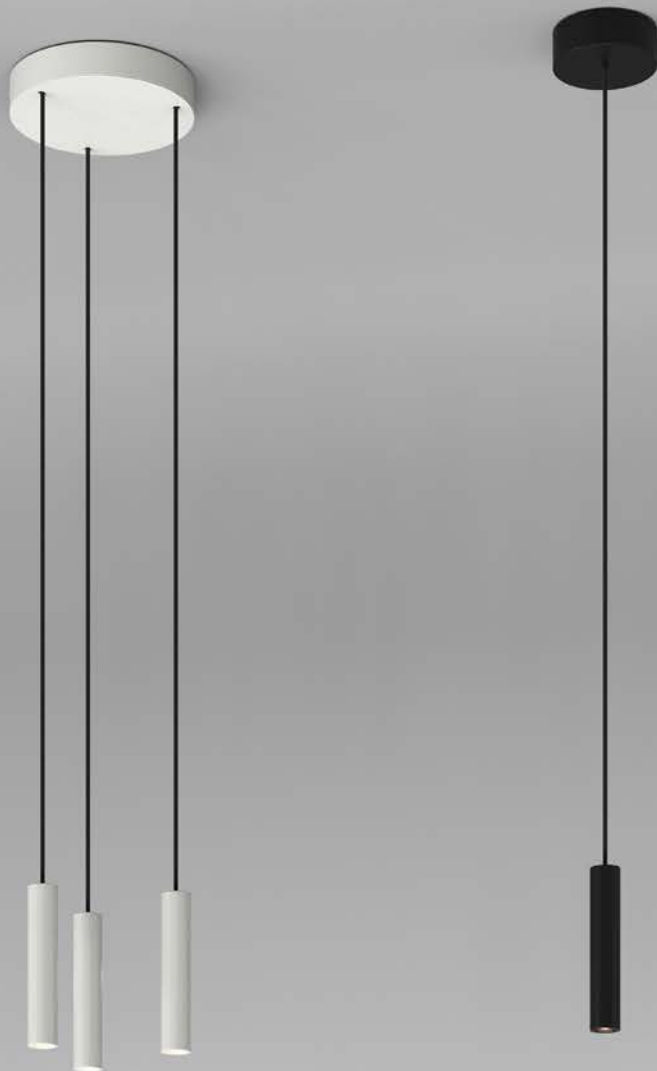


1 CANOPY		2 LIGHTING BODY / CANOPY COLOUR		3 CONNECTION / CABLES	
Built-in canopy round, small (1 tube only)	E		lighting body	1 (M/E only)	1
Canopy round, small (1 tube only)	M	silver	SI	3 (R only)	3
Canopy round, medium (3 tube only)	R	white	WS		
		black	SW		
		aluminium natural transparent	AT		

4 LED		5 CONTROL		6 BEAM	
2700 K, CRI > 90	927	non dim	1	12°	1
3000 K, CRI > 90	930	DALI	3	32°	3
4000 K, CRI > 90	940				

S10H171-N2C34X56


S10H17R-NSIPC3927X11 pendant, lighting body 170 mm, surface-mount housing, medium, 3 connection-cables, tube colour black, lighting body colour silver, surface-mount housing silver, IP 20, 3 equal body lengths, CRI > 90, 2700 K, DALI dim, beam angle 12° (order sample) [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS | PENDANT

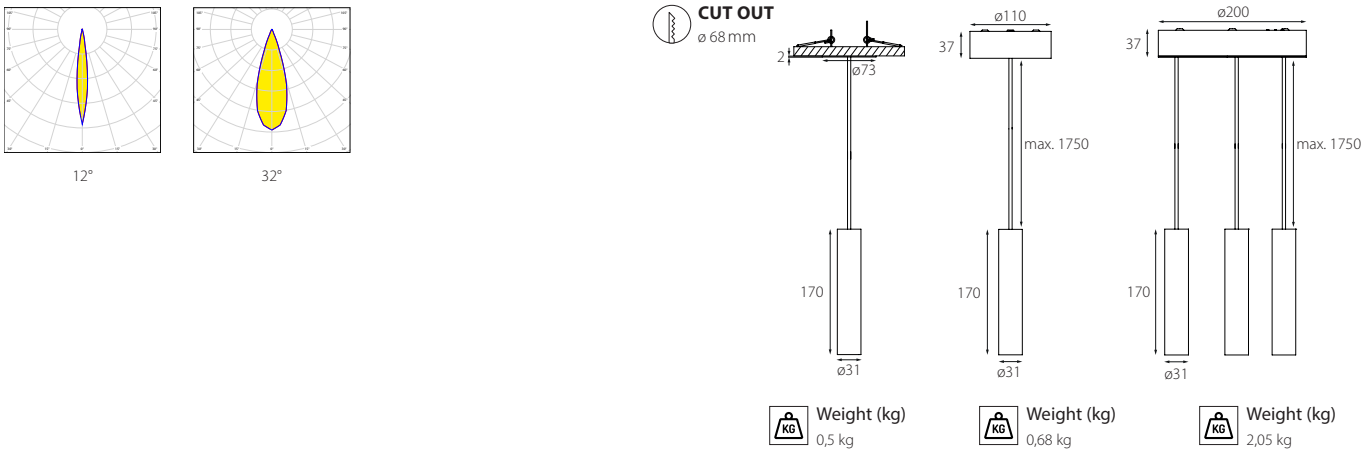

LUMINOUS FLUX (LM) / SYSTEM POWER (W)



	12°		32°	
	1 spot (7 W)	3 spots (16,5 W)	1 spot (7 W)	3 spots (16,5 W)
LF927 2700 K	183 lm	549 lm	272 lm	816 lm
LF930 3000 K	189 lm	567 lm	280 lm	840 lm
LF940 4000 K	197 lm	591 lm	292 lm	876 lm




Down to UGR ≤ 16 | up to 53 lm / W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XXS

Hängeleuchte
Pendant luminaire
Suspension

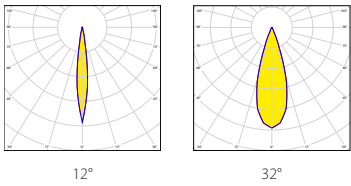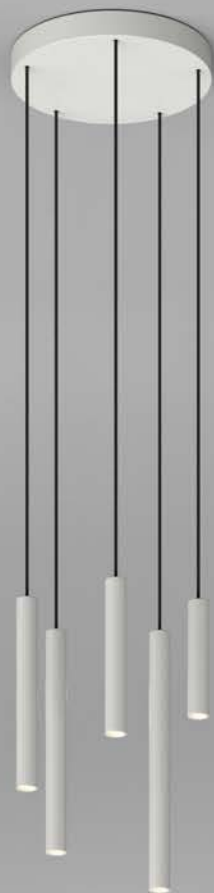

ZENIT XXS | PENDANT

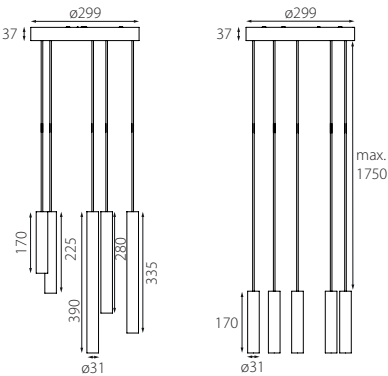

Weight (kg)
4,42 kg

Weight (kg)
3,42 kg


LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12° (26W)	32° (26W)
LF927 2700K	915lm	1360lm
LF930 3000K	945lm	1400lm
LF940 4000K	985lm	1460lm

1 CANOPY	2 LIGHTING BODY / CANOPY COLOUR	3 LIGHTING BODY/LENGTHS
Canopy round, large	silver white black aluminium natural transparent	lighting body canopy SI P WS W SW N AT N
		5 equal sizes 5 various sizes 5 X
4 LED	5 CONTROL	6 BEAM
2700 K, CRI > 90 3000 K, CRI > 90 4000 K, CRI > 90	non dim DALI	12° 32°
927 930 940	1 3	1 3

S10H17 1-N 2-C 3-4-X 5-6


S10H17V - NATNC5930X31 pendant, round canopy, body 170 mm, surface-mount housing, 5 connection-cables, tube colour black, lighting body colour aluminium natural transparent, surface-mount housing black, IP 20, 5 equal body lengths, CRI > 90, 3000 K, DALI dim, beam angle 32° (order sample) [Configure online on KATALOG.PLANLICHT.COM](#)




Down to UGR ≤ 16 | up to 56 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XXS


Hängeleuchte
Pendant luminaire
Suspension




12°



32°

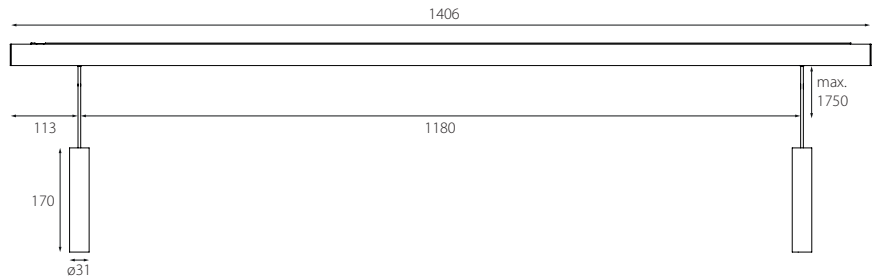

Weight (kg)
1,82 kg

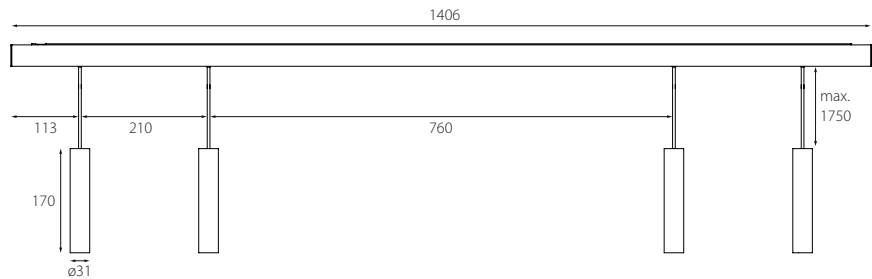

Weight (kg)
2,42 kg

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°		32°	
	2 spot (11,5 W)	4 spots (21 W)	2 spots (11,5 W)	4 spots (21 W)
LF927 2700 K	366 lm	732 lm	544 lm	1088 lm
LF930 3000 K	378 lm	756 lm	560 lm	1120 lm
LF940 4000 K	394 lm	788 lm	584 lm	1168 lm

1 CANOPY

Rectangular bar (2/4 tubes only)

S

2 LIGHTING BODY / HOUSING COLOUR



silver



white



black



aluminium natural
transparent

lighting
body

SI

WS

SW

AT

housing

P

W

N

N

3 CONNECTION-CABLES

2 (S only)

2

4 (S only)

4

4 LED



2700 K, CRI > 90

927



3000 K, CRI > 90

930



4000 K, CRI > 90

940

5 CONTROL



non dim

1



DALI

3

6 BEAM



12°

1




32°

3

S10H17 1-N 2-C 3-4-X 5-6

S10H17S - NWSWC4940X31 pendant, lighting body 170 mm, surface-mount housing, 4 connection-cables, tube colour black, lighting body white, surface-mount housing black, IP 20, 4 equal lighting body lengths, CRI > 90, 4000 K, DALI dim, beam angle 32° (order sample)

► Configure online on [KATALOG.PLANLICHT.COM](https://katalog.planlicht.com)



Down to UGR ≤ 16 | up to 56 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit M

Aufbaustrahler hängend
Pendant downlight
Spot en saillie suspendu



1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

SW

BB

PP

ZZ

KK

RR

GG

DD

YY

2 HOUSING COLOUR

- white
- black
- RAL of your choice

WS

SW

☛

3 LED

- 3000 K, CRI > 80 830
- 4000 K, CRI > 80 840
- 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

L

M

H

V

5 CONTROL

- non-dim
- DALI

1

3

6 BEAM


- 23° 2
- 40° 4
- 60° 6

S10H200-12C13456


S10H200-GGWSC1FLEM34 pendant, high-gloss gold, white housing, special LED "meat", medium output, DALI, 40° (order sample)

► Configure online on KATALOG.PLANLICHT.COM

ZENIT M | PENDANT

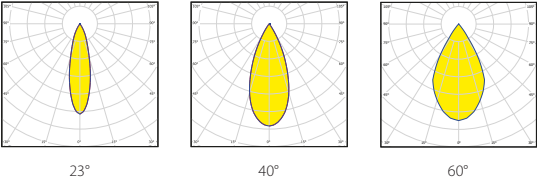

Weight (kg)
1 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17 - 18,5W			very high output / 23 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm
LF935 3500 K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm
LF940 4000 K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglass Diffuser protection glass Weichzeichnerglass Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 129lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI touch switch DIM

zenit M fixed

Einbauleuchte
Recessed luminaire
Luminaire encastré

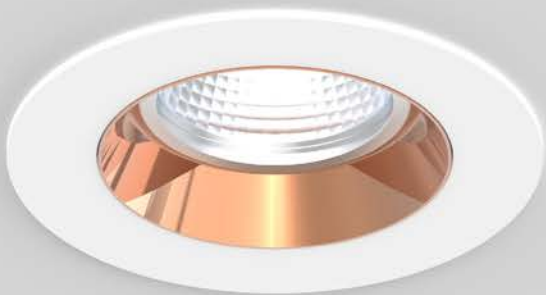

1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V

6 BEAM


- 23° 2
- 40° 4
- 60° 6

S10E115-12C13456


S10E115-RRWSC1830L14 ø 115 mm (fixed), tube capital copper, housing white, IP 20, direct, 3000K, CRI > 80, low output, non-dim, 40° (order sample)

► Configure online on KATALOG.PLANLICHT.COM


ZENIT M | RECESSED



23°




40°



60°

	CUT OUT	
	ø DIAMETER	↑ DEPTH
	ø 100 mm	131 mm

Weight (kg)
0,6 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOUR BLACK MATTE (NN)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17,5 - 19W			very high output / 23 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm
LF935 3500 K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm
LF940 4000 K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 125 lm / W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

zenit M flip

Einbauleuchte
Recessed luminaire
Luminaire encastré

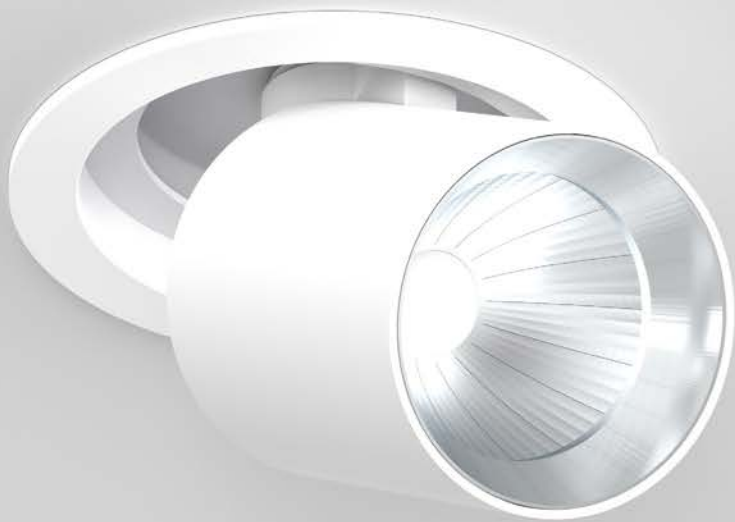

1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V

6 BEAM


- 1 23° 2
- 3 40° 4
- 60° 6

S10E140-12C13456

S10E140-RRWSC1830L14 ø 140 mm (flip), tube capital copper, housing, white, IP 20, direct, 3000 K, CRI > 80, low output, non-dim, 40° (order sample)


► Configure online on KATALOG.PLANLICHT.COM

ZENIT M | RECESSED

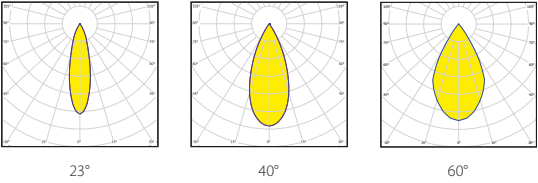

Weight (kg)
1,1 kg

CUT OUT
ø DIAMETER ø 130 mm
↑ DEPTH 181 mm



LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOUR BLACK MATTE (NN)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17,5 - 19W			very high output / 23 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm
LF935 3500 K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm
LF940 4000 K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80

Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.




Down to UGR ≤ 16 | up to 125 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

zenit XXS segment spots for p.thirty

Systeme | Segmente
Systems | Segments
Systèmes | Segment



1 PROFILE MOUNTING



surface
pendant
recessed

2 SPOTS

A 1 spot
H 2 spots
E 3 spots
4 spots
5 spots

3 COLOUR

1 silver
2 white
3 black
4 aluminium natural transparent

spot
SI
WS
SW
AT
housing &
blank cover
SI
WS
SW
SW

4 LED

927 2700 K, CRI > 90
930 3000 K, CRI > 90
940 4000 K, CRI > 90

5 CONTROL

X1 non-dim
X3 DALI

6 BEAM ANGLE


1 12°
3 32°

P30-1 ZBS 2 N 3 4 5 6

P30-AZBS1NATSW927X11 surface mounted p.thirty segment, zenit XXS surface variable, single spot, black tube, aluminium natural transparent spot, black housing & blank cover, 2700 K, CRI > 90, non-dim, 12°, IP 20 (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS | SYSTEMS

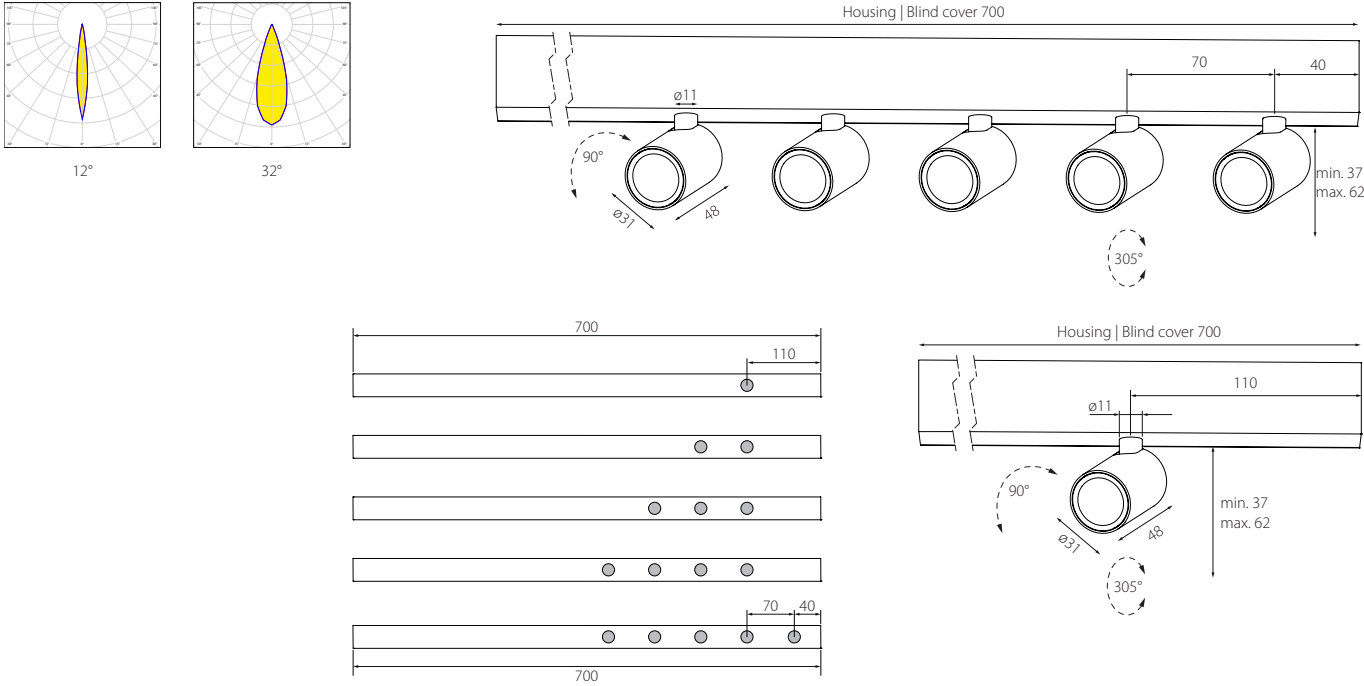

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°					32°				
	1 spot (7W)	2 spots (11,5W)	3 spots (16,5W)	4 spots (21W)	5 spots (26W)	1 spot (7W)	2 spots (11,5W)	3 spots (16,5W)	4 spots (21W)	5 spots (26W)
LF927 2700 K	183 lm	366 lm	549 lm	732 lm	915 lm	272 lm	544 lm	816 lm	1088 lm	1360 lm
LF930 3000 K	189 lm	378 lm	567 lm	756 lm	945 lm	280 lm	560 lm	840 lm	1120 lm	1400 lm
LF940 4000 K	197 lm	394 lm	591 lm	788 lm	985 lm	292 lm	584 lm	876 lm	1168 lm	1460 lm

WEIGHT

	non-dim	DALI
1 spot	720 g	740 g
2 spots	780 g	800 g
3 spots	840 g	860 g
4 spots	900 g	920 g
5 spots	960 g	980 g


based on recessed mounted version




Down to UGR ≤ 16 | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XXS segment
for p.thirty

Systeme | Segmente
Systems | Segments
Systèmes | Segment

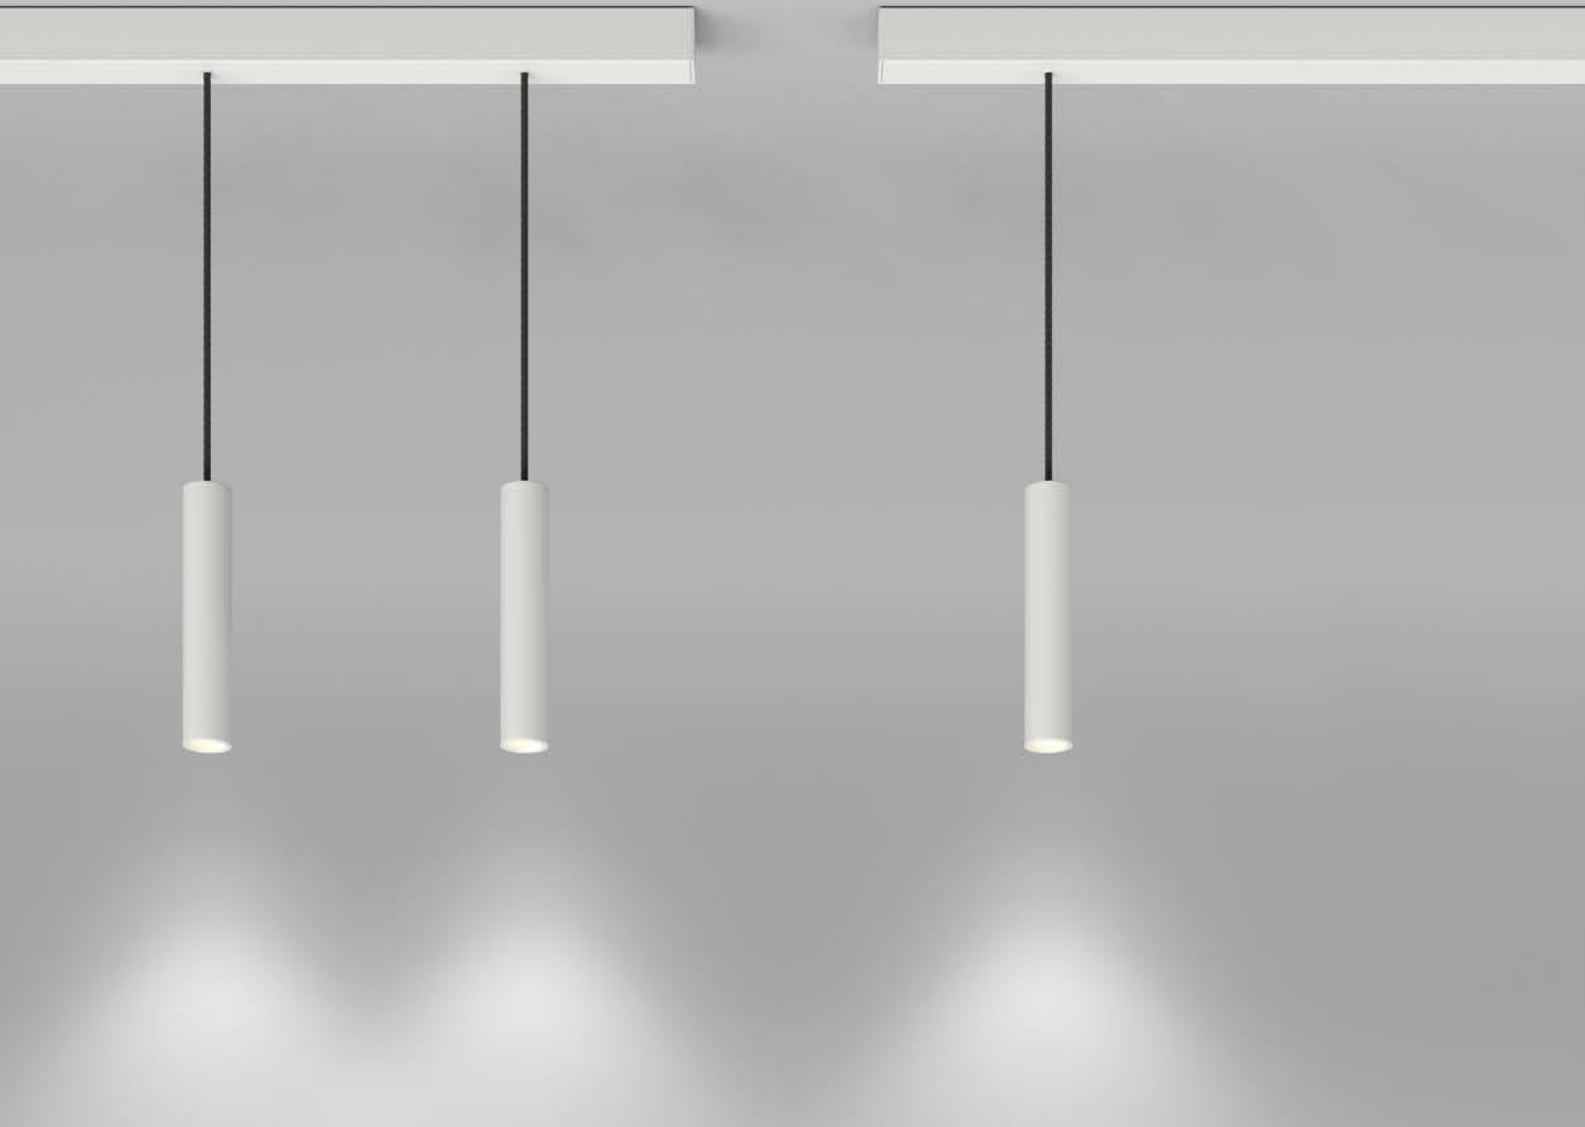

1 PROFILE MOUNTING




surface
pendant
recessed

2 PENDANTS

A 1 pendant
H 2 pendants
E


3 COLOUR



spot
SI
WS
SW
AT

housing &
blank cover
SI
WS
SW
SW

4 LED



2700 K, CRI > 90
3000 K, CRI > 90
4000 K, CRI > 90

5 CONTROL



non-dim
DALI

6 BEAM ANGLE



12°
32°


1
3

P30-1 ZHS 3 N 4 5 6


P30-AZHS2NATSW927X11 surface mounted p.thirty segment, 2 zenit XXS pendants, black tube, aluminium natural transparent spot, black housing & blank cover, 2700 K, CRI > 90, non-dim, 12°, IP 20 (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)



ZENIT XXS | SYSTEMS



12°



32°

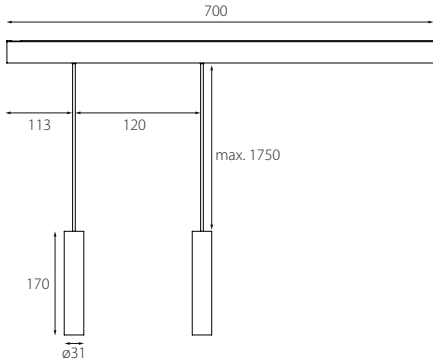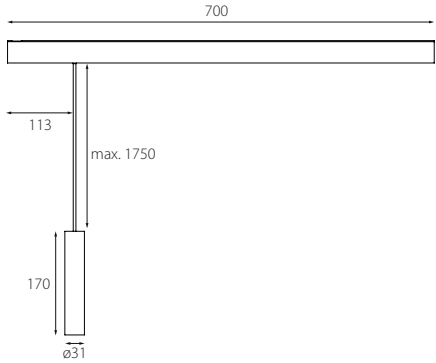


LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°		32°	
	1 pendant (7W)	2 pendants (11,5W)	1 pendant (7W)	2 pendants (11,5W)
LF927 2700 K	183 lm	366 lm	272 lm	544 lm
LF930 3000 K	189 lm	378 lm	280 lm	560 lm
LF940 4000 K	197 lm	394 lm	292 lm	584 lm

WEIGHT

	non-dim	DALI
1 pendant	940 g	960 g
2 pendants	1240 g	1260 g

based on recessed mounted version



Down to UGR ≤ 16 | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit S inset & p.fusion for p.forty & pure 3 systems

Systeme | Downlight Inset p.forty & pure 3
Systems | Downlight Inset p.forty & pure 3
Systèmes | Downlight Inset p.forty & pure 3




1 SPOTS	2 TUBE COLOUR	3 HOUSING COLOUR
1 spot	1 gold	G white
2 spots	2 black	S black
4 BLANK COVER	5 LED	6 OUTPUT
silver	SI 3000 K, CRI > 80	830
white	WS 4000 K, CRI > 80	840
black	SW 2700 K, CRI > 90	927
	3000 K, CRI > 90	930
	3500 K, CRI > 90	935
	4000 K, CRI > 90	940
7 CONTROL	8 BEAM	
non-dim	1 16°	1
DALI	3 23°	2
	4 40°	4

P-Z 1 2 3 4 5 6 7 8

P-Z25-GSW5940H32 2 spots black, tube colour gold, black housing, white blank cover, CRI > 90, 4000K, high output, DALI, 23° (order sample)

➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT S INSET & P.FUSION FOR P.FORTY & PURE 3 SYSTEMS | SYSTEMS

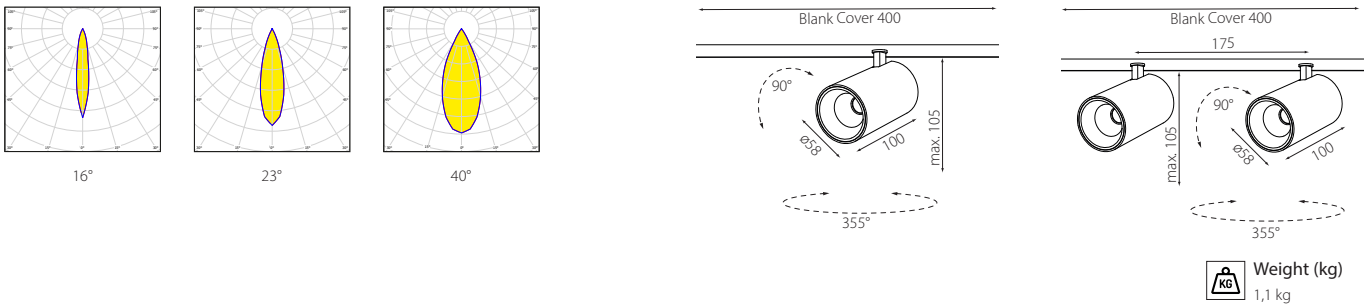

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	low output (7,3 W)						high output (11 W)					
	16°		23°		40°		16°		23°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000 K	820 lm	796 lm	784 lm	761 lm	768 lm	746 lm	1161 lm	1127 lm	1112 lm	1079 lm	1088 lm	1056 lm
LF840 4000 K	859 lm	834 lm	825 lm	801 lm	803 lm	779 lm	1217 lm	1181 lm	1172 lm	1138 lm	1139 lm	1106 lm
LF927 2700 K	644 lm	625 lm	623 lm	605 lm	609 lm	591 lm	913 lm	887 lm	881 lm	855 lm	862 lm	837 lm
LF930 3000 K	672 lm	653 lm	646 lm	627 lm	631 lm	613 lm	933 lm	906 lm	903 lm	877 lm	878 lm	852 lm
LF935 3500 K	704 lm	683 lm	679 lm	659 lm	660 lm	641 lm	987 lm	958 lm	952 lm	924 lm	925 lm	898 lm
LF940 4000 K	713 lm	692 lm	686 lm	666 lm	667 lm	647 lm	988 lm	960 lm	943 lm	916 lm	921 lm	895 lm

* figures per single spot

OPTIONAL ACCESSORY


Honeycomb glare protection	S10-BLE-58
Oval spot lens	S10-OZL-58
Clear protective glass	S10-SGL-58
Blur glass	S10-WGL-58



Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.


P.FUSION FOR P.FORTY & PURE 3 (ONLY FOR SURFACE AND RECESSED - MOUNTED PROFILES (L = 400 MM))

1 QUANTITY	2 BLANK COVER	3 TECHNOLOGY/OUTPUT
1	white	WS High voltage (230V AC) HV
2	black	SW Constant current CC*
	silver	SI *5-30W, 250/400/550/700mA via dip-switch
4 CONTROL		
non-dim	1	
DALI	3	
P-FSN 1 2 3 4		
P-FSN2WSHV1	p.forty fusion, 2 cable grommets, symmetrical, blank cover white, high voltage, non-dim (order sample)	



Down to UGR ≤ 16 | up to 118 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

Systeme | Spotlight Inset pure 3
Systems | *Spotlight Inset pure 3*
Systèmes | *Spotlight Inset pure 3*

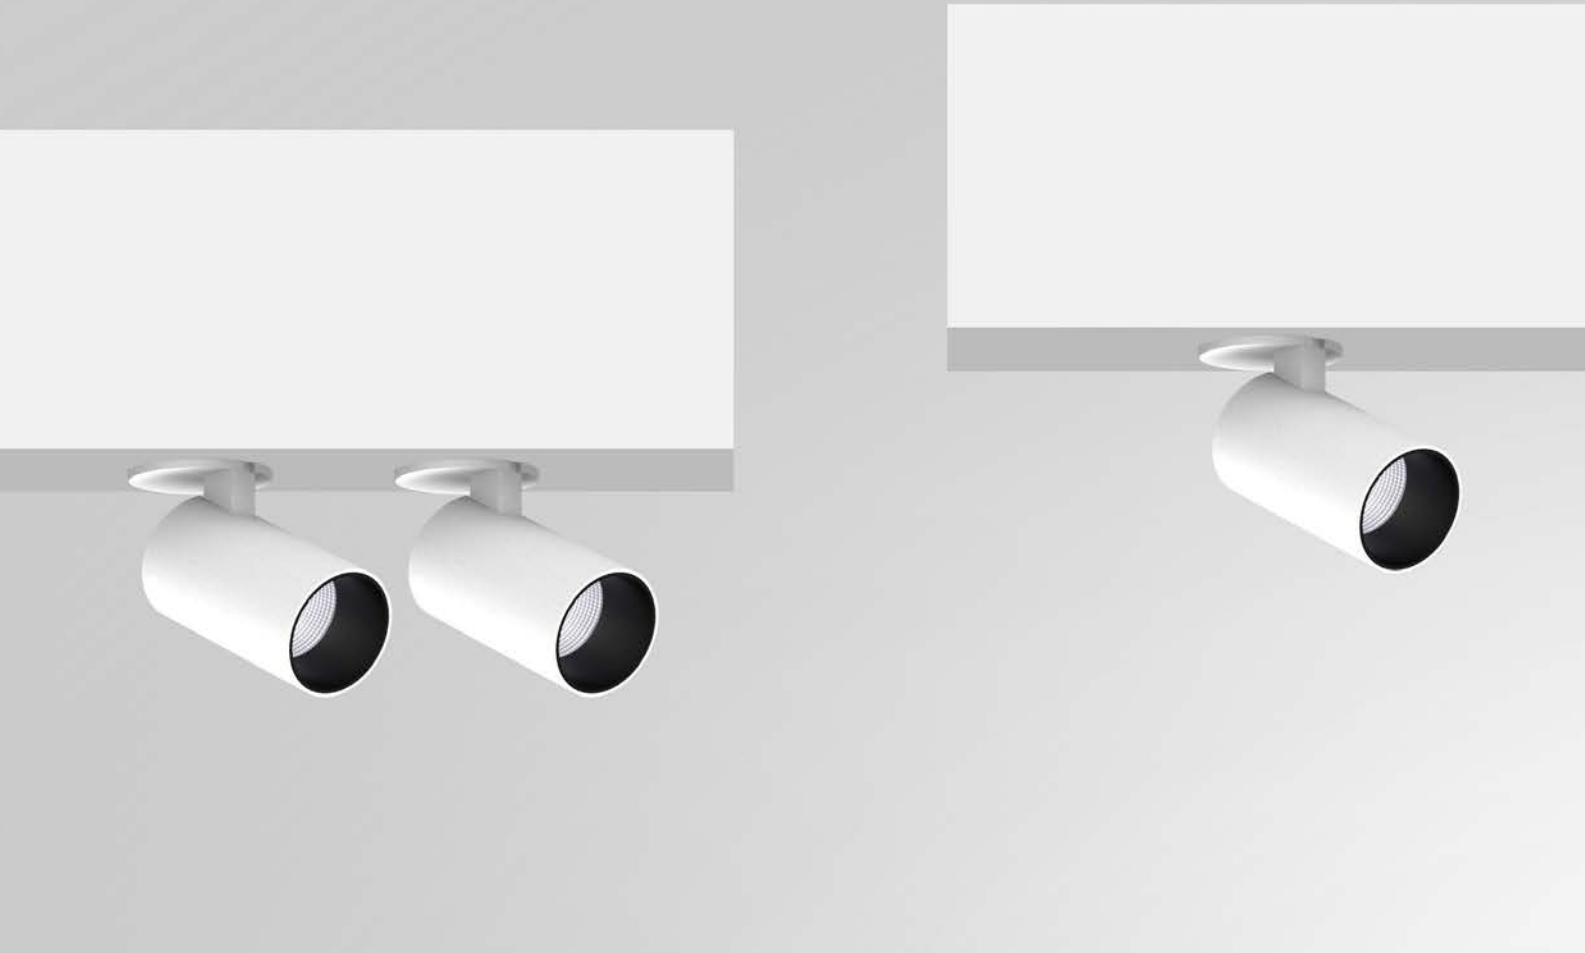

1 SPOTS

- | | |
|---------|----------|
| 1 spot | 1 |
| 2 spots | 2 |

2 TUBE COLOUR

-  gold **G**
-  black **S**

3 HOUSING COLOUR

- white
black

4 BLANK COVER

- | | | |
|---|--------|-----------|
|  | silver | SI |
|  | white | WS |
|  | black | SW |

5 LED

- | | | |
|---|--------------|-----|
|  | LF830 3000 K | 830 |
|  | LF840 4000 K | 840 |
|  | LF927 2700 K | 927 |
|  | LF930 3000 K | 930 |
|  | LF940 4000 K | 940 |

6 CONTROL

- | | | |
|---|---------|---|
|  | non-dim | 1 |
|  | DALI | 3 |

7 BEAM



- | | | |
|---|-----|---|
|  | 24° | 1 |
|  | 40° | 4 |

P33-Z 1 XS- 2 3 4 5 H 6 7

P33-Z2XS-SWWS930H14 2 spots white, tube colour black, white housing, white blank cover, CRI > 90, 3000 K, non-dim, 40°, blind cover pure 3 in white (order sample)

► *Configure online on KATALOG.PLANLICHT.COM*

ZENIT XS INSET FOR PURE 3 SYSTEMS | SYSTEMS

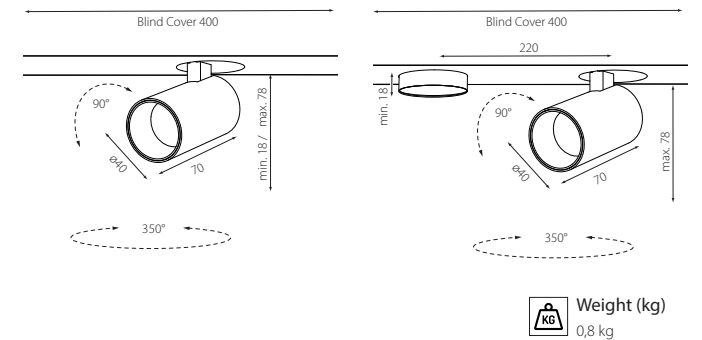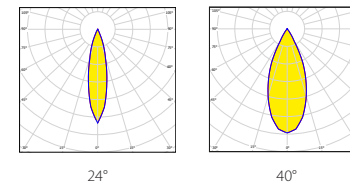

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	24° (7,7W)		40° (7,7W)	
	gold	black	gold	black
LF830 3000 K	507lm	453lm	496lm	443lm
LF840 4000 K	529lm	473lm	518lm	463lm
LF927 2700 K	380lm	340lm	373lm	333lm
LF930 3000 K	404lm	361lm	395lm	353lm
LF940 4000 K	433lm	387lm	423lm	378lm

* figures per single spot

OPTIONAL ACCESSORY

- | | |
|----------------------------|------------|
| Honeycomb glare protection | S10-BLE-40 |
| Oval spot lens | S10-OZL-40 |
| Blur glass | S10-WGL-40 |



Reflektortausch werkzeuglos möglich.
 Passive Kühlung. Komplettschtrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refréoidissement passif. Projecteur complet incluant réflecteur et convertisseur.



Down to UGR ≤ 16 | up to 66 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM




1 TUBE COLOUR	2 HOUSING COLOUR	3 LED
gold black	GDwhite SWblack	WS3000 K, CRI > 80830 SW4000 K, CRI > 80840 2700 K, CRI > 90927 3000 K, CRI > 90930 3500 K, CRI > 90935 4000 K, CRI > 90940
4 OUTPUT	5 CONTROL	6 BEAM
low output (non-dim only) high output	Lnon-dim HDALI Stucchi OneTrack/Global Pulse	116° 223° 440°

S10S100-12C13456

S10S100-GDWSC1940H12 tube colour gold, housing white, IP 20, CRI > 90, 4000K, high output, non-dim, 23° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)

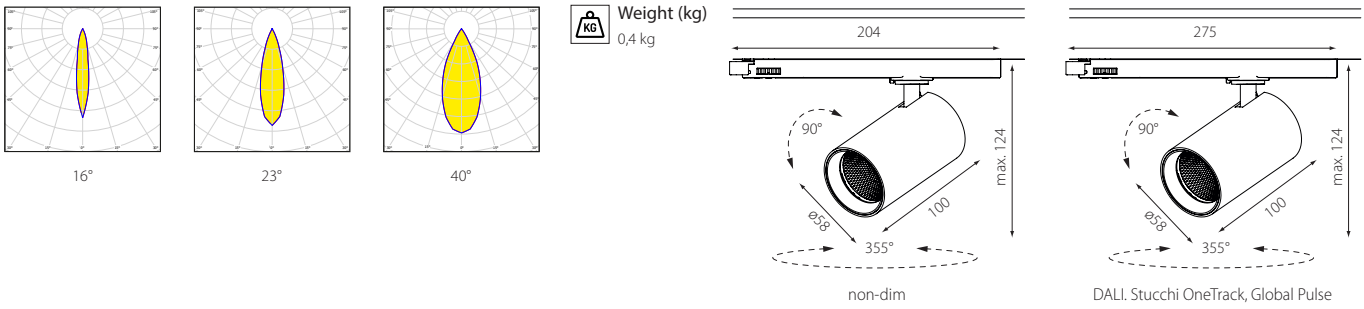

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output (7,3 W)						high output (11 W)					
	16°		23°		40°		16°		23°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000 K	820 lm	796 lm	784 lm	761 lm	768 lm	746 lm	1161 lm	1127 lm	1112 lm	1079 lm	1088 lm	1056 lm
LF840 4000 K	859 lm	834 lm	825 lm	801 lm	803 lm	779 lm	1217 lm	1181 lm	1172 lm	1138 lm	1139 lm	1106 lm
LF927 2700 K	644 lm	625 lm	623 lm	605 lm	609 lm	591 lm	913 lm	887 lm	881 lm	855 lm	862 lm	837 lm
LF930 3000 K	672 lm	653 lm	646 lm	627 lm	631 lm	613 lm	933 lm	906 lm	903 lm	877 lm	878 lm	852 lm
LF935 3500 K	704 lm	683 lm	679 lm	659 lm	660 lm	641 lm	987 lm	958 lm	952 lm	924 lm	925 lm	898 lm
LF940 4000 K	713 lm	692 lm	686 lm	666 lm	667 lm	647 lm	988 lm	960 lm	943 lm	916 lm	921 lm	895 lm

OPTIONAL ACCESSORY


Blendschutz-Wabenraster <i>Honeycomb glare protection</i> <i>Filtre anti-éblouissement nid d'abeilles</i>	S10-BLE-58
Ovalzeichnerlinse <i>Refractor for elliptical distribution</i> <i>Lentille ovalisante</i>	S10-OZL-58
Klares Schutzglas <i>Clear protective glass</i> <i>Verre de protection transparent</i>	S10-SGL-58
Weichzeichnerglas <i>Diffuser protection glass</i> <i>Verre effet flou</i>	S10-WGL-58



up to 118 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI

zenit N

3-Phasen-Strahler
3-Phase spot light
Projecteur à 3 phases

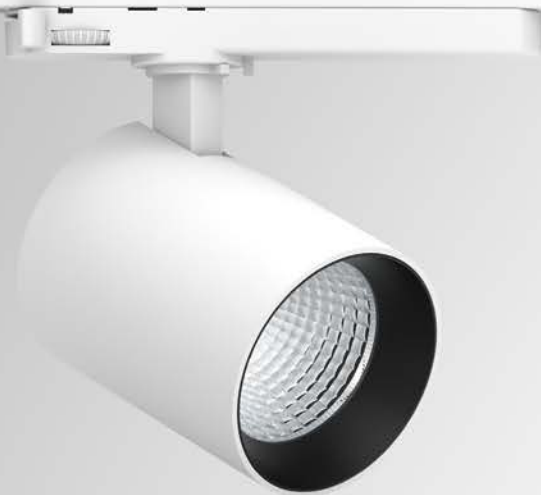



1 HOUSING COLOUR			2 LED		
	white	WS	3000 K, CRI > 90	930	
	black	SW	4000 K, CRI > 90	940	

S10S104-SW1C12H14

S10S104-SWWSC1940H14 tube colour black, housing white, IP 20, CRI > 90, 4000K, high output, non-dim, beam angle 40° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT N | TRACK

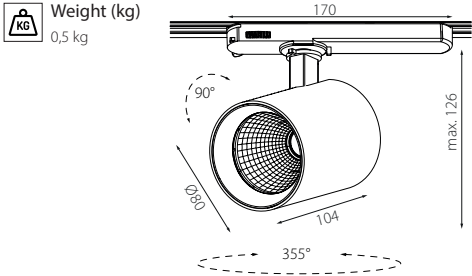

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	high output (27W)
	40°
LF930 3000 K	2680 lm
LF940 4000 K	2821 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster <i>Honeycomb glare protection</i> <i>Filtre anti-éblouissement nid d'abeilles</i>	S10-BLE-80
Ovalzeichnerlinse <i>Refractor for elliptical distribution</i> <i>Lentille ovalisante</i>	S10-OZL-80
Klares Schutzglas <i>Clear protective glass</i> <i>Verre de protection transparent</i>	S10-SGL-80
Weichzeichnerglass <i>Diffuser protection glass</i> <i>Verre effet flou</i>	S10-WGL-80



up to 104lm/W | IEC 62471: Blue light hazard: RG ≤ 1

zenit M

3-Phasen-Strahler
3-Phase spot light
Projecteur à 3 phases



1 TUBE COLOUR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & Vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output
- extra high output (not DALI Eutrac)

5 CONTROL

- L non-dim
- M DALI Eutrac
- H DALI, Stucchi OneTrack/Global Pulse
- V
- E

6 BEAM


- 1 23° 2
- 3 40° 4
- G 60° 6

S10S200-1 2 C1 3 4 5 6


S10S200-GGWSC1FLEM34 tube colour high-gloss gold, housing white, special LED meat, medium output, DALI Eutrac, 40° (order sample)

➤ Configure online on KATALOG.PLANLICHT.COM

ZENIT M | TRACK

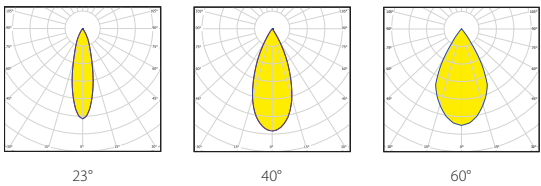

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

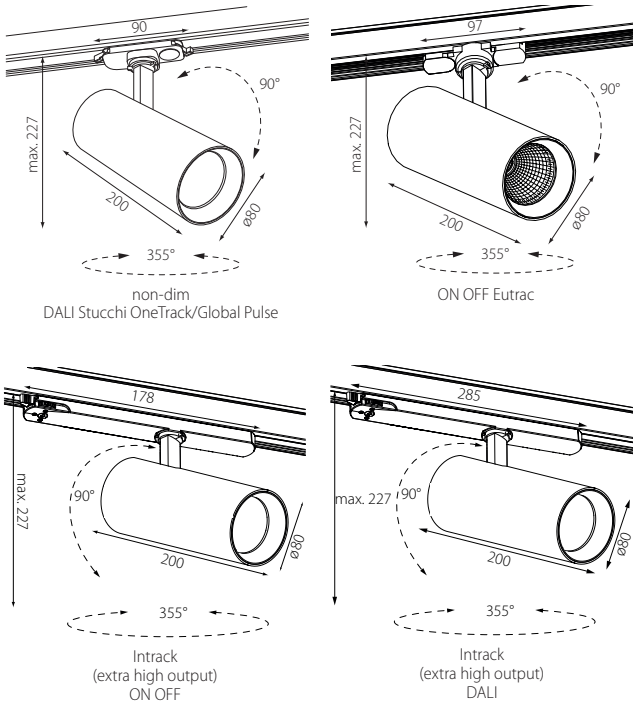

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 10 - 10,5W			medium output / 12 - 12,5W			high output / 17 - 18,5W			very high output / 23 - 25W			extra high output / 39 - 41W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm	4563 lm	4572 lm	4332 lm
LF840 4000K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm	4696 lm	4704 lm	4458 lm
LF927 2700K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm	3575 lm	3581 lm	3393 lm
LF930 3000K	1231 lm	1233 lm	1169 lm	1459 lm	1462 lm	1385 lm	2109 lm	2113 lm	2002 lm	2706 lm	2711 lm	2569 lm	4519 lm	4527 lm	4290 lm
LF935 3500K	1265 lm	1267 lm	1201 lm	1499 lm	1502 lm	1423 lm	2167 lm	2171 lm	2057 lm	2780 lm	2785 lm	2639 lm	4643 lm	4651 lm	4407 lm
LF940 4000K	1297 lm	1299 lm	1231 lm	1538 lm	1541 lm	1460 lm	2222 lm	2227 lm	2110 lm	2851 lm	2856 lm	2706 lm	4761 lm	4770 lm	4520 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm	3444 lm	3410 lm	3244 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm	2309 lm	2286 lm	2175 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm	3255 lm	3223 lm	3066 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm	2240 lm	2218 lm	2110 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm	3618 lm	3582 lm	3408 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm	3255 lm	3223 lm	3066 lm


OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglass Diffuser protection glass Verre effet flou	S10-WGL-80



Down to UGR ≤ 16 | up to 129 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI

COLOUR CHARTS | HOUSING & CABLES



Optionale Ausführung | *Optional version:*

1750mm
5x0,75 mm²

 white	*-EIN-WHITE
 black	*-EIN-BLACK
 red	*-EIN-RED
 iron	*-EIN-IRON
 gold	*-EIN-GOLD
 silver	*-EIN-SILVER




RAL OF YOUR CHOICE | OPTIONAL HOUSING COLOURS



Capital
COPPER

Glaring GOLD

FARBKARTEN | RASTER, MASKEN & TUBI
COLOUR CHARTS | LOUVRES, MASKS & TUBES

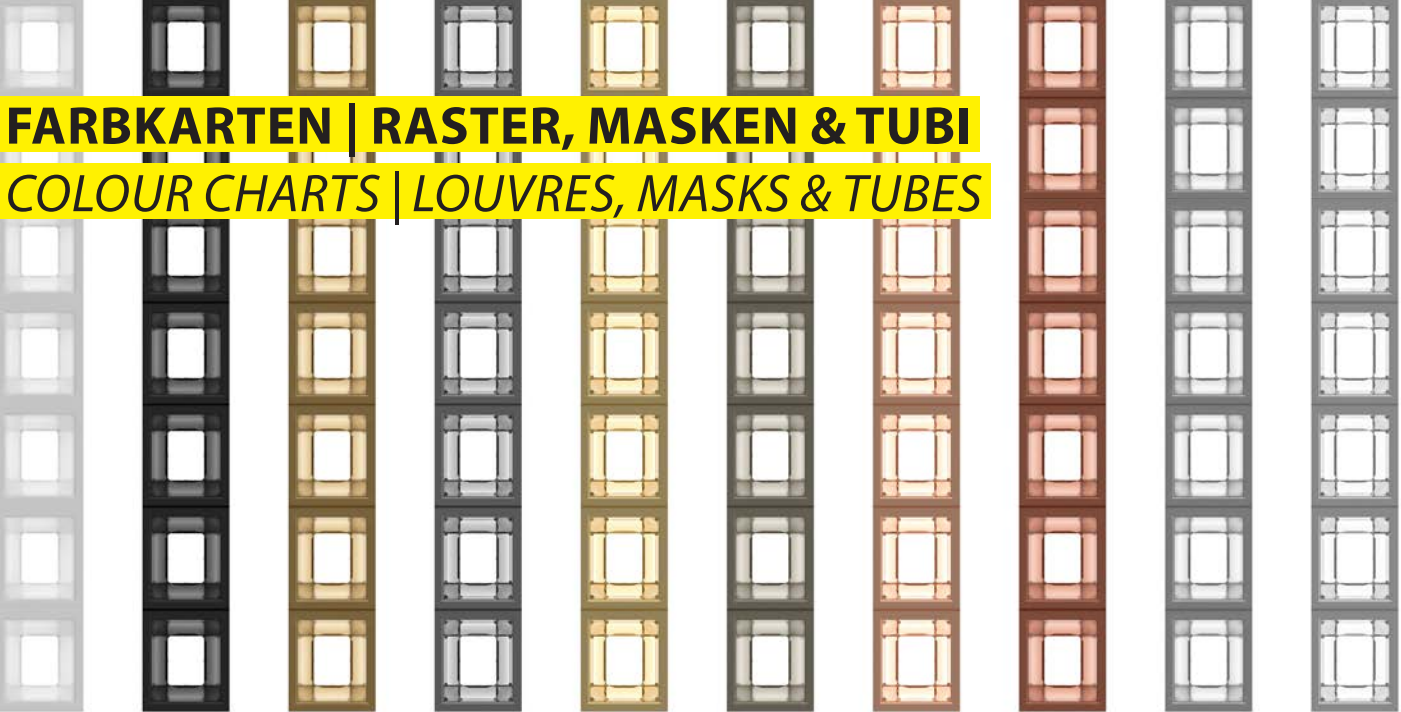

white 9019 black 9005 glaring gold high-gloss black chrome high-gloss gold gunnery grey high-gloss copper capital copper silver matte high-gloss silver



NOTES

A large grid area for taking notes, consisting of 20 columns and 30 rows of small squares.

WICHTIGE HINWEISE

Dieser Katalog richtet sich ausschliesslich an gewerbliche Kunden. Die in diesem Katalog angegebenen Werte sind Bemessungswerte und unterliegen produktionsbedingten Toleranzen *. Alle angeführten Angaben – insbesondere Grössen-, Material-, Farb- und technische Angaben – entsprechen dem Stand zum Zeitpunkt des Drucks und dienen ausschliesslich zur Information. Der Herausgeber haftet nicht für Satz- und Druckfehler sowie für Abweichungen der Produkte von Abbildungen und Angaben. PLANLICHT behält sich vor, jederzeit ohne Ankündigung Änderungen an Produkten vor zu nehmen. Es gelten die Allgemeinen Geschäftsbedingungen der planlicht GmbH & Co KG, die unter WWW.PLANLICHT.COM/AGB-LANDING/ eingesehen werden können.

Technische Kennzahlen, angeführte Werte und die Piktogrammeleiste betreffen zumindest einen aber nicht zwingend alle Artikel der jeweiligen Leuchtenfamilie, exakte Angaben je Artikel finden Sie im Online-Katalog bzw. in PLANLICHT-Verkaufsbelegen und Datenblättern.

WEEE-Reg.-Nr. DE 54728470

* Leistung, Lichtstrom und Farbtemperatur unterliegen durch den Einsatz von elektronischen Bauteilen produktionsbedingten Toleranzen.
Toleranzen Leistung und Lichtstrom: +/- 10%. Toleranz Farbtemperatur: +/- 150 K. Lichtstrom dynamisch weiss bei 2700 K.

IMPORTANT REMARKS

*This catalogue is reserved for professionals only. The values published in this catalogue are rated values, which can slightly change for reasons related to the production process *. The published data such as dimensions, materials, colours and technical data are valid at time of printing, and exclusively provided for informational purposes. The editor takes no responsibility for typographical and print errors, as well as for any differences in the products, pictures and data. PLANLICHT reserves the right to change the products at any time and without any notice. The Terms and Conditions of planlicht GmbH & Co KG (available on WWW.PLANLICHT.COM/AGB-LANDING/) shall apply.*

Key technical specifications, listed values as well as the pictogram bar relate to at least one but not necessarily all items of the respective luminaire family, exact details for each item can be found in the online web catalogue or in PLANLICHT sales documents and data sheets.

* The power output, luminous flux and colour temperature can be slightly different due to specific electronic components used in the manufacturing process. The power output and luminous flux can differ by +/- 10%. The colour temperature can differ by +/- 150 K. Luminous flux dynamic white at 2700 K.



Allgemeine Geschäfts- und Lieferbedingungen
General Terms and Conditions
Conditions générales de vente et de livraison

REMARQUES IMPORTANTES

*Ce catalogue est exclusivement destiné aux professionnels. Les valeurs publiées dans ce catalogue sont des valeurs calculées, pouvant légèrement changer pour des raisons liées au processus de fabrication *. Les données techniques et autres informations (dimensions, matériaux, couleurs...) sont celles applicables au moment de l'impression du catalogue, et uniquement fournies à titre informatif. L'éditeur décline toute responsabilité en cas d'erreur de frappe, d'impression et pour tout autre différence concernant les produits, images et données publiées. PLANLICHT se réserve le droit de modifier les produits à sa discrétion, à tout moment et sans préavis. Les conditions générales de vente de planlicht GmbH & Co KG applicables sont consultables sur WWW.PLANLICHT.COM/AGB-LANDING/.*

Les caractéristiques techniques, les valeurs indiquées et la barre de pictogrammes concernent au moins un article de la famille de luminaires concernée, mais pas nécessairement tous. Vous trouverez des informations exactes par article dans le catalogue en ligne ou dans les documents de vente et les fiches techniques de PLANLICHT.

* La puissance, le flux lumineux et la température de couleur peuvent légèrement différer en raison de l'utilisation de composants électroniques spécifiques dans le processus de production. La puissance et le flux lumineux peuvent différer de +/- 10 %. La température de couleur peut différer de +/- 150 K. Flux lumineux blanc dynamique à 2700 K.

Webseite
Website
Site web



6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com
WWW.PLANLICHT.COM

IMPRINT

Publisher: planlicht GmbH & Co. KG, Vomp
Creative Concept: Katrin Atzinger
Graphic Design: Beatrice Praxmarer, Christoph Höflinger
© 2025

