


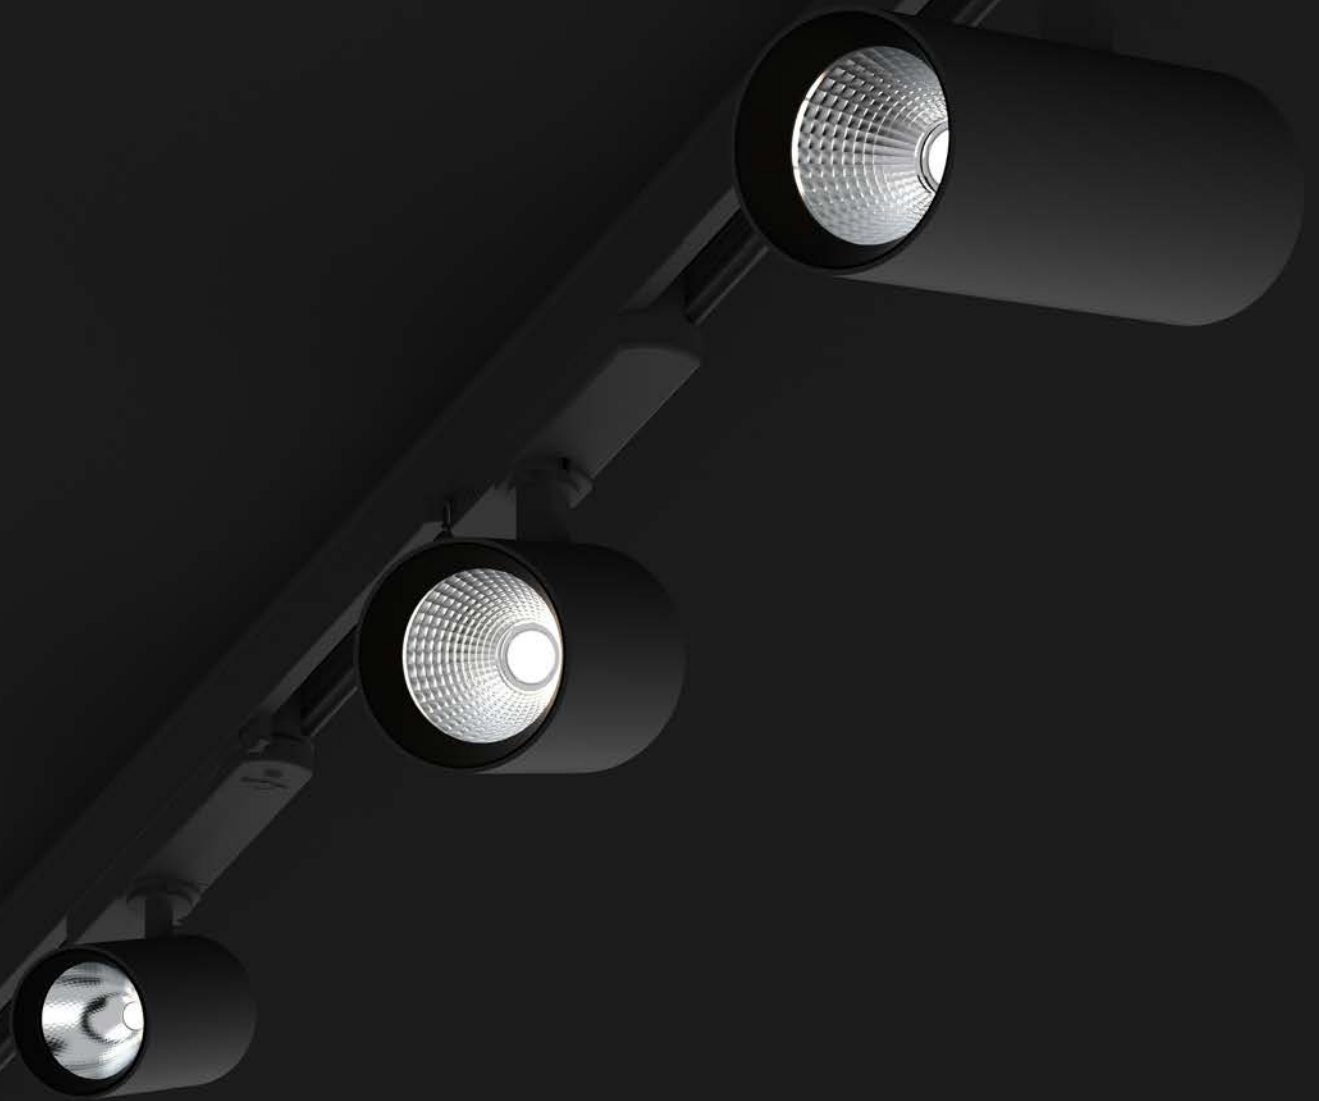


zenit


zenit

DESIGNER'S


SPOTLIGHT FAMILY



Surface




Pendant



Recessed



Systems



Track



ZENIT - DESIGNER'S SPOTLIGHT FAMILY

Inspiration



ZENIT FEATURES



ENERGIEEFFIZIENZ

Die Leuchte liefert eine sehr hohe Lichtleistung bei geringem Stromverbrauch.

Energy efficiency
Haute puissance lumineuse



DREHBAR

Das Spotlight kann individuell eingestellt werden: Drehung bis zu 355°

Swivelling
Tournant



SCHWENKBAR

Optimale Beleuchtung: bis zu 90° schwenkbar

Tilt
Pivotant



SPEZIELLE LICHTFARBEN

Spezielle LED-Versionen erhältlich für Retail-Beleuchtungen.

Special light colours
Couleurs de la lumière spéciales

SPEZIELLE OPTIKEN

Wählen Sie aus verschiedenen Reflektoren, Linsen, einschließlich der Wabenraster.

Special optics
Optiques spéciales



INSETS FÜR PROFILSYSTEME

zenit ist auch für pure 3, p.forty, p.thirty und p.bright verfügbar.

Insets for profile systems
Inserts pour systèmes de profilé



INTEGRIERTES BETRIEBSGERÄT

Elegante & minimalistische Optik durch verbautes Betriebsgerät.

Driver integrated
Ballast intégré



INDIVIDUELLE FARBEN

Die Gehäuse, Einsätze und Stromkabel sind in verschiedenen Farben erhältlich.

Individual colours
Couleurs de corps individuelles



ZENIT XXS



VERSCHIEDENE MONTAGEARTEN FÜR ZENIT M



UNTERSCHIEDLICHE GRÖSSEN



ZENIT XXS



ZENIT XXS | ENDLOSE VIELFALT, ELEGANTE LEICHTIGKEIT

Die zenit-Familie darf sich über Verstärkung freuen – mit den zenit XXS-Spots präsentiert PLANLICHT den bisher kleinsten zenit-Spot mit einem Durchmesser von nur 31 mm. Dieses winzige Kraftpaket bietet eine bemerkenswerte Vielseitigkeit und ermöglicht die ideale Raumbelichtung:

Farben: zenit XXS ist nicht nur leistungsstark, sondern auch ästhetisch ansprechend und in drei verschiedenen Standard-Farboptionen erhältlich: Schwarz, Weiß und Silber (jeweils mit schwarzem Tubus). Zudem kann durch „RAL nach Wahl“ auch jede beliebige Wunschfarbe zum Einsatz kommen.

Ausstrahlwinkel: Dank der hochwertigen asphärischen Glaslinse wird das perfekte Licht garantiert und die Wahl zwischen engem und breitem Strahlungswinkel bietet zudem die Möglichkeit der individuellen Raumbelichtung.

ZENIT XXS | ENDLESS VARIETY, ELEGANT LIGHTNESS!

The zenit family welcomes a new addition – with the zenit XXS, PLANLICHT introduces the smallest zenit spotlight to date with a diameter of only 31 mm. This tiny powerhouse offers remarkable versatility, enabling perfect illumination of every corner of the room:

Colours: zenit XXS is not only powerful but also aesthetically pleasing, available in three different standard colour options: black, white and silver, as well as RAL colours of your choice (tube colour black).

Beam Angle: Thanks to the high-quality aspherical glass lens, perfect light is guaranteed, and the choice between narrow and wide beam angles allows for individual room lighting options.

AUSFÜHRUNGEN:

Hängeleuchten: Hängeleuchte Balken mit 2 oder 4 Pendants sowie Hängeleuchte rund mit 1, 3 oder 5 Pendants

Einbauleuchte: Ein variabler Spot auf einem runden Baldachin

Segment: Segment für p.thirty-Profilserie mit 1 – 5 Spots sowie mit 1 oder 2 Pendants

Inset: Inset für Profilleuchten p.bright, pure 3 und p.forty mit 1 oder 2 Spots sowie 1 oder 2 Pendants

Die unendlichen Möglichkeiten der zenit-Familie mit den neuen zenit XXS Spots – für eine Beleuchtung, die nicht nur funktional, sondern auch ästhetisch ansprechend ist.

VARIANTS:




Pendant: Pendant bar suspension light with 2 or 4 pendants and round pendant with 1, 3, or 5 pendants

Recessed luminaire: A variable spotlight on a round canopy.

Segment: Segment for p.thirty profile series with 1 – 5 spots with 1 or 2 pendants

Inset: Inset for profile luminaires p.bright, pure 3 and p.forty with 1 or 2 spots and 1 or 2 pendants

Explore the endless possibilities of the zenit family with the new zenit XXS spots – for lighting that is not only functional but also aesthetically pleasing.

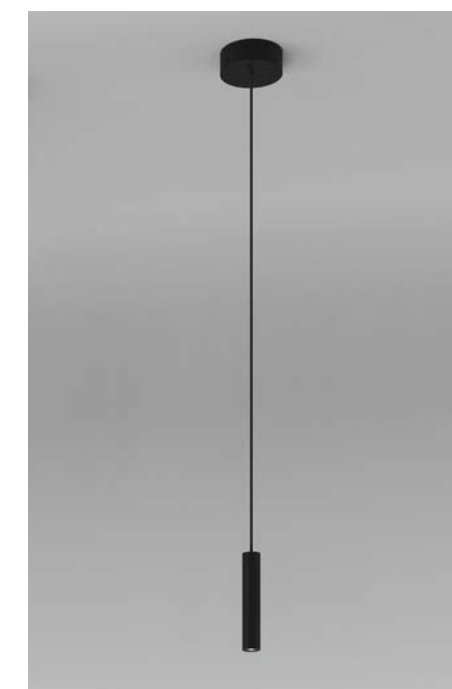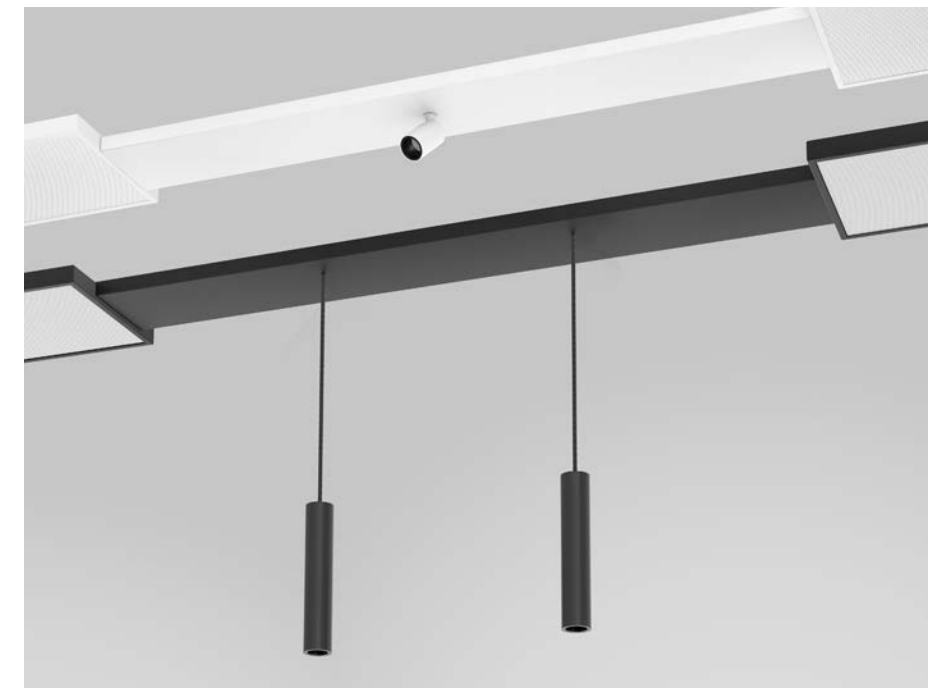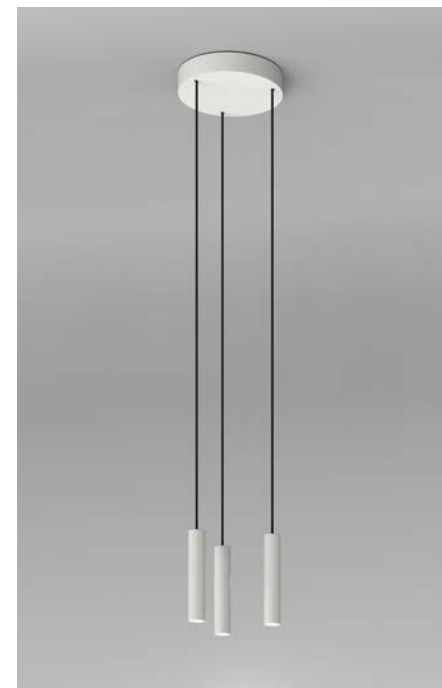

ZENIT M



zenit M variable mit Aufbau-Baldachin | *with surface baldachin*

zenit M low to very high output
with universal adapter



zenit M Einbaustrahler | *recessed mounted*
fixed version



zenit M Einbaustrahler | *recessed mounted*
swivelling version

TUBUSFARBEN | **TUBE COLOURS**

zenit M hängender Aufbaustrahler | *suspended downlight*



zenit M extra high output
with intrack adapter



zenit M Einbaustrahler | *recessed mounted*
flip version



zenit M Aufbaustrahler | *surface mounted downlight*




black matte (SW)	
high-gloss silver (BB)	
silver matte (PP)	
high-gloss black chrome (ZZ)	
high-gloss copper (KK)	
capital copper (RR)	
high-gloss gold (GG)	
glaring gold (DD)	
gunnery grey (YY)	

ZENIT M
ONE SPOTLIGHT, SO MANY OPTIONS!

VERFÜGBAR FÜR ZENIT M & N+
AVAILABLE FOR ZENIT M & N+

ZENIT PROJEKTE

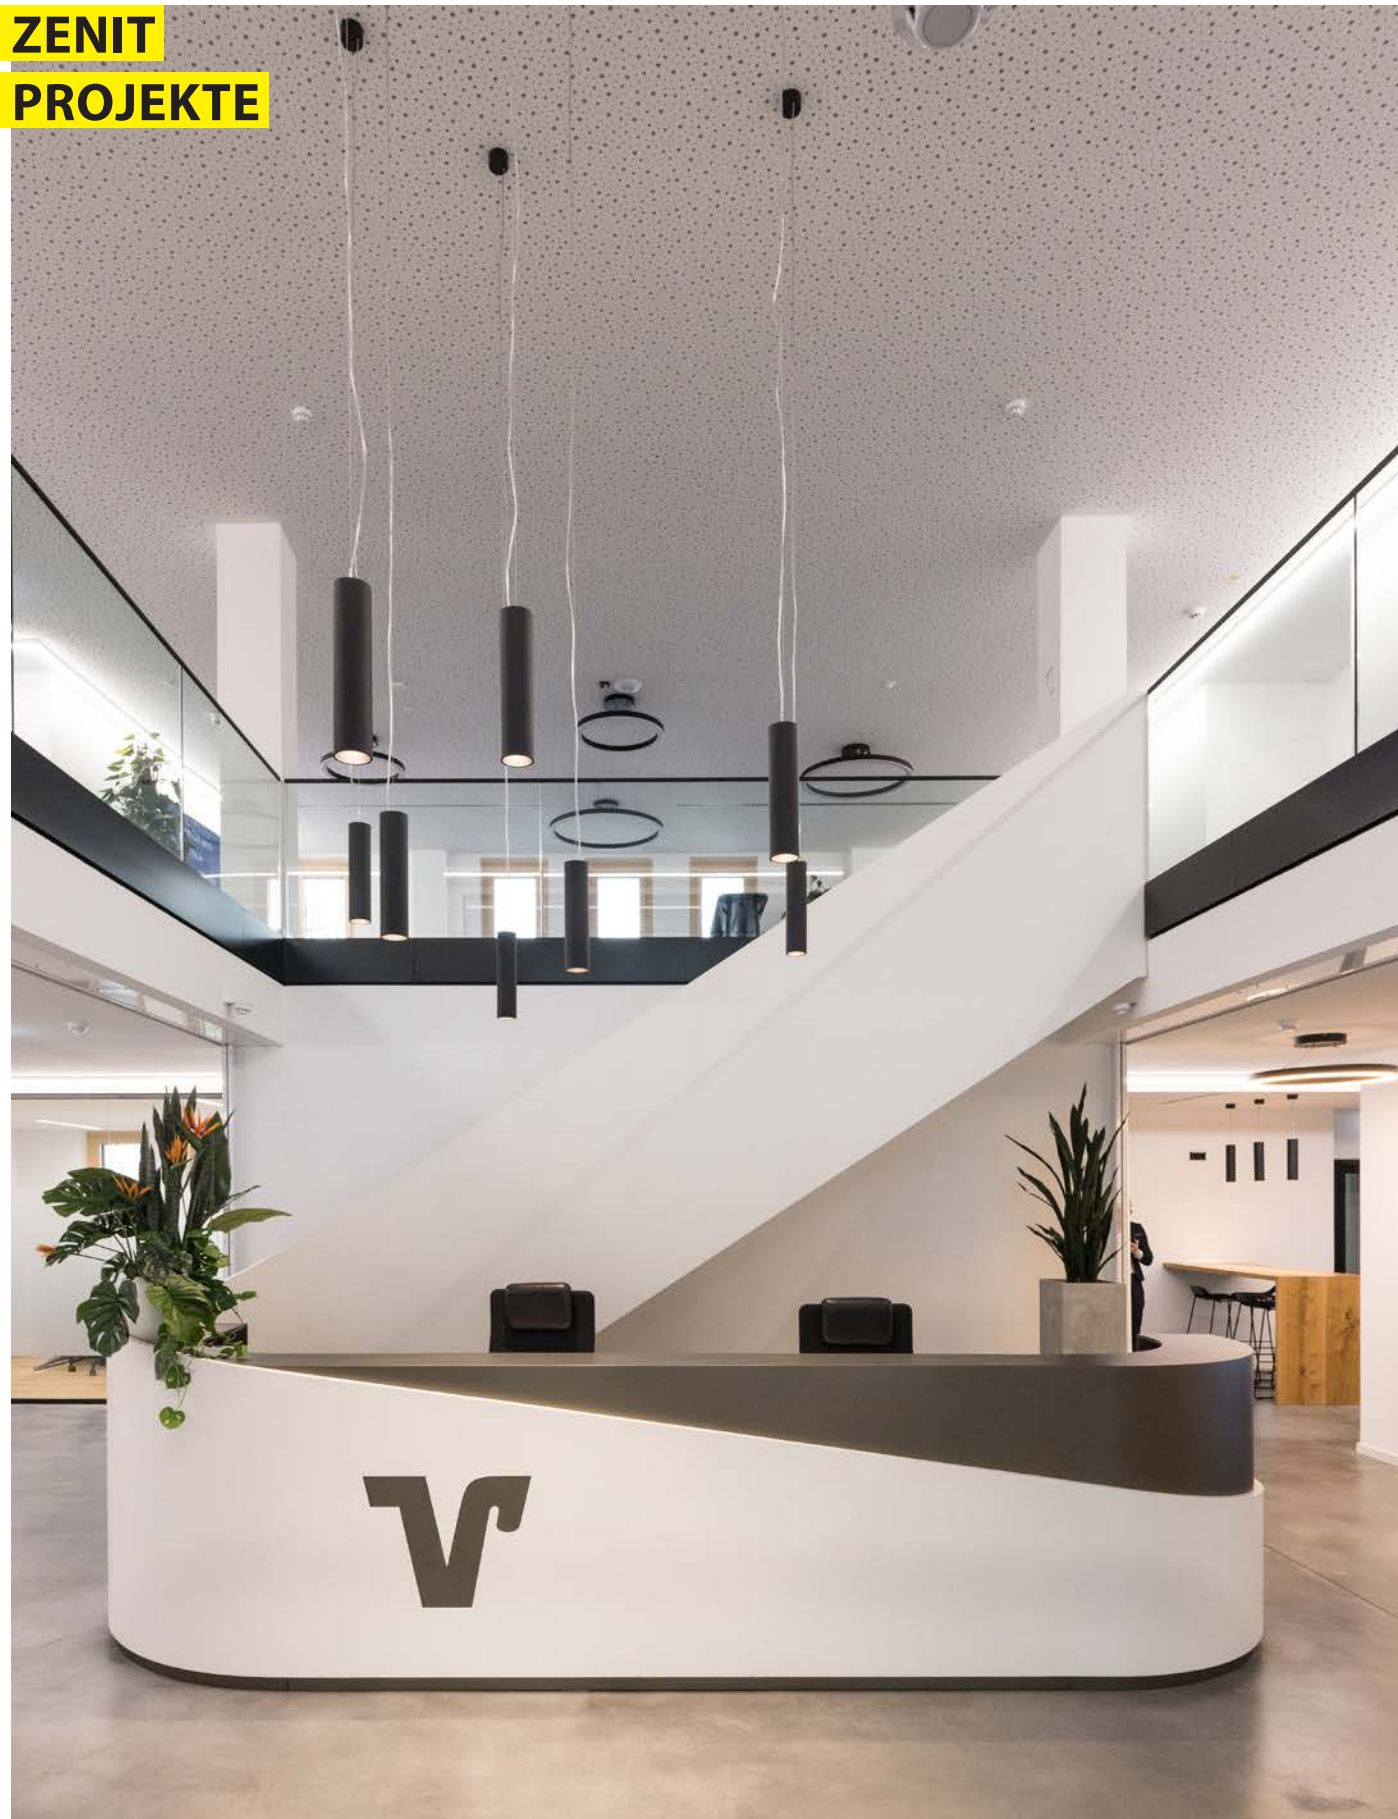



RAIBA STRAUBING | DEUTSCHLAND

Produkte: zenit M, sinus
Foto: © Ulrich Buha



WEARE SOLUTIONS OY | FINNLAND

Produkte: zenit S inset, anto+ inset, p.forty
Foto: © Anders Portman

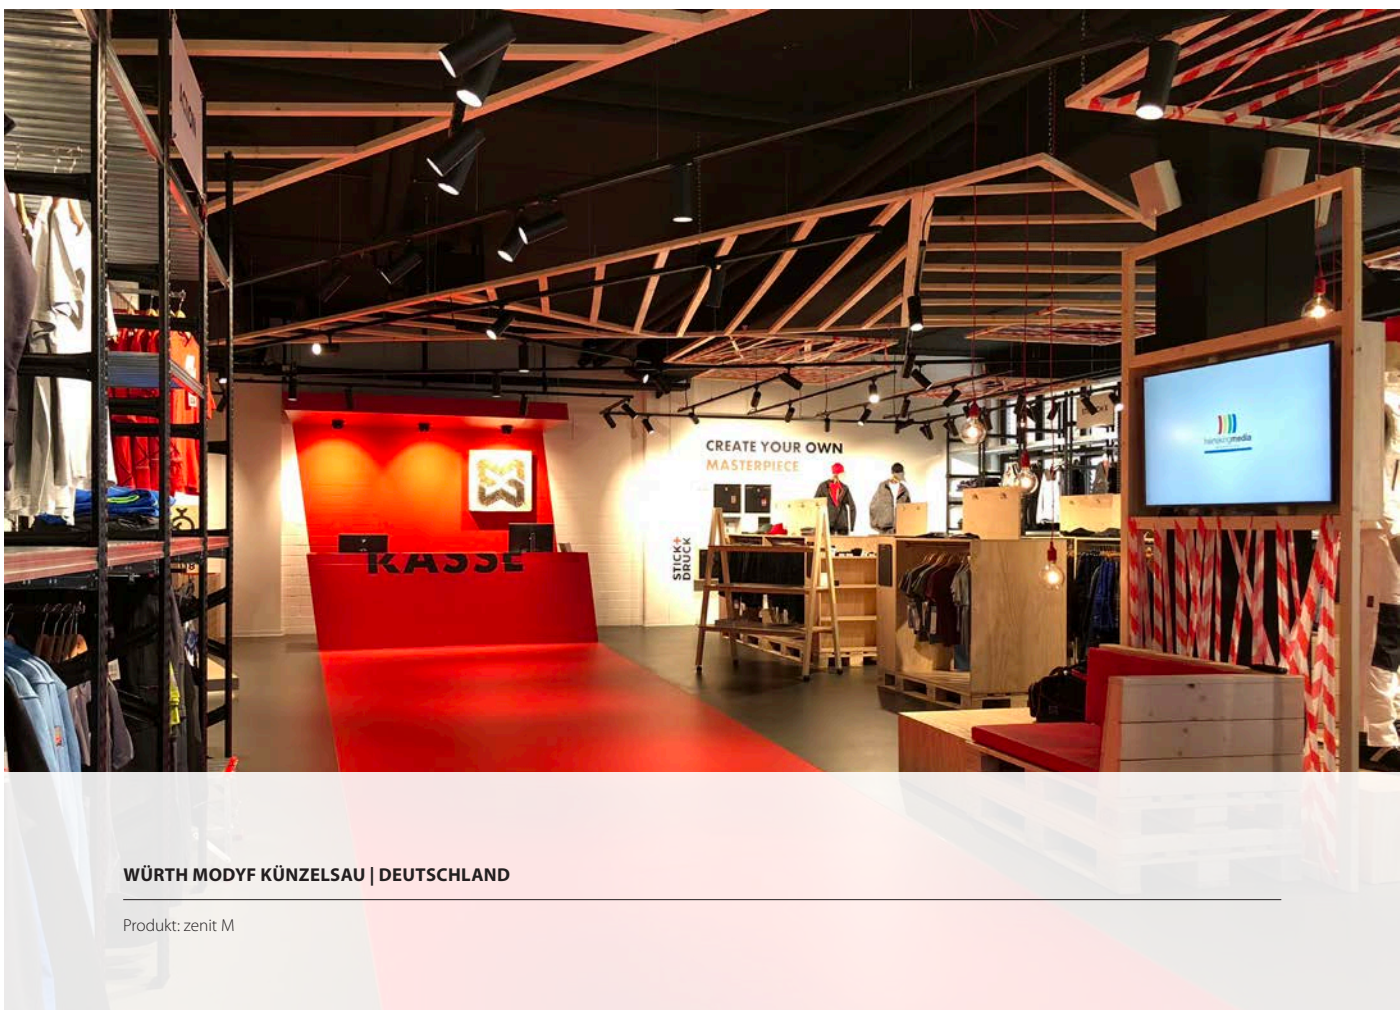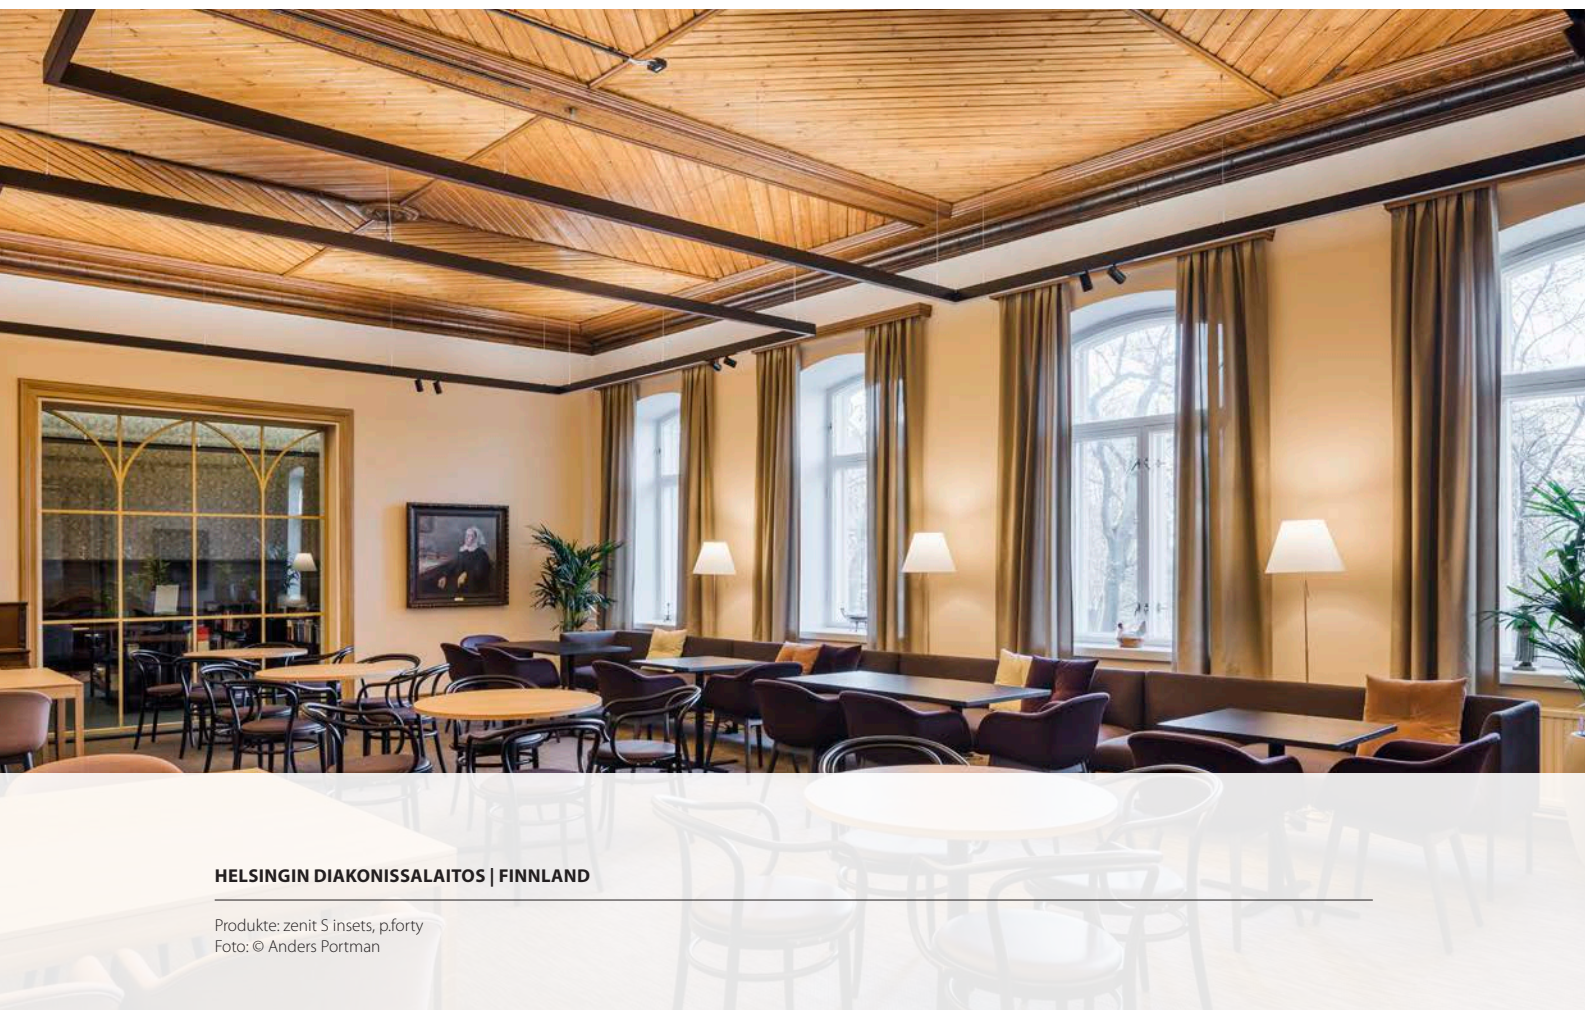

zenit M

Aufbaustrahler
Surface luminaire
Spot en saillie



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- ☛ 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V


6 REFLECTOR

- 23° 2
- 40° 4
- 60° 6


S10A200-12C13456

S10A200-GGWSC1FLEM34 surface-mount, tube high-gloss gold, housing white, IP20, special LED „meat“, medium output, DALI, 40° (order sample) ➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT M | SURFACE

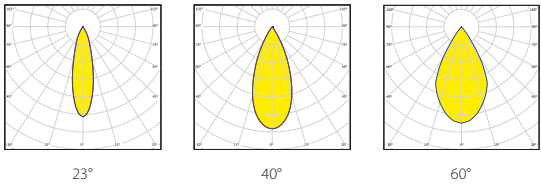

Weight (kg)
0,9 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 9,4 - 11 W			medium output / 11,5 - 12 W			high output / 16,5 - 17,5 W			very high output / 23 - 25 W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster <i>Honeycomb glare protection</i> <i>Filtre anti-éblouissement nid d'abeilles</i>	S10-BLE-80
Ovalzeichnerlinse <i>Refractor for elliptical distribution</i> <i>Lentille ovalisante</i>	S10-OZL-80
Klares Schutzglas <i>Clear protective glass</i> <i>Verre de protection transparent</i>	S10-SGL-80
Weichzeichnerglas <i>Diffuser protection glass</i> <i>Weichzeichnerglas</i> <i>Verre effet flou</i>	S10-WGL-80

Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 133 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switch DIM

zenit M variable

Aufbaustrahler
Surface luminaire
Spot en saillie



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V

6 REFLECTOR


- 23° 2
- 40° 4
- 60° 6

S10B200-12C13456


S10B200-GGWSC1FLEM34 surface mount variable, tube high-gloss gold, housing white, IP20, special LED „meat“, medium output, DALI, 40° (order sample)

► Configure online on KATALOG.PLANLICHT.COM

ZENIT M | SURFACE

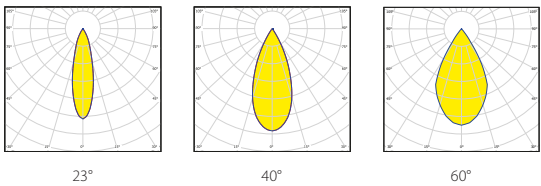

Weight (kg)
1,1 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 9,4 - 11 W			medium output / 11,5 - 12 W			high output / 16,5 - 17,5 W			very high output / 23 - 25 W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 133 lm / W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switch DIM

zenit XXS

Hängeleuchte
Pendant luminaire
Suspension

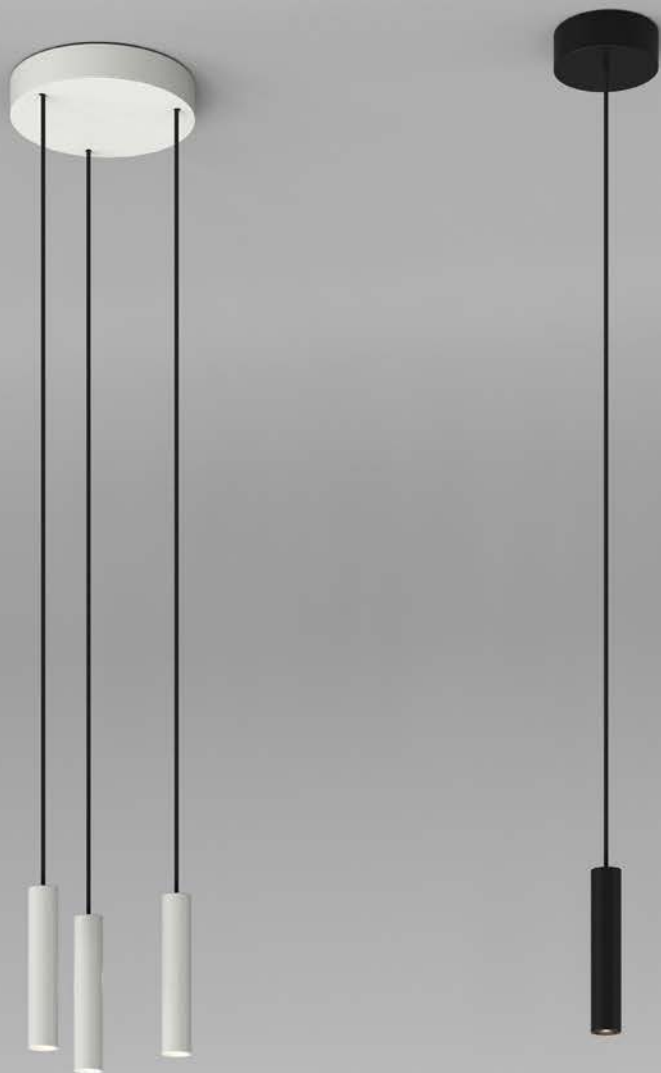


1 CANOPY	2 COLOUR	3 PENDANTS
Built-in canopy round, small (1 tube only)	E M R lighting body canopy SI WS SW 12° 32° Weight (kg) 0,5 kg 0,7 kg 2,1 kg	1 (M/E only)
Canopy round, small (1 tube only)		3 (R only)
Canopy round, medium (3 tube only)		
4 LED	5 CONTROL	6 BEAM
2700 K, CRI > 90	non dim	12°
3000 K, CRI > 90	DALI	32°
4000 K, CRI > 90		

S10H171-N-2C34X56

S10H17R-NSIPC3927X11 pendant, lighting body 170 mm, surface-mount canopy, medium, 3 pendants, tube colour black, lighting body colour silver, surface-mount housing silver, IP20, 3 equal body lengths, CRI > 90, 2700 K, non dim, beam angle 12° (order sample)


➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS | PENDANT

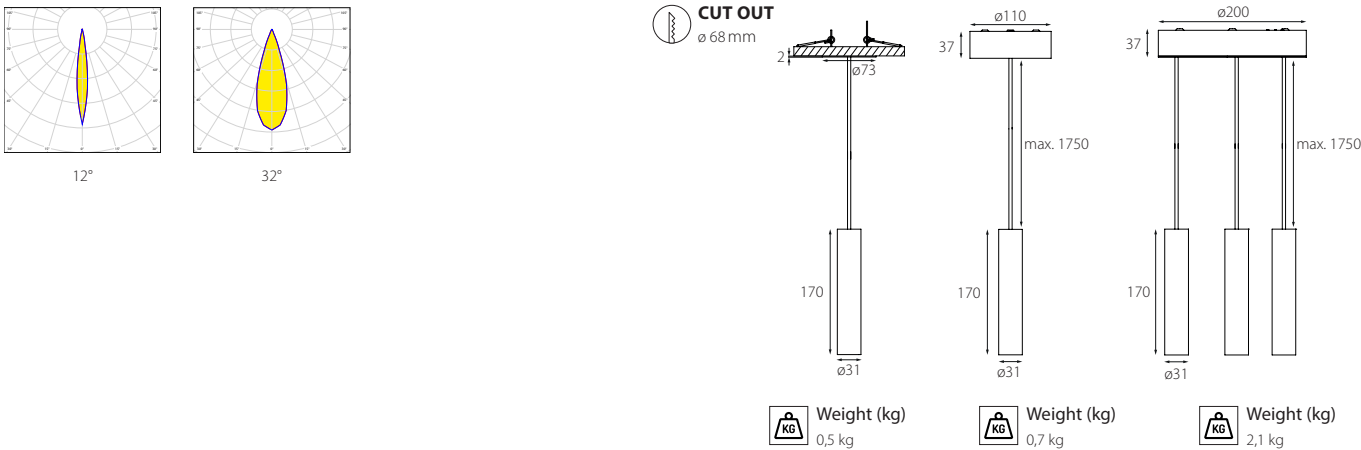

LUMINOUS FLUX (LM) / SYSTEM POWER (W)



	12°		32°	
	1 spot (7 W)	3 spots (16,5 W)	1 spot (7 W)	3 spots (16,5 W)
LF927 2700 K	183 lm	549 lm	272 lm	816 lm
LF930 3000 K	189 lm	567 lm	280 lm	840 lm
LF940 4000 K	197 lm	591 lm	292 lm	876 lm



Down to UGR ≤ 16 | up to 53 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XXS

Hängeleuchte
Pendant luminaire
Suspension

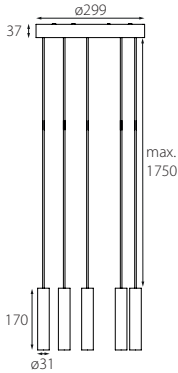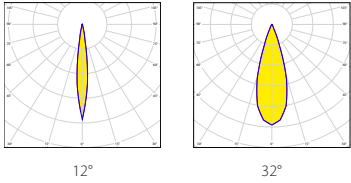

Weight (kg)
3,4 kg

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12° (26W)	32° (26W)
LF927 2700 K	915 lm	1360 lm
LF930 3000 K	945 lm	1400 lm
LF940 4000 K	985 lm	1460 lm

1 CANOPY

Canopy round, large

2 COLOUR

V

silver

white

black

RAL of your choice

lighting body

SI

WS

SW

canopy

P

W

N

3 PENDANTS

5 equal sizes

5

4 LED

2700 K, CRI > 90

3000 K, CRI > 90

4000 K, CRI > 90

927

930

940

5 CONTROL

non dim

DALI

1

3

6 BEAM

12°

32°

1

3

S10H171-N2C34X56

S10H17V-NSWNC5930X31 pendant, lighting body 170 mm, surface-mount canopy, 5 pendants, tube colour black, lighting body & canopy colour black, IP 20, 5 equal body lengths, CRI > 90, 3000 K, DALI dim, beam angle 12° (order sample)

➤ Configure online on [KATALOG.PLANLICHT.COM](#)




Down to UGR ≤ 16 | up to 56 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

20


21

zenit XXS

Hängeleuchte
Pendant luminaire
Suspension

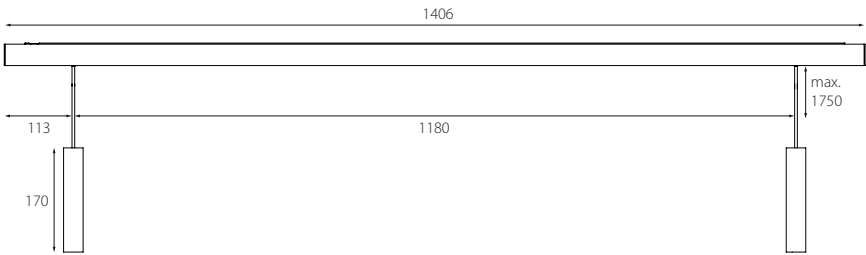

Weight (kg)
1,9 kg

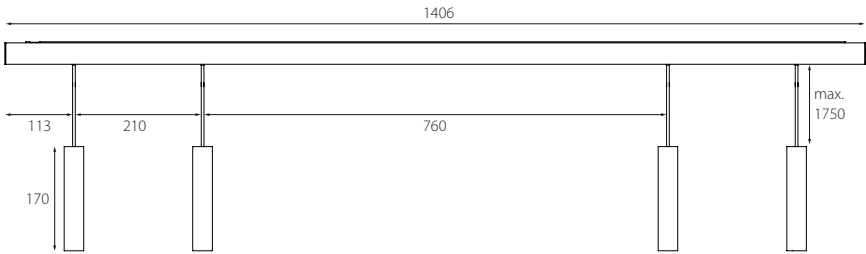

Weight (kg)
2,5 kg

LUMINOUS FLUX (LM) / SYSTEM POWER (W)


	12°		32°	
	2 spot (11,5 W)	4 spots (21 W)	2 spots (11,5 W)	4 spots (21 W)
LF927 2700 K	366 lm	732 lm	544 lm	1088 lm
LF930 3000 K	378 lm	756 lm	560 lm	1120 lm
LF940 4000 K	394 lm	788 lm	584 lm	1168 lm

1 CANOPY	2 COLOUR	3 PENDANTS
Rectangular bar	S silver white black RAL of your choice lighting body SI WS SW canopy P W N	2 4
4 LED	5 CONTROL	6 BEAM
2700 K, CRI > 90 3000 K, CRI > 90 4000 K, CRI > 90	927 930 940 non dim DALI	1 3 12° 32°

S10H171-N2C34X56

S10H17S-NWSWC4940X31 pendant, lighting body 170 mm, surface-mount canopy, 4 pendants, tube colour black, lighting body &, canopy colour white, IP20, 4 equal lighting body lengths, CRI > 90, 4000 K, DALI dim, beam angle 12° (order sample) [► Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS | PENDANT



Down to UGR ≤ 16 | up to 56 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit M

Aufbaustrahler hängend
Pendant downlight
Spot en saillie suspendu



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

SW

BB

PP

ZZ

KK

RR

GG

DD

YY

2 HOUSING COLOUR

- white
- black
- RAL of your choice

WS

SW

☛

3 LED

- 3000 K, CRI > 80 830
- 4000 K, CRI > 80 840
- 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

L

M

H

V

5 CONTROL

- non-dim
- DALI

1

3


6 BEAM

- 23° 2
- 40° 4
- 60° 6


S10H200-1 2 C1 3 4 5 6

S10H200-GGWSC1FLEM34 pendant tube, high-gloss gold, white housing, IP20, special LED "meat", medium output, DALI dim, 40° (order sample) ➔ Configure online on KATALOG.PLANLICHT.COM

ZENIT M | PENDANT

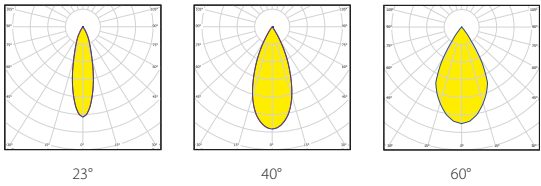

Weight (kg)
1 kg



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 9,4 - 11 W			medium output / 11,5 - 12 W			high output / 16,5 - 17,5 W			very high output / 23 - 25 W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.




Down to UGR ≤ 16 | up to 133 lm / W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switch DIM

NEW zenit XXS variable

Einbauleuchte
Recessed luminaire
Luminaire encastré




12°



32°

Weight (kg)
0,5 kg

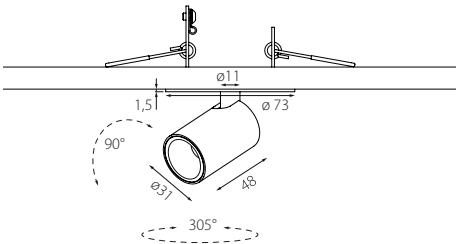

LUMINOUS FLUX (LM) / SYSTEM
POWER (W)

	12° (7W)	32° (7W)
LF927 2700 K	183 lm	272 lm
LF930 3000 K	189 lm	280 lm
LF940 4000 K	197 lm	292 lm

1 HOUSING COLOUR



white
black
silver

WS
SW
SI

2 CANOPY COLOUR



white
black
silver

3 LED



2700 K, CRI > 90
3000 K, CRI > 90
4000 K, CRI > 90

927
930
940

4 CONTROL



non-dim
DALI

1
3

5 BEAM ANGLE



12°
32°

1
3

S10B17E-N12C13X45

S10B17E-NWSWC1930X31 surface mount variable, tube black, housing white, canopy colour white, IP20, 3000 K, CRI > 90, DALI dim, 12° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)



Down to UGR ≤ 16 | up to 42 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit M swivelling

Einbauleuchte
Recessed luminaire
Luminaire encastré



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V


6 BEAM

- 1 23° 2
- 3 40° 4
- 60° 6

S10E120-12C13456

S10E120-RRWSC1830L14 ø 120 mm (swivelling), tube capital copper, housing white, IP20, 3000 K, CRI > 80, low output, non-dim, 40° (order sample) ➤ Configure online on KATALOG.PLANLICHT.COM

ZENIT M | RECESSED

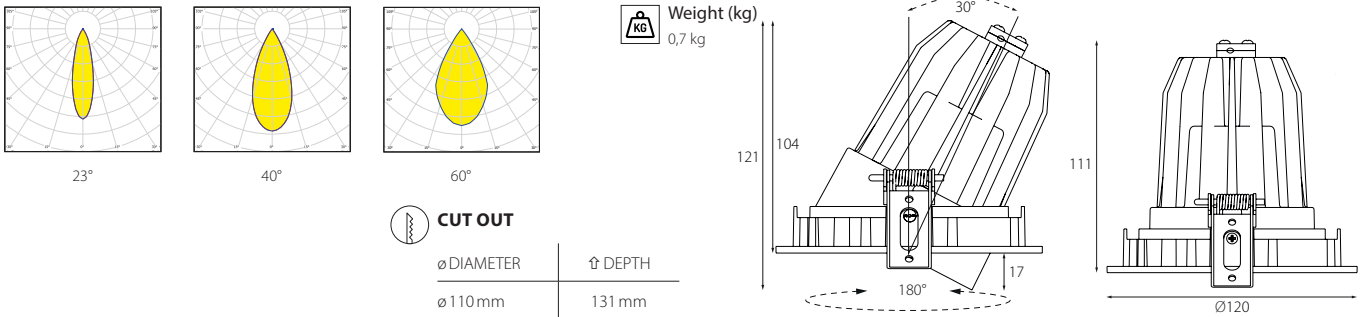

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 10 - 10,5W			medium output / 12 - 13W			high output / 18 - 19W			very high output / 22 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80


Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.



Down to UGR ≤ 16 | up to 128 lm / W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

zenit M flip

Einbauleuchte
Recessed luminaire
Luminaire encastré

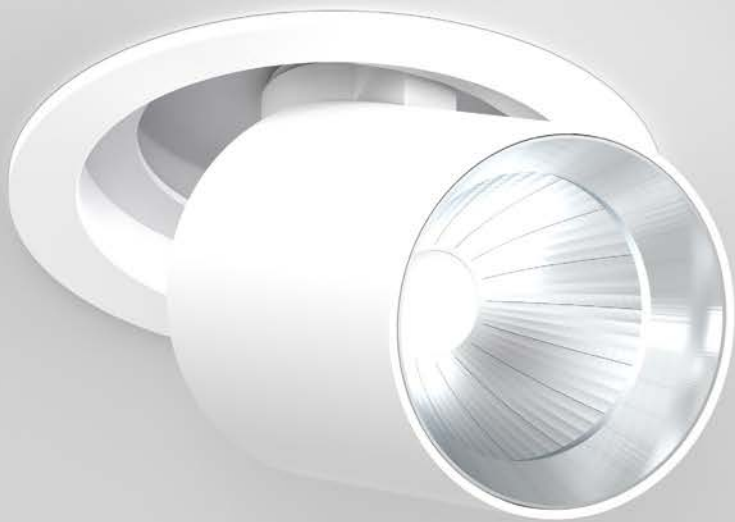

1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP RAL of your choice
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 3 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI
- H
- V

6 BEAM




- 1 23° 2
- 3 40° 4
- 60° 6

S10E140-12C13456

S10E140-RRWSC1830L14 ø 140 mm (flip), tube capital copper, housing white, IP20, 3000 K, CRI > 80, low output, non-dim, 40° (order sample)

➤ Configure online on KATALOG.PLANLICHT.COM

ZENIT M | RECESSED

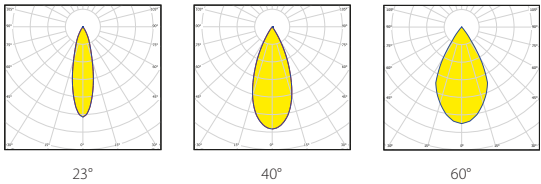

LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOUR BLACK MATTE (NN)

	low output / 10 - 10,5W			medium output / 12 - 13W			high output / 18 - 19W			very high output / 22 - 25W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichenlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Weichzeichnerglas Verre effet flou	S10-WGL-80

Reflektortausch werkzeuglos möglich. Passive Kühlung.
Replacement of the reflector without the use of any tools. Passive cooling.
Remplacement du réflecteur sans outil. Refroidissement passif.




Down to UGR ≤ 16 | up to 128 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

zenit XXS segment spots
for p.thirty

Systeme | Segmente
Systems | Segments
Systèmes | Segment



1 PROFILE MOUNTING




surface
pendant
recessed

2 SPOTS

A 1 spot
H 2 spots
E 3 spots
4 spots
5 spots


3 COLOUR



1
2
3
4
5

SISI
WSWS
SWSW

4 LED



2700 K, CRI > 90
3000 K, CRI > 90
4000 K, CRI > 90

5 CONTROL



927
930
940

6 BEAM ANGLE



X1
X3





1
3

P30-1 ZBS 2 N 3 4 5 6

P30-AZBS1NSWSW927X11 surface mounted p.thirty segment, zenit XXS surface variable, single spot, black tube, black spot, black housing & blank cover, 2700 K, CRI > 90, non-dim, 12°, IP20 (order sample)

➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS | SYSTEMS

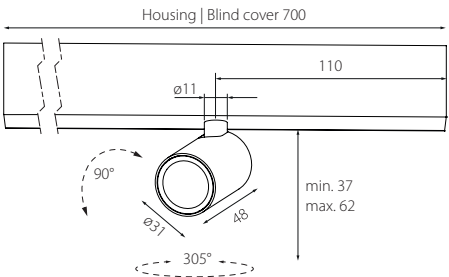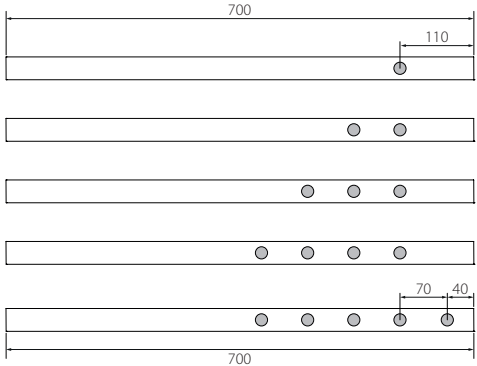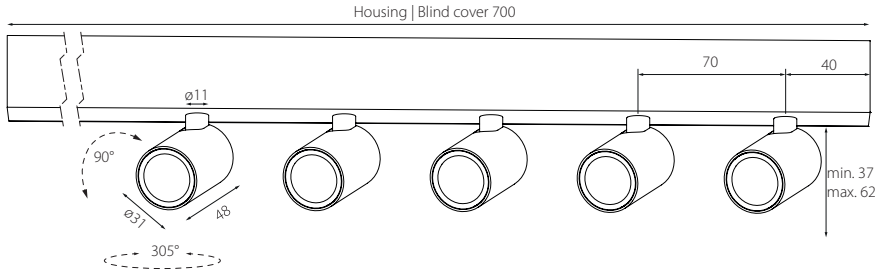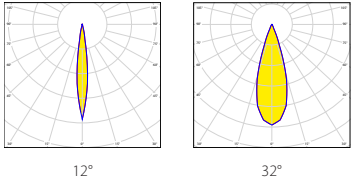

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°					32°				
	1 spot (7W)	2 spots (11,5W)	3 spots (16,5W)	4 spots (21 W)	5 spots (26W)	1 spot (7W)	2 spots (11,5W)	3 spots (16,5W)	4 spots (21 W)	5 spots (26W)
LF927 2700 K	183 lm	366 lm	549 lm	732 lm	915 lm	272 lm	544 lm	816 lm	1088 lm	1360 lm
LF930 3000 K	189 lm	378 lm	567 lm	756 lm	945 lm	280 lm	560 lm	840 lm	1120 lm	1400 lm
LF940 4000 K	197 lm	394 lm	591 lm	788 lm	985 lm	292 lm	584 lm	876 lm	1168 lm	1460 lm

WEIGHT

1 spot	0,7 kg
2 spots	0,8 kg
3 spots	0,9 kg
4 spots	0,9 kg
5 spots	1,0 kg


based on recessed mounted version




Down to UGR ≤ 16 | up to 56 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XXS segment for p.thirty

Systeme | Segmente
Systems | Segments
Systèmes | Segment

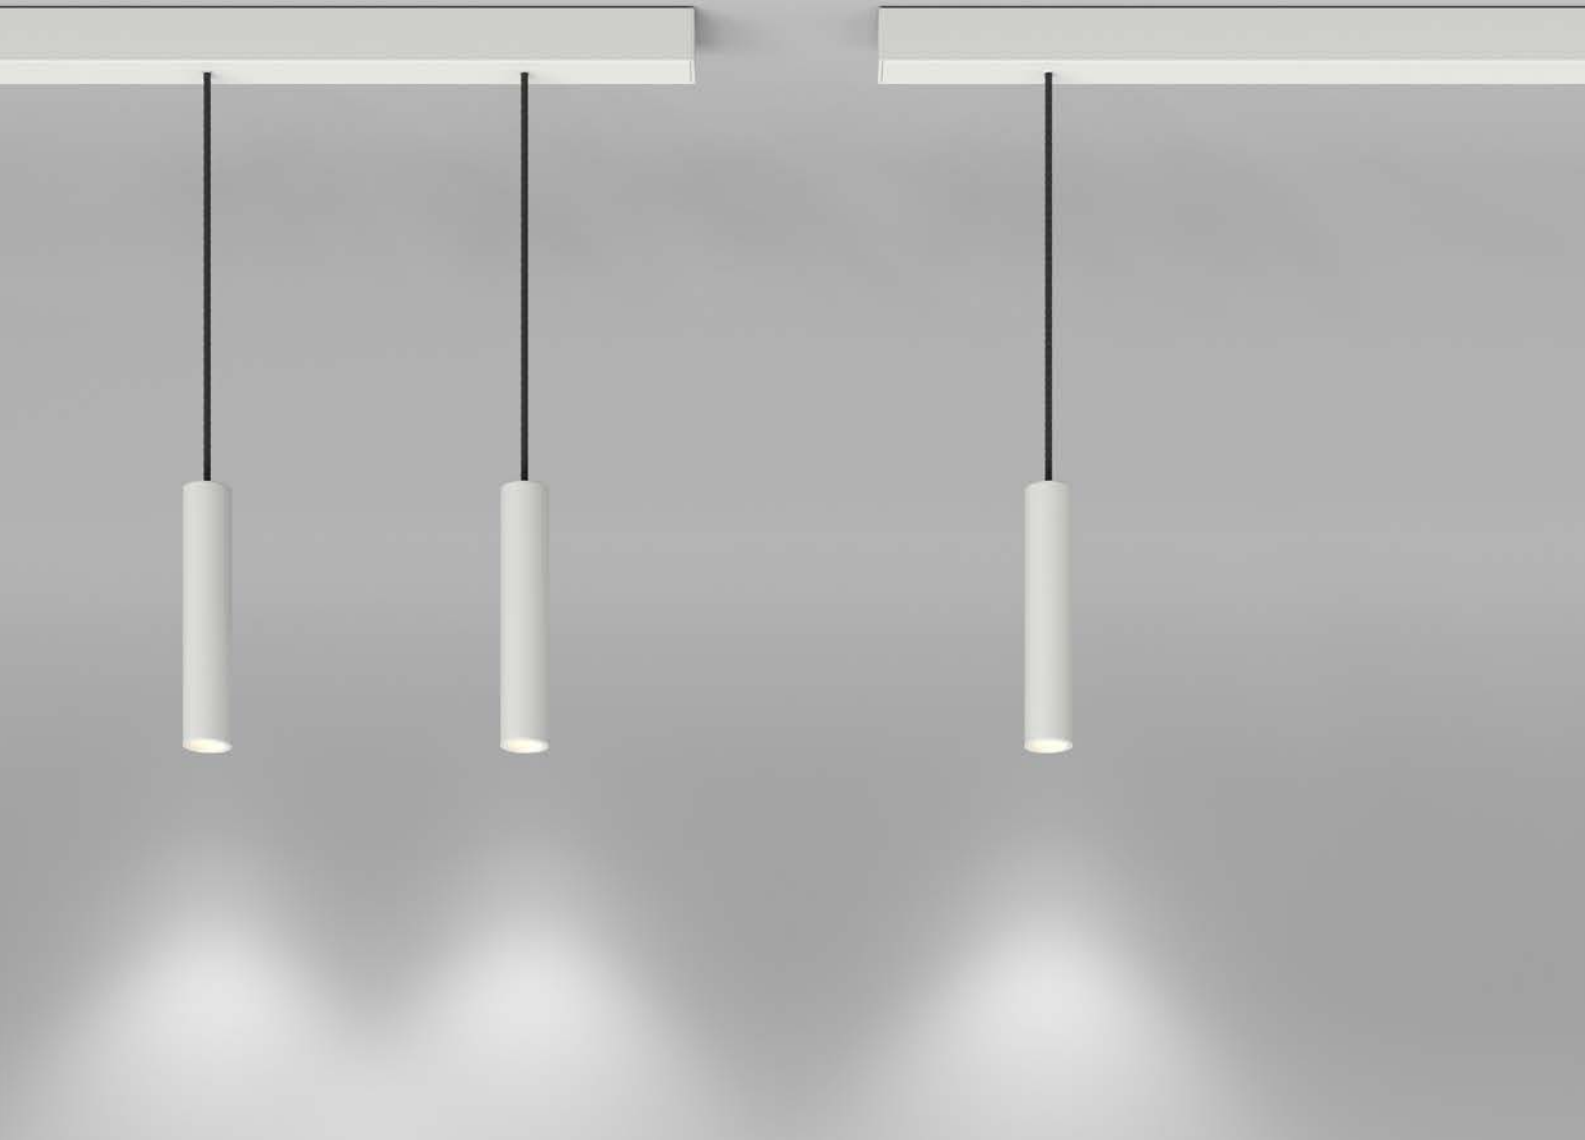

1 PROFILE MOUNTING



surface
pendant
recessed

2 PENDANTS


A 1 pendant
H 2 pendants
E

3 COLOUR



SISI
WSWS
SWSW

4 LED



2700 K, CRI > 90
3000 K, CRI > 90
4000 K, CRI > 90

5 CONTROL



non-dim
DALI

927
930
940

6 BEAM ANGLE



12°
32°


1
3

P30-1 ZHS 2 N 3 4 5 6


P30-AZHS2NSWSW927X11 surface mounted p.thirty segment, 2 zenit XXS pendants, black tube, black spot, black housing & blank cover, 2700 K, CRI > 90, non-dim, 12°, IP20 (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)



ZENIT XXS | SYSTEMS



12°



32°

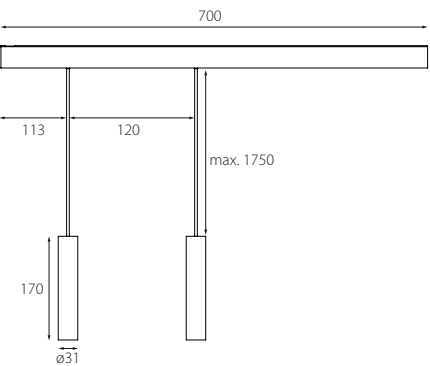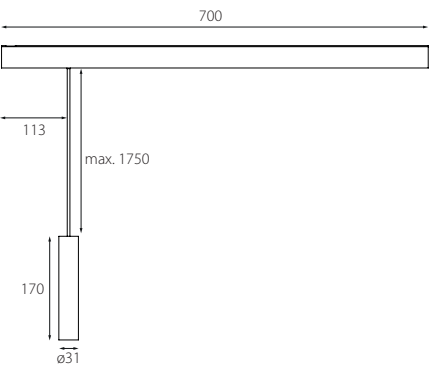

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°		32°	
	1 pendant (7W)	2 pendants (11,5W)	1 pendant (7W)	2 pendants (11,5W)
LF927 2700 K	183 lm	366 lm	272 lm	544 lm
LF930 3000 K	189 lm	378 lm	280 lm	560 lm
LF940 4000 K	197 lm	394 lm	292 lm	584 lm

WEIGHT

1 pendant	1,0 kg
2 pendants	1,3 kg

based on recessed mounted version



Down to UGR ≤ 16 | up to 51 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit S inset & p.fusion
for p.forty & pure 3 systems

Systeme | Inset
Systems | Inset
Systèmes | Inset




1 SYSTEM		2 SPOTS		3 TUBE COLOUR	
p.forty	P40	1 spot	1	 gold	G
pure 3	P33	2 spots	2	 black	S
4 HOUSING COLOUR		5 BLANK COVER COLOUR		6 LED	
 white	W	 silver	SI	 3000 K, CRI > 80	830
 black	S	 white	WS	 4000 K, CRI > 80	840
		 black	SW	 2700 K, CRI > 90	927
				 3000 K, CRI > 90	930
				 3500 K, CRI > 90	935
				 4000 K, CRI > 90	940
7 OUTPUT		8 CONTROL		9 BEAM	
 low output	L	 non-dim	1	 16°	1
 high output	H	 DALI	3	 23°	2
				 40°	4

1-Z2S-3456789

P33-Z2S-GSW5940H32 pure 3 system, 2 spots, tube colour gold, black housing, white blank cover, CRI > 90, 4000K, high output, DALI dim, 23° (order sample)

➤ [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT S INSET & P.FUSION | SYSTEMS

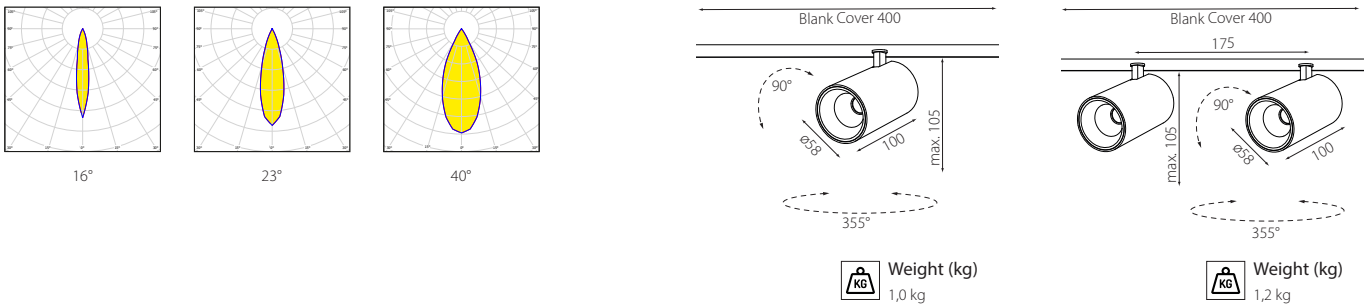

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	low output (7,4W)						high output (10,5W)					
	16°		23°		40°		16°		23°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000K	882 lm	868 lm	819 lm	805 lm	821 lm	801 lm	1143 lm	1125 lm	1061 lm	1044 lm	1064 lm	1038 lm
LF840 4000K	926 lm	911 lm	860 lm	846 lm	862 lm	841 lm	1201 lm	1181 lm	1114 lm	1096 lm	1118 lm	1090 lm
LF927 2700K	724 lm	712 lm	672 lm	661 lm	674 lm	657 lm	938 lm	923 lm	871 lm	857 lm	874 lm	852 lm
LF930 3000K	908 lm	893 lm	842 lm	829 lm	845 lm	824 lm	1180 lm	1160 lm	1095 lm	1077 lm	1098 lm	1071 lm
LF935 3500K	933 lm	918 lm	866 lm	852 lm	869 lm	847 lm	1213 lm	1193 lm	1125 lm	1107 lm	1129 lm	1101 lm
LF940 4000K	936 lm	921 lm	868 lm	854 lm	871 lm	850 lm	1216 lm	1197 lm	1129 lm	1111 lm	1133 lm	1105 lm

* figures per single spot

OPTIONAL ACCESSORY


Honeycomb glare protection	S10-BLE-58
Oval spot lens	S10-OZL-58
Clear protective glass	S10-SGL-58
Blur glass	S10-WGL-58



Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

P.FUSION FOR P.FORTY & PURE 3
(ONLY FOR SURFACE AND RECESSED - MOUNTED PROFILES (L=400 MM))

1 SYSTEM		2 QUANTITY		3 BLANK COVER	
p.forty	P40	1	 white	WS	
pure 3	P33	2	 black	SW	
			 silver	SI	
4 TECHNOLOGY/OUTPUT		5 CONTROL			
High voltage (230V AC)	HV		non-dim	1	
Constant current	CC*		DALI	3	
1-FSN 2 3 4 5					
P40-FSN2WSHV1 p.forty fusion, 2 cable grommets, symmetrical, blank cover white, high voltage, non-dim (order sample)					
*5 - 30W, 250/400/550/700mA via dip-switch					





Down to UGR ≤ 16 | up to 126 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

zenit XS inset for pure 3 systems

Systeme | Inset
Systems | Inset
Systèmes | Inset



1 SPOTS

- 1 spot
- 2 spots

2 TUBE COLOUR

- gold
- black

3 HOUSING COLOUR

- white
- black

4 BLANK COVER COLOUR

- silver
- white
- black

5 LED

- 3000 K, CRI > 80
- 4000 K, CRI > 80
- 2700 K, CRI > 90
- 3000 K, CRI > 90
- 4000 K, CRI > 90

6 CONTROL

- non-dim
- DALI

7 BEAM



- 24°
- 40°

P33-Z 1 XS-2 3 4 5 H 6 7

P33-Z2XS-SWWS930H14 2 spots, tube colour black, white housing, white blank cover, CRI > 90, 3000 K, non-dim, 40°, (order sample)

► Configure online on [KATALOG.PLANLICHT.COM](https://katalog.planlicht.com)

ZENIT XS INSET | SYSTEMS

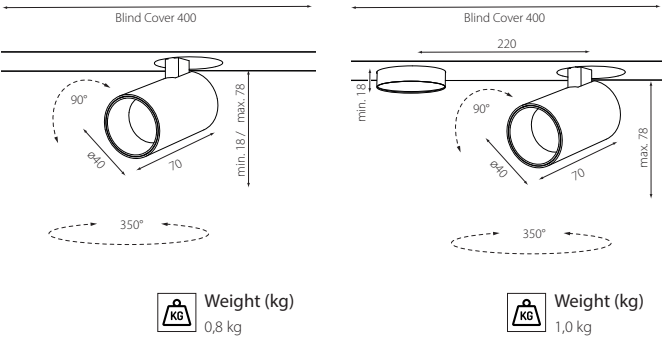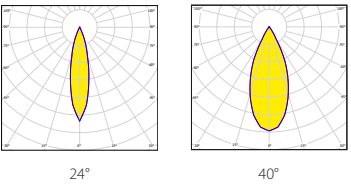

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	24° (7,7W)		40° (7,7W)	
	gold	black	gold	black
LF830 3000 K	507 lm	453 lm	496 lm	443 lm
LF840 4000 K	529 lm	473 lm	518 lm	463 lm
LF927 2700 K	380 lm	340 lm	373 lm	333 lm
LF930 3000 K	404 lm	361 lm	395 lm	353 lm
LF940 4000 K	433 lm	387 lm	423 lm	378 lm

* figures per single spot

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-40
Oval spot lens	S10-OZL-40
Blur glass	S10-WGL-40




Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.



Down to UGR ≤ 16 | up to 69 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

NEW zenit XXS inset
for p.forty & pure 3 systems

Systeme | Inset
Systems | Inset
Systèmes | Inset

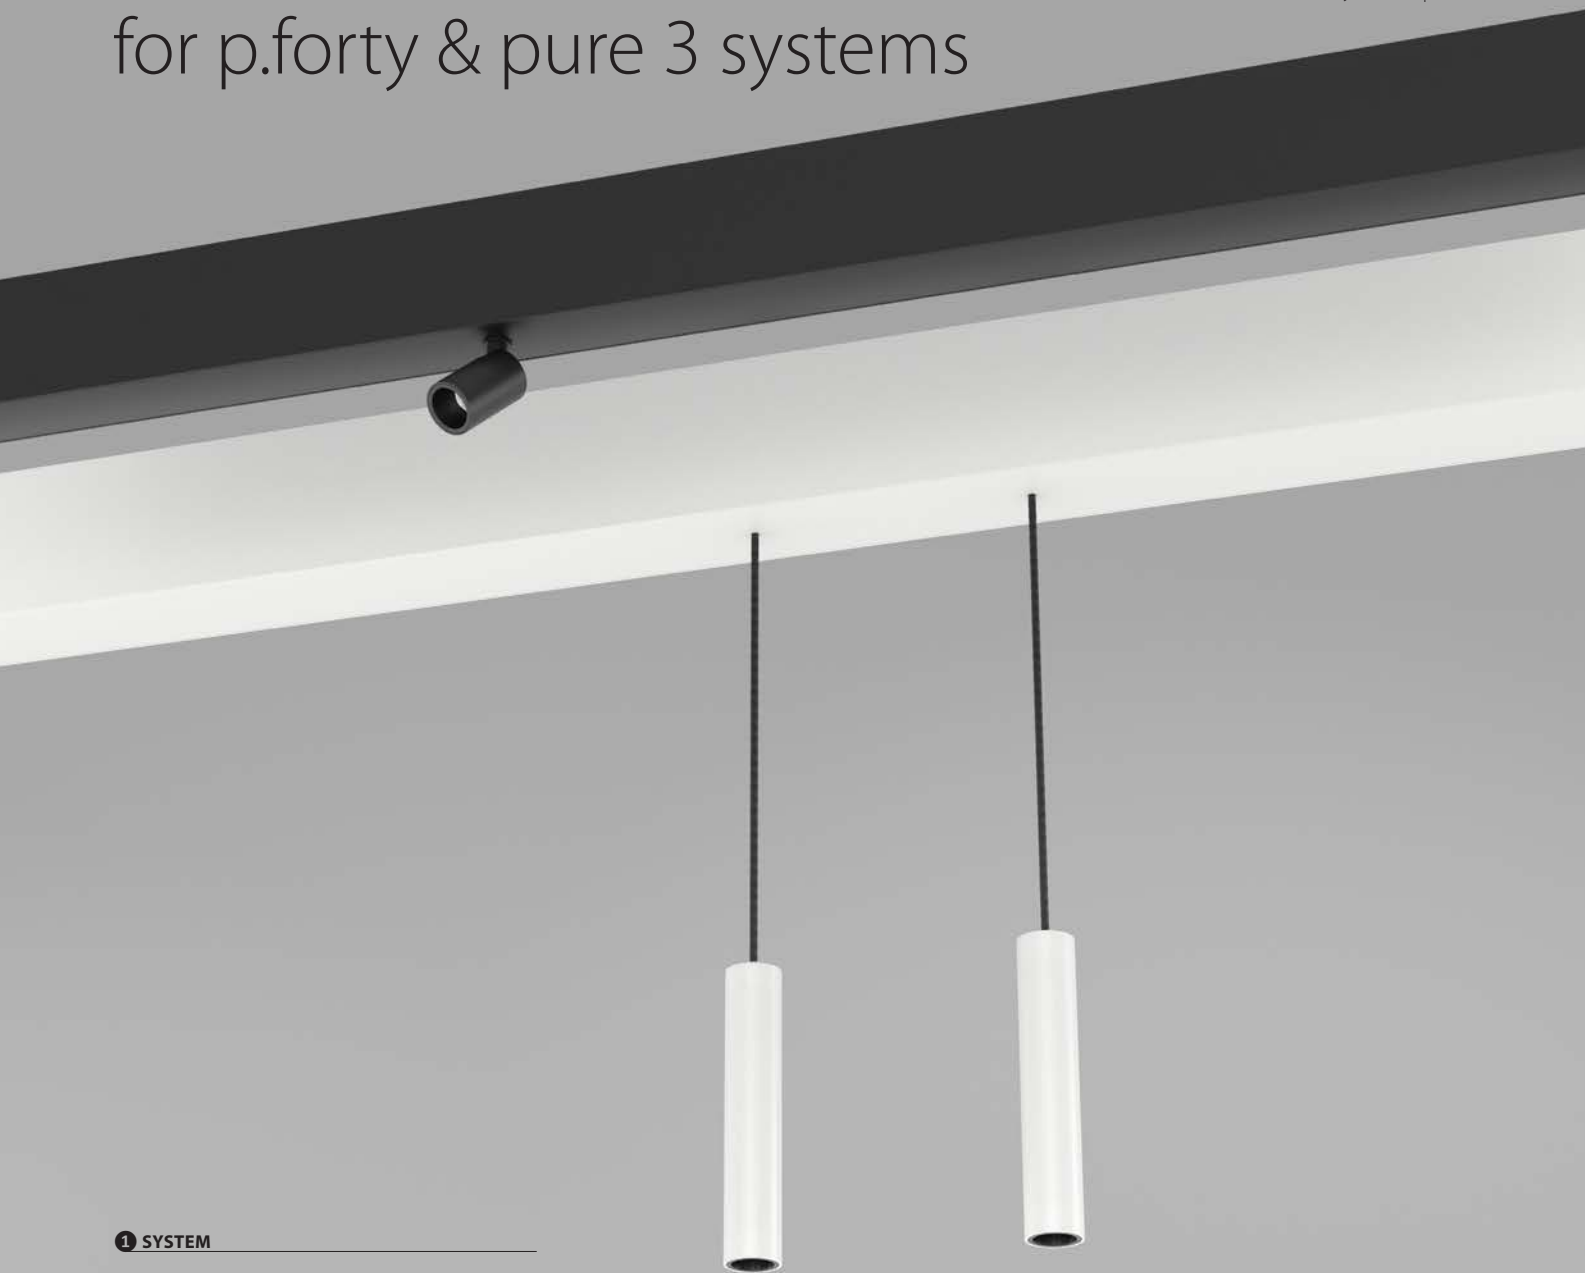

1 SYSTEM

p.forty	P40
pure 3	P33

2 SPOT MOUNTING

variable	B
pendant	H

3 SPOTS

1 spot	1
2 spots	2

4 COLOUR

	silver	SISI
	white	WSWS
	black	SWSW

5 LED

	2700 K, CRI > 90	927
	3000 K, CRI > 90	930
	4000 K, CRI > 90	940

6 CONTROL

	non-dim	1
	DALI	3

7 BEAM


	12°	1
	32°	3

1-BZ2S3N45X67

P40-BZH52NWSWS927X11 p.forty system, pendant, 2 spots, white housing and spot, CRI > 90, 2700K, non-dim, 12° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)

ZENIT XXS INSET | SYSTEMS

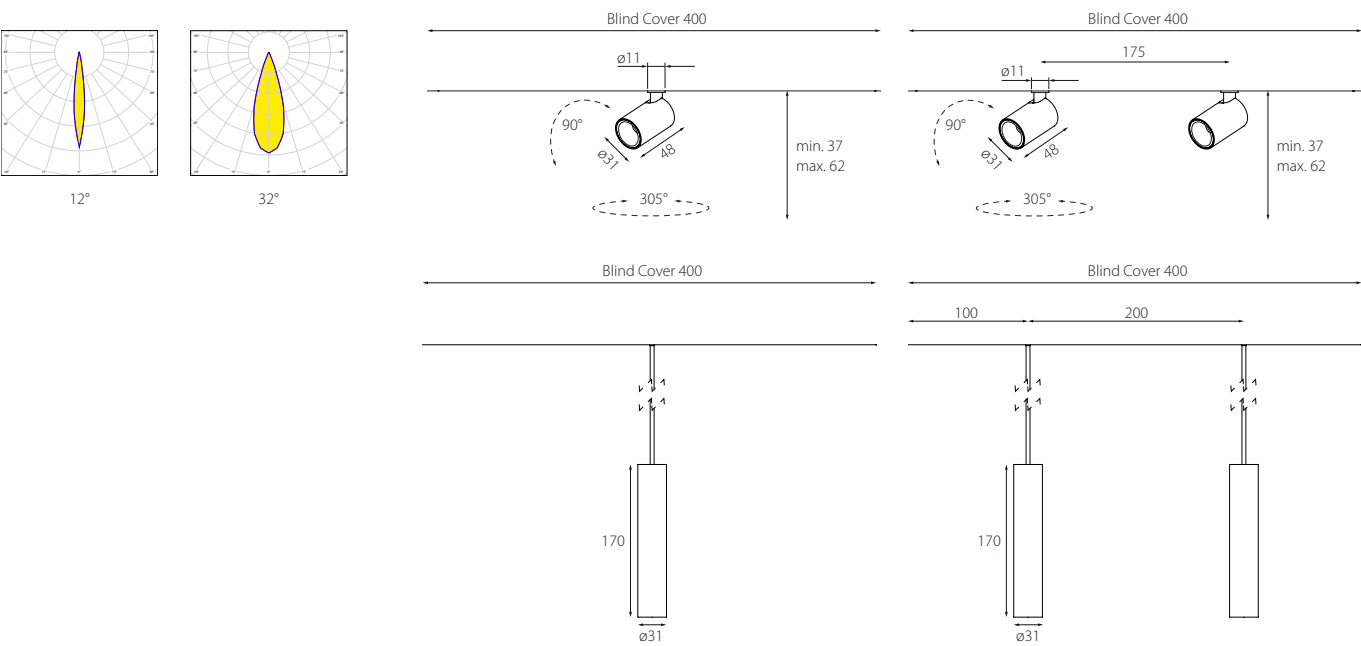

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°		32°	
	1 spot (7W)	2 spots (11,5W)	1 spot (7W)	2 spots (11,5W)
LF927 2700 K	183 lm	366 lm	272 lm	544 lm
LF930 3000 K	189 lm	378 lm	280 lm	560 lm
LF940 4000 K	197 lm	394 lm	292 lm	584 lm

WEIGHT

	p.forty	pure 3
1 spot	0,4 kg	0,5 kg
2 spots	0,5 kg	0,6 kg
1 pendant	0,6 kg	0,7 kg
2 pendants	0,8 kg	0,9 kg



Down to UGR ≤ 16 | up to 51 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM

NEW zenit S inset & p.fusion for p.bright system

Systeme | Inset
Systems | Inset
Systèmes | Inset



1 SPOTS

- 1 spot
- 2 spots

2 TUBE COLOUR

- gold
- black

3 HOUSING COLOUR

- white
- black

4 BLANK COVER COLOUR

- silver
- white
- black

5 LED

- 3000 K, CRI > 80
- 4000 K, CRI > 80
- 2700 K, CRI > 90
- 3000 K, CRI > 90
- 3500 K, CRI > 90
- 4000 K, CRI > 90

6 OUTPUT/CONTROL

- low output non-dim
- high output non-dim
- high output DALI

7 BEAM



- 16°
- 23°
- 40°

P61-Z 1 5-2 3 4 5 6 7

P61-Z1S-SWWS927H32 1 spot black, tube colour black, white housing, white blank cover, CRI > 90, 2700K, high output, DALI dim, 23° (order sample)

Configure online on KATALOG.PLANLICHT.COM

ZENIT S INSET & P.FUSION | SYSTEMS

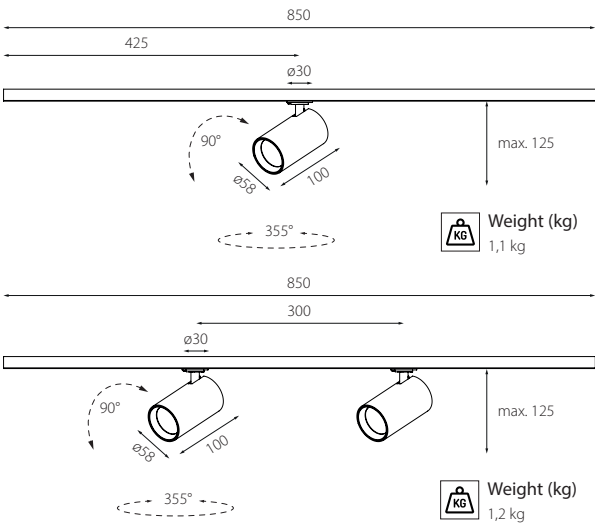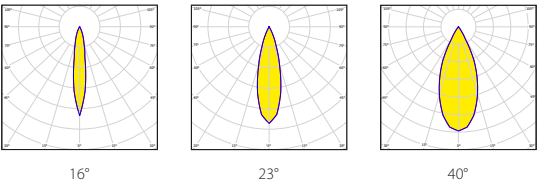

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	low output (7,4 W)						high output (10,5 W)					
	16°		23°		40°		16°		23°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000 K	882 lm	868 lm	819 lm	805 lm	821 lm	801 lm	1143 lm	1125 lm	1061 lm	1044 lm	1064 lm	1038 lm
LF840 4000 K	926 lm	911 lm	860 lm	846 lm	862 lm	841 lm	1201 lm	1181 lm	1114 lm	1096 lm	1118 lm	1090 lm
LF927 2700 K	724 lm	712 lm	672 lm	661 lm	674 lm	657 lm	938 lm	923 lm	871 lm	857 lm	874 lm	852 lm
LF930 3000 K	908 lm	893 lm	842 lm	829 lm	845 lm	824 lm	1180 lm	1160 lm	1095 lm	1077 lm	1098 lm	1071 lm
LF935 3500 K	933 lm	918 lm	866 lm	852 lm	869 lm	847 lm	1213 lm	1193 lm	1125 lm	1107 lm	1129 lm	1101 lm
LF940 4000 K	936 lm	921 lm	868 lm	854 lm	871 lm	850 lm	1216 lm	1197 lm	1129 lm	1111 lm	1133 lm	1105 lm

* figures per single spot

OPTIONAL ACCESSORY

- Honeycomb glare protection S10-BLE-58
- Oval spot lens S10-OZL-58
- Clear protective glass S10-SGL-58
- Blur glass S10-WGL-58



Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

P.FUSION FOR P.BRIGHT

ONLY FOR SURFACE - MOUNTED PROFILES (L = 850 MM)

1 CABLE GROMMETS

- 1 cable
- 2 cables

2 BLANK COVER


- white
- black
- silver

3 TECHNOLOGY/OUTPUT

- WS High voltage (230V AC) DALI HV3
- SW Constant current non-dim CC1
- SI Constant current DALI CC3

P61-FSN 1 2 3


P61-FSN2WSHV3 p.bright fusion, 2 cable grommets, blank cover white, high voltage, DALI (order sample)



up to 126lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

NEW zenit XXS inset
for p.bright system

Systeme | Inset
Systems | Inset
Systèmes | Inset

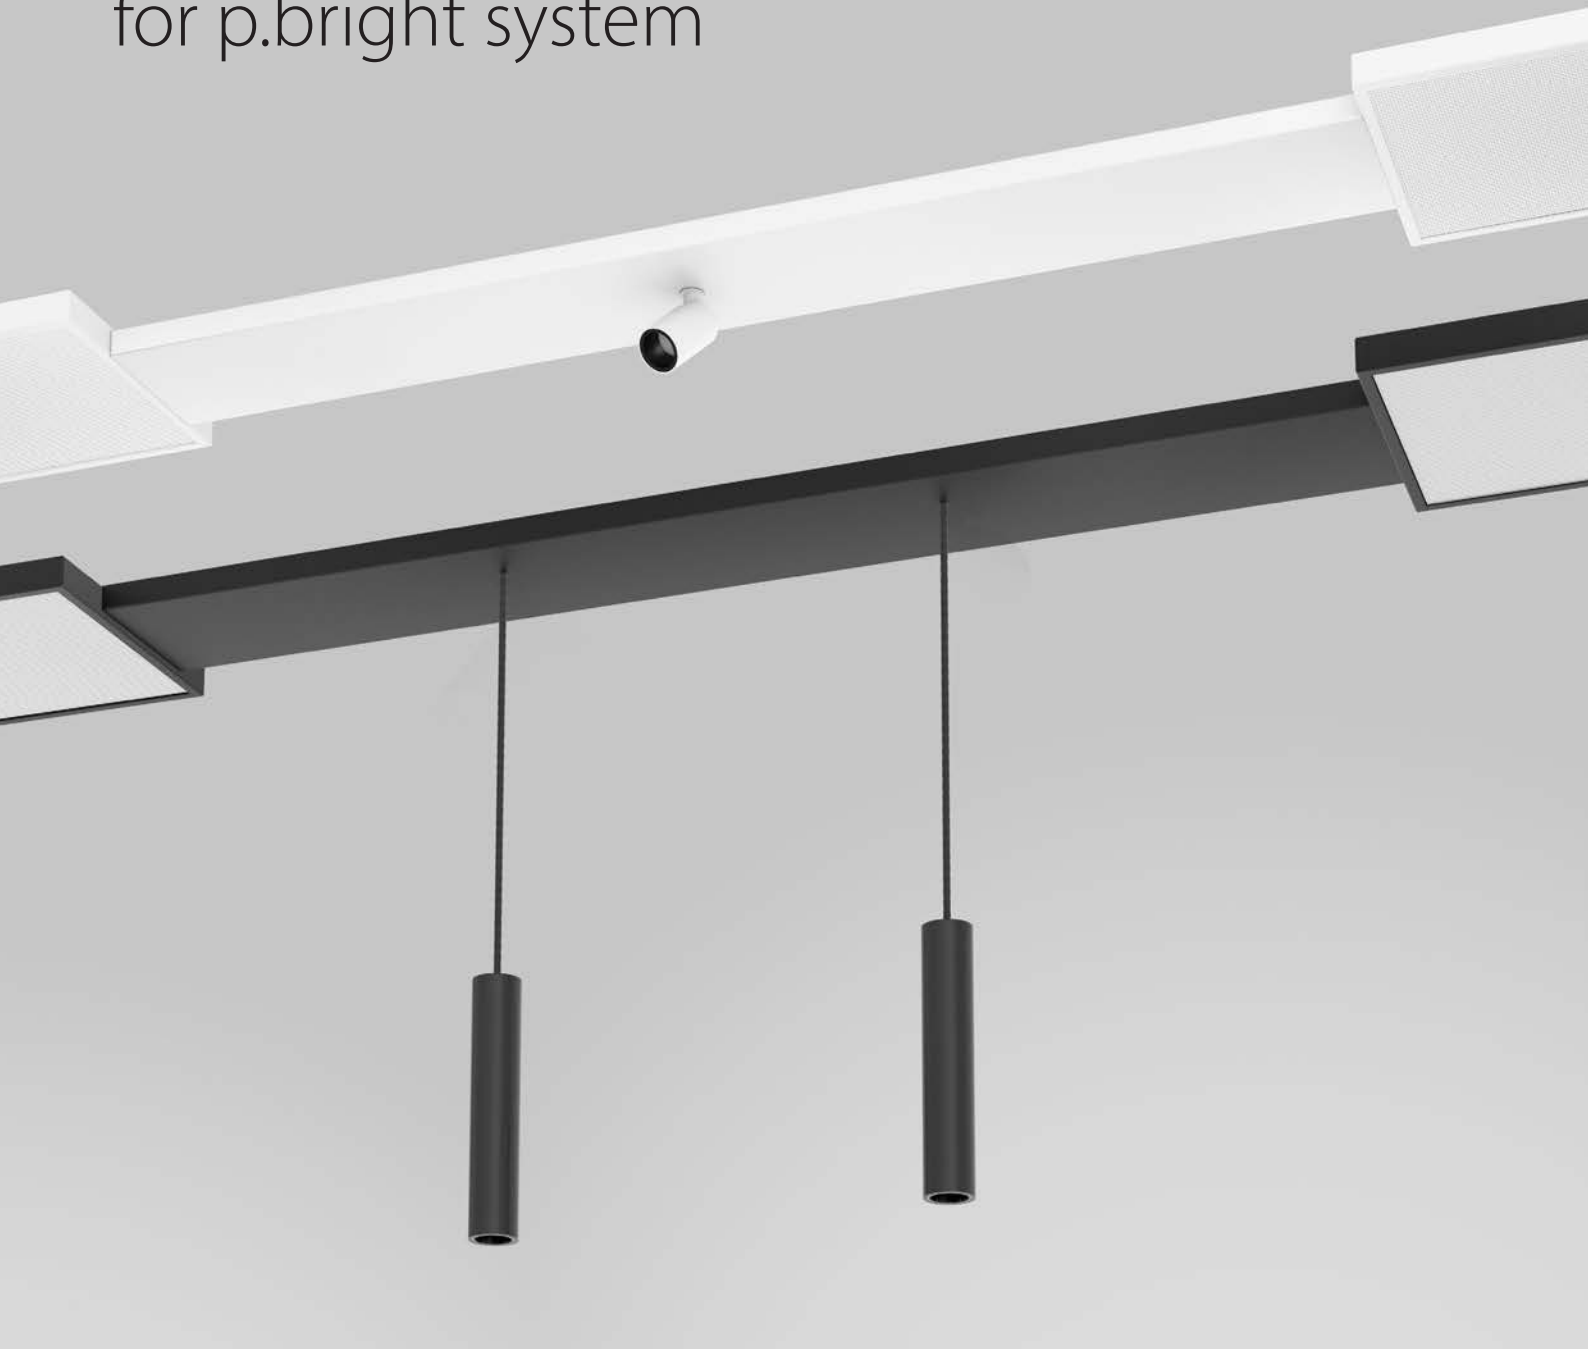

1 MOUNTING SPOT

-  surface variable
-  pendant

2 SPOTS

- B** 1 spot
- H** 2 spots

3 COLOUR

-  silver
-  white
-  black

SISI

WSWS

SWSW

4 LED

-  2700 K, CRI > 90
-  3000 K, CRI > 90
-  4000 K, CRI > 90

- 927**
- 930**
- 940**

5 CONTROL

-  non-dim
-  DALI

- 1**
- 3**

6 BEAM ANGLE

-  12°
-  32°


- 1**
- 3**

P61-BZ1S2N34X56


P61-BZH52NWSWS927X11 zenit XXS pendant, 2 spots, white spot, white housing & blind cover, 2700 K, CRI > 90, non-dim, 12° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)





ZENIT XXS INSET | SYSTEMS



12°



32°

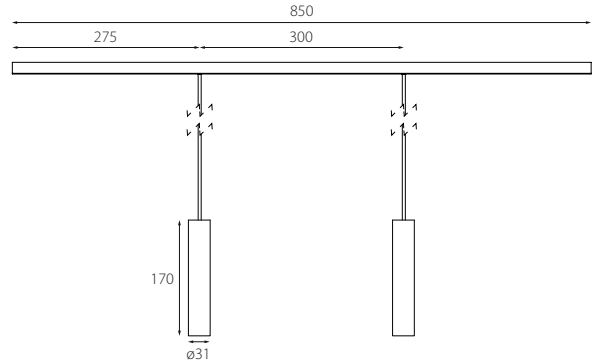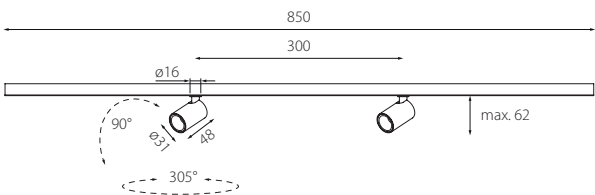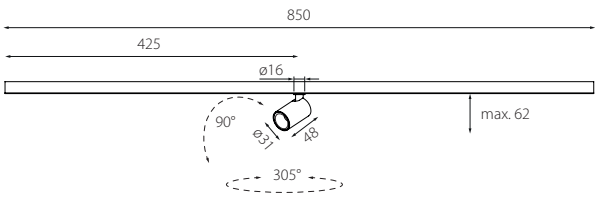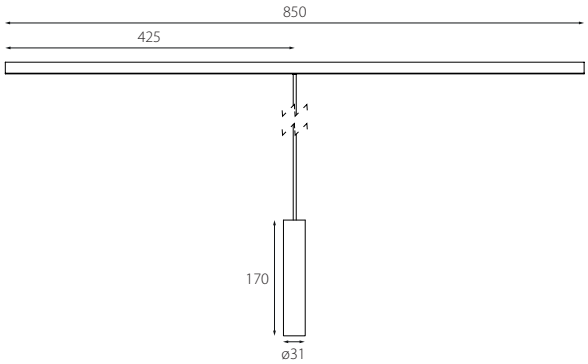

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	12°		32°	
	1 spot (7W)	2 spots (11,5W)	1 spot (7W)	2 spots (11,5W)
LF927 2700 K	183 lm	366 lm	272 lm	544 lm
LF930 3000 K	189 lm	378 lm	280 lm	560 lm
LF940 4000 K	197 lm	394 lm	292 lm	584 lm

WEIGHT

1 spot	1,1 kg
2 spots	1,2 kg
1 pendant	1,3 kg
2 pendants	1,5 kg



Down to UGR ≤ 16 | up to 51 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI push switchDIM




1 TUBE COLOUR		2 HOUSING COLOUR		3 LED	
gold	GD	white	WS	3000 K, CRI > 80	830
black	SW	black	SW	4000 K, CRI > 80	840
				2700 K, CRI > 90	927
				3000 K, CRI > 90	930
				3500 K, CRI > 90	935
				4000 K, CRI > 90	940
4 OUTPUT		5 CONTROL		6 BEAM	
low output (non-dim only)	L	non-dim	1	16°	1
high output	H	DALI Stucchi OneTrack/Global Pulse	G	23°	2
				40°	4

S10S100-12C13456

S10S100-GDWSC1940H12 tube colour gold, housing white, IP20, CRI > 90, 4000K, high output, non-dim, 23° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](#)

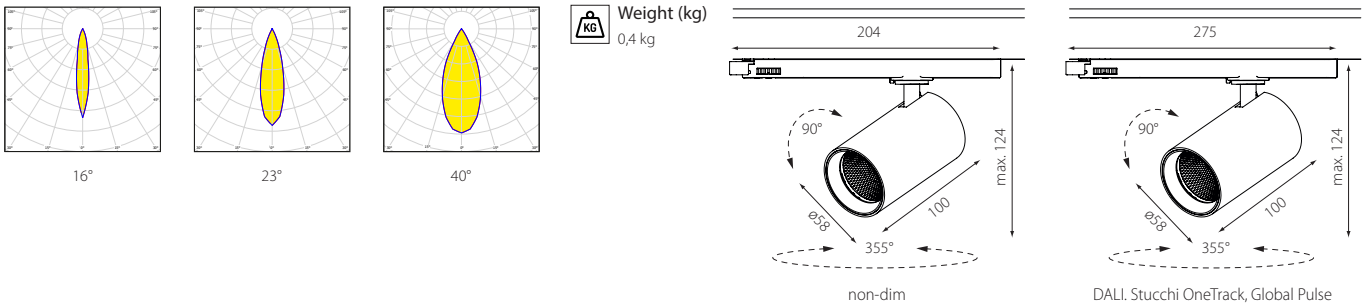

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)*

	low output (7,4 W)						high output (10,5 W)					
	16°		23°		40°		16°		23°		40°	
	gold	black	gold	black	gold	black	gold	black	gold	black	gold	black
LF830 3000 K	882 lm	868 lm	819 lm	805 lm	821 lm	801 lm	1143 lm	1125 lm	1061 lm	1044 lm	1064 lm	1038 lm
LF840 4000 K	926 lm	911 lm	860 lm	846 lm	862 lm	841 lm	1201 lm	1181 lm	1114 lm	1096 lm	1118 lm	1090 lm
LF927 2700 K	724 lm	712 lm	672 lm	661 lm	674 lm	657 lm	938 lm	923 lm	871 lm	857 lm	874 lm	852 lm
LF930 3000 K	908 lm	893 lm	842 lm	829 lm	845 lm	824 lm	1180 lm	1160 lm	1095 lm	1077 lm	1098 lm	1071 lm
LF935 3500 K	933 lm	918 lm	866 lm	852 lm	869 lm	847 lm	1213 lm	1193 lm	1125 lm	1107 lm	1129 lm	1101 lm
LF940 4000 K	936 lm	921 lm	868 lm	854 lm	871 lm	850 lm	1216 lm	1197 lm	1129 lm	1111 lm	1133 lm	1105 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-58
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-58
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-58
Weichzeichnerglas Diffuser protection glass Verre effet flou	S10-WGL-58



up to 126 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & Vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output

5 CONTROL

- L non-dim
- M DALI, Stucchi OneTrack/Global Pulse
- H
- V


6 BEAM

- 23° 2
- 40° 4
- 60° 6


S10S105-12C13456

S10S105-SWWSC1940H14 tube colour black, housing white, IP20, CRI > 90, 4000K, high output, non-dim, beam angle 40° (order sample)

► Configure online on KATALOG.PLANLICHT.COM

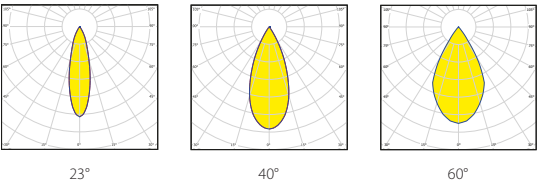

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

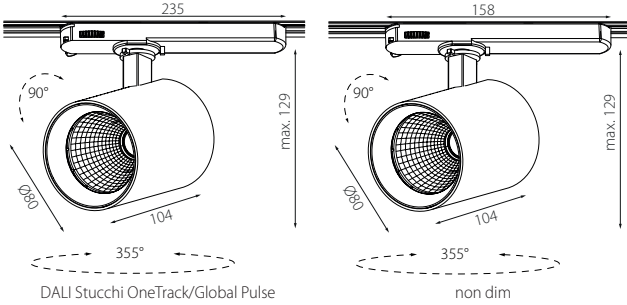

Weight (kg)
0,6 kg

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 9,4 - 11 W			medium output / 11,5 - 12 W			high output / 16,5 - 17,5 W			very high output / 23 - 25 W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm

OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Verre effet flou	S10-WGL-80



Down to UGR ≤ 16 | up to 133 lm/W | IEC 62471: Blue light hazard: RG ≤ 1

zenit M

3-Phasen-Strahler
3-Phase spot light
Projecteur à 3 phases



1 TUBE COLOUR

- black matte
- high-gloss silver
- silver matte
- high gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

2 HOUSING COLOUR

- SW white
- BB black
- PP
- ZZ
- KK
- RR
- GG
- DD
- YY

3 LED

- WS 3000 K, CRI > 80 830
- SW 4000 K, CRI > 80 840
- 2700 K, CRI > 90 927
- 3000 K, CRI > 90 930
- 3500 K, CRI > 90 935
- 4000 K, CRI > 90 940
- Fashion (3250 K) FAS
- Bakery goods BAC
- Meat FLE
- Sausage products WUR
- Fish FIS
- Fruits & Vegetables FRU

4 OUTPUT

- low output
- medium output
- high output
- very high output
- extra high output (not DALI Eutrac)

5 CONTROL

- L non-dim
- M DALI Eutrac
- H DALI, Stucchi OneTrack/Global Pulse
- V
- E


6 BEAM

- 1 23° 2
- 3 40° 4
- G 60° 6


S10S200-12C13456

S10S200-GGWSC1FLEM34 tube colour high-gloss gold, housing white, IP20, special LED„meat“, medium output, DALI Eutrac, 40° (order sample) ➔ Configure online on KATALOG.PLANLICHT.COM

ZENIT M | TRACK

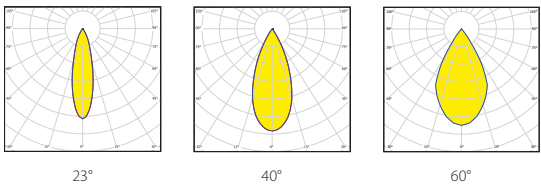

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.

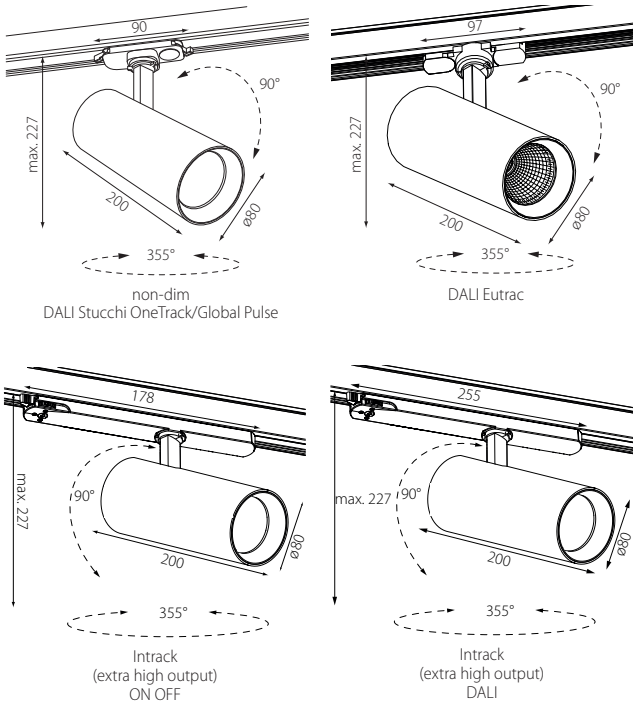

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	low output / 9,4 - 11 W			medium output / 11,5 - 12 W			high output / 16,5 - 17,5 W			very high output / 23 - 25 W			extra high output / 39 - 41 W		
	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°	23°	40°	60°
LF830 3000 K	1214 lm	1216 lm	1152 lm	1440 lm	1443 lm	1367 lm	2086 lm	2090 lm	1980 lm	2682 lm	2687 lm	2546 lm	4563 lm	4572 lm	4332 lm
LF840 4000 K	1249 lm	1252 lm	1186 lm	1482 lm	1485 lm	1407 lm	2147 lm	2151 lm	2038 lm	2760 lm	2765 lm	2620 lm	4696 lm	4704 lm	4458 lm
LF927 2700 K	951 lm	953 lm	903 lm	1128 lm	1130 lm	1071 lm	1634 lm	1637 lm	1551 lm	2101 lm	2105 lm	1994 lm	3575 lm	3581 lm	3393 lm
LF930 3000 K	1304 lm	1307 lm	1238 lm	1543 lm	1546 lm	1465 lm	2218 lm	2222 lm	2105 lm	2828 lm	2833 lm	2684 lm	4623 lm	4631 lm	4389 lm
LF935 3500 K	967 lm	974 lm	957 lm	1151 lm	1159 lm	1139 lm	1687 lm	1696 lm	1667 lm	2196 lm	2203 lm	2165 lm	4750 lm	4758 lm	4508 lm
LF940 4000 K	1345 lm	1348 lm	1277 lm	1592 lm	1595 lm	1511 lm	2287 lm	2292 lm	2171 lm	2916 lm	2921 lm	2768 lm	4871 lm	4880 lm	4624 lm
FAS	880 lm	871 lm	829 lm	1047 lm	1037 lm	986 lm	1531 lm	1516 lm	1442 lm	1988 lm	1968 lm	1873 lm	3444 lm	3410 lm	3244 lm
BAC	604 lm	598 lm	569 lm	717 lm	709 lm	675 lm	1037 lm	1027 lm	977 lm	1333 lm	1320 lm	1256 lm	2309 lm	2286 lm	2175 lm
FLE	605 lm	599 lm	570 lm	717 lm	710 lm	676 lm	1038 lm	1028 lm	978 lm	1334 lm	1321 lm	1257 lm	3255 lm	3223 lm	3066 lm
WUR	570 lm	565 lm	537 lm	679 lm	672 lm	640 lm	994 lm	984 lm	936 lm	1293 lm	1280 lm	1218 lm	2240 lm	2218 lm	2110 lm
FIS	924 lm	915 lm	871 lm	1100 lm	1089 lm	1036 lm	1608 lm	1592 lm	1515 lm	2088 lm	2067 lm	1967 lm	3618 lm	3582 lm	3408 lm
FRU	774 lm	766 lm	729 lm	930 lm	921 lm	877 lm	1403 lm	1389 lm	1321 lm	1879 lm	1861 lm	1770 lm	3255 lm	3223 lm	3066 lm


OPTIONAL ACCESSORY

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles	S10-BLE-80
Ovalzeichnerlinse Refractor for elliptical distribution Lentille ovalisante	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent	S10-SGL-80
Weichzeichnerglas Diffuser protection glass Verre effet flou	S10-WGL-80



Down to UGR ≤ 16 | up to 133 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI

FARBKARTEN | GEHÄUSE & KABEL
COLOUR CHARTS | HOUSING & CABLES

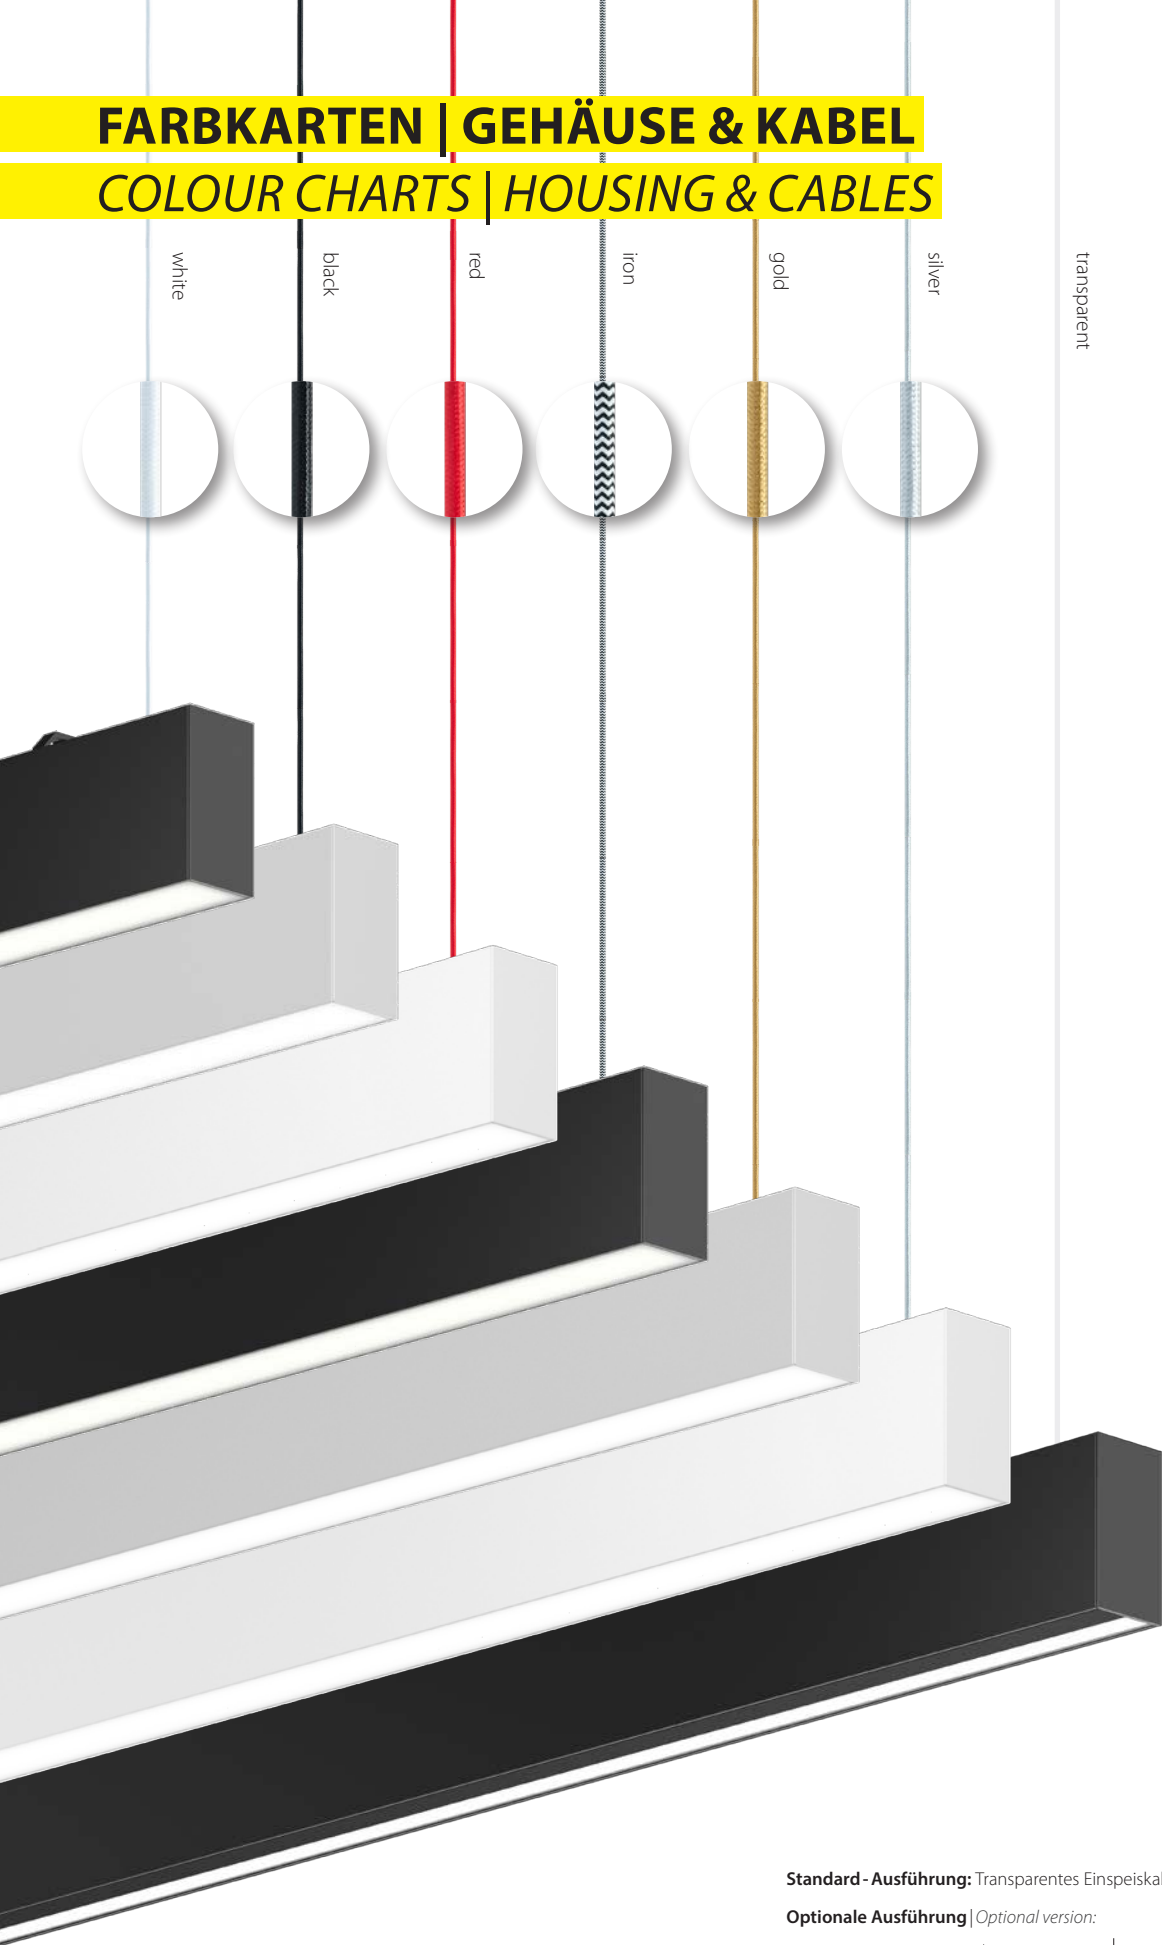

Standard - Ausführung: Transparentes Einspeiskabel | Standard version: Transparent suspension cable

Optionale Ausführung | Optional version:

Einspeiskabel
Suspension cable

1750 mm
5x0,75 mm²


▷ white	*-EIN-WHITE
▷ black	*-EIN-BLACK
▷ red	*-EIN-RED
▷ iron	*-EIN-IRON
▷ gold	*-EIN-GOLD
▷ silver	*-EIN-SILVER



RAL NACH WAHL | OPTIONALE GEHÄUSEFARBEN
RAL OF YOUR CHOICE | OPTIONAL HOUSING COLOURS



FARBKARTEN | RASTER, MASKEN & TUBI
COLOUR CHARTS | LOUVRES, MASKS & TUBES

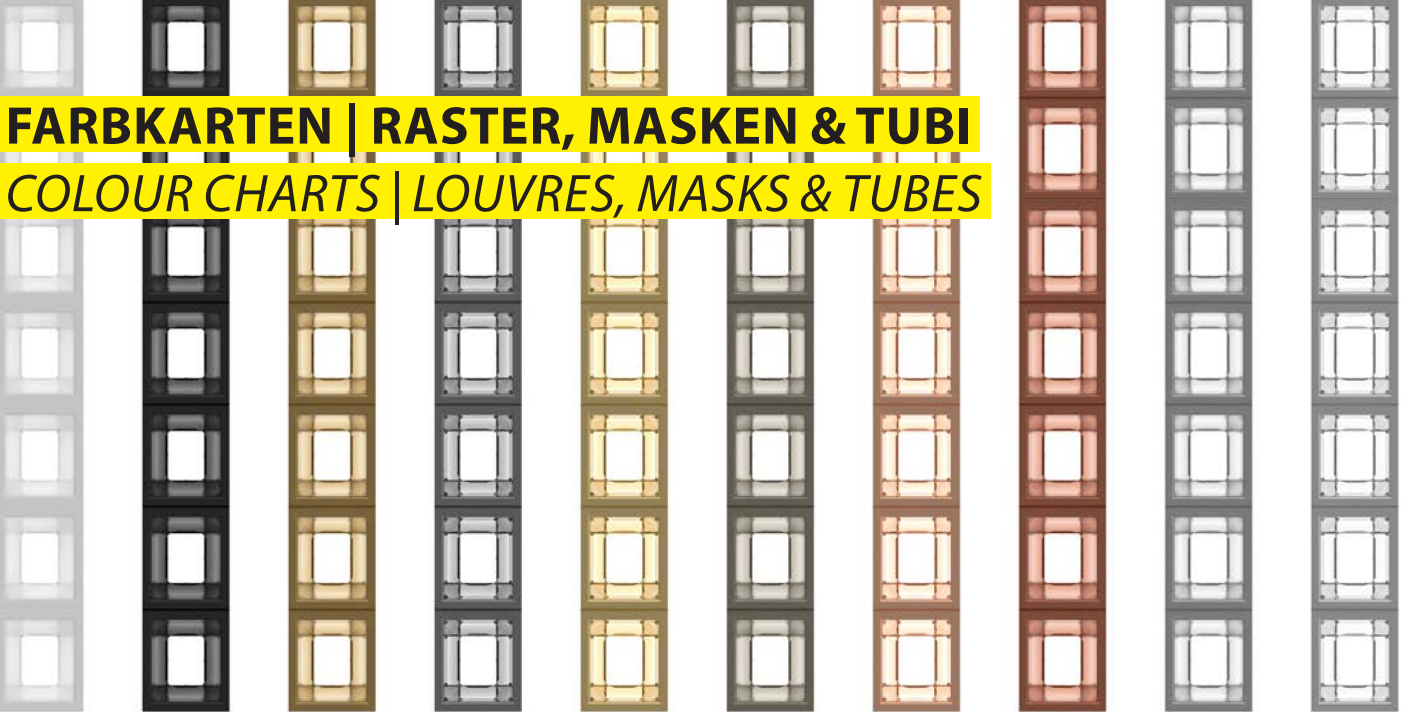

white 9019
black 9005
glaring gold
high-gloss black chrome
high-gloss gold
gunnery grey
high-gloss copper
capital copper
silver matte
high-gloss silver



NOTES

A large grid area for taking notes, consisting of 20 columns and 30 rows of small squares.

WICHTIGE HINWEISE

Dieser Katalog richtet sich ausschliesslich an gewerbliche Kunden. Die in diesem Katalog angegebenen Werte sind Bemessungswerte und unterliegen produktionsbedingten Toleranzen *. Alle angeführten Angaben – insbesondere Grössen-, Material-, Farb- und technische Angaben – entsprechen dem Stand zum Zeitpunkt des Drucks und dienen ausschliesslich zur Information. Der Herausgeber haftet nicht für Satz- und Druckfehler sowie für Abweichungen der Produkte von Abbildungen und Angaben. PLANLICHT behält sich vor, jederzeit ohne Ankündigung Änderungen an Produkten vor zu nehmen. Es gelten die Allgemeinen Geschäftsbedingungen der planlicht GmbH & Co KG, die unter WWW.PLANLICHT.COM/AGB-LANDING/ eingesehen werden können.

Technische Kennzahlen, angeführte Werte und die Piktogrammeleiste betreffen zumindest einen aber nicht zwingend alle Artikel der jeweiligen Leuchtenfamilie, exakte Angaben je Artikel finden Sie im Online-Katalog bzw. in PLANLICHT-Verkaufsbelegen und Datenblättern.

WEEE-Reg.-Nr. DE 54728470

* Leistung, Lichtstrom und Farbtemperatur unterliegen durch den Einsatz von elektronischen Bauteilen produktionsbedingten Toleranzen.
Toleranzen Leistung und Lichtstrom: +/- 10%. Toleranz Farbtemperatur: +/- 150 K. Lichtstrom dynamisch weiss bei 2700 K.

IMPORTANT REMARKS

*This catalogue is reserved for professionals only. The values published in this catalogue are rated values, which can slightly change for reasons related to the production process *. The published data such as dimensions, materials, colours and technical data are valid at time of printing, and exclusively provided for informational purposes. The editor takes no responsibility for typographical and print errors, as well as for any differences in the products, pictures and data. PLANLICHT reserves the right to change the products at any time and without any notice. The Terms and Conditions of planlicht GmbH & Co KG (available on WWW.PLANLICHT.COM/AGB-LANDING/) shall apply.*

Key technical specifications, listed values as well as the pictogram bar relate to at least one but not necessarily all items of the respective luminaire family, exact details for each item can be found in the online web catalogue or in PLANLICHT sales documents and data sheets.

* The power output, luminous flux and colour temperature can be slightly different due to specific electronic components used in the manufacturing process. The power output and luminous flux can differ by +/- 10%. The colour temperature can differ by +/- 150 K. Luminous flux dynamic white at 2700 K.



Allgemeine Geschäfts- und Lieferbedingungen
General Terms and Conditions
Conditions générales de vente et de livraison

REMARQUES IMPORTANTES

*Ce catalogue est exclusivement destiné aux professionnels. Les valeurs publiées dans ce catalogue sont des valeurs calculées, pouvant légèrement changer pour des raisons liées au processus de fabrication *. Les données techniques et autres informations (dimensions, matériaux, couleurs...) sont celles applicables au moment de l'impression du catalogue, et uniquement fournies à titre informatif. L'éditeur décline toute responsabilité en cas d'erreur de frappe, d'impression et pour tout autre différence concernant les produits, images et données publiées. PLANLICHT se réserve le droit de modifier les produits à sa discrétion, à tout moment et sans préavis. Les conditions générales de vente de planlicht GmbH & Co KG applicables sont consultables sur WWW.PLANLICHT.COM/AGB-LANDING/.*

Les caractéristiques techniques, les valeurs indiquées et la barre de pictogrammes concernent au moins un article de la famille de luminaires concernée, mais pas nécessairement tous. Vous trouverez des informations exactes par article dans le catalogue en ligne ou dans les documents de vente et les fiches techniques de PLANLICHT.

* La puissance, le flux lumineux et la température de couleur peuvent légèrement différer en raison de l'utilisation de composants électroniques spécifiques dans le processus de production. La puissance et le flux lumineux peuvent différer de +/- 10 %. La température de couleur peut différer de +/- 150 K. Flux lumineux blanc dynamique à 2700 K.

Webseite
Website
Site web



6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com
WWW.PLANLICHT.COM

IMPRINT

Publisher: planlicht GmbH & Co. KG, Vomp
Creative Concept: Katrin Atzinger
Graphic Design: Beatrice Praxmarer, Christoph Höflinger
© 2025

WWW.PLANLICHT.COM