planlicht

odelia

EDITION #1/2026

planlicht



Surface



Pendant



Wall



Track

odelia

ELEGANCE ALLROUND

ODELIA - PURE ELEGANCE

Inspiration

ODELIA FEATURES

ELEGANTES DESIGN
Ikonisches uni- oder zweifarbiges Design mit speziellem Rahmen.

Elegant design

ENERGIEEFFIZIENZ
Die Leuchte bietet eine sehr hohe Lichtleistung bei geringem Stromverbrauch.

Energy efficiency

DIREKT / INDIREKTE BELEUCHTUNG
Die Leuchte ist auch mit aktivem indirektem Licht und passivem Aura-Effekt erhältlich.

Direct / indirect lighting

HOHER SEHKOMFORT
Perfekter Augenkomfort mit optionalen Mikroprismen-Diffusoren.

Eye comfort

CLICK & PLAY INSTALLATION
Einfach das Gehäuse mit einem Klick auf den Baldachin drücken!

Click & Play installation

SCHMUTZ- UND INSEKTENSCHUTZ
Die Leuchte ist vor Staub und Insekten geschützt.

Dust & insects proof

DYNAMISCHES WEISS
Human Centric Lighting mit einstellbarem Weißlicht von 2.700 bis 6.500 Kelvin.

Dynamic white

INTEGRIERTER SENSOR (OPTIONAL)
Integrierte Tageslicht- und Bewegungssensoren.

Integrated sensor (optional)

UNTERSCHIEDLICHE GRÖSSEN | *DIFFERENT SIZES*

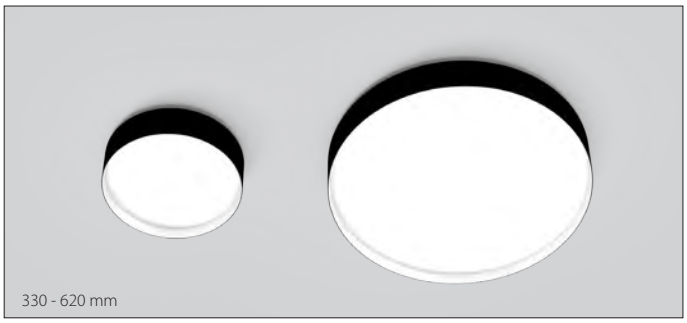

VERSCHIEDENE ABHÄNGUNGEN | *VARIOUS SUSPENSIONS*

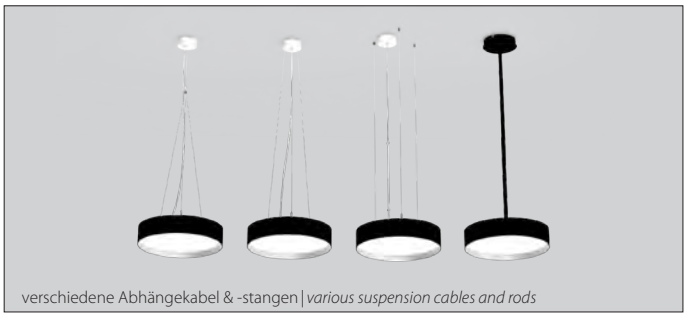
verschiedene Abhängekabel & -stangen | *various suspension cables and rods*

FARBKOMBINATIONEN | *COLOUR COMBINATIONS*

Wählen Sie Ihre Wunschfarbe | *Select your desired colour*

ODELIA PROJEKTE
ODELIA PROJECTS

INSPIRATION

Produkt: odelia

INSPIRATION

Product: odelia

LICHT NL OFFICE | NIEDERLANDE

Produkt: odelia

LICHT NL OFFICE | NETHERLANDS

Product: odelia

INSPIRATION

Produkt: odelia

INSPIRATION

Product: odelia

odelia

Aufbauleuchte
Surface luminaire

❶ SIZE

ø 330 mm (direct only)	**033**
ø 420 mm	**042**
ø 620 mm	**062**

❷ COLOUR

silver - silver	**SISI**
black - silver	**SWSI**
capital copper - black	**CCSW**
glaring gold - black	**DDSW**
black - black	**SWSW**
capital copper - white	**RRWS**
glaring gold - white	**DDWS**
black - white	**SWWS**
white - white	**WSWS**
RAL of your choice	

housing | *Gehäuse*
decorative ring | *Zier-Ring*

❸ DIRECT / INDIRECT

direct	**1**
direct / indirect	**2**

❹ LED

3000 K, CRI > 80	**830**
4000 K, CRI > 80	**840**
3000 K, CRI > 90	**930**
4000 K, CRI > 90	**940**
2700 - 6500 K dynamic white, CRI > 90	**HCL**

❺ OUTPUT / CONTROL

low output non-dim	**L1**
low output DALI	**L3**
high output DALI	**H3**
very high output DALI	**V3**
dynamic white	**X3**

❻ OPTIC

satiné	**S**
microprism*	**M**
extra comfort*	**E**

** UGR-optimised, configure online*

F54A❶-❷F❸❹❺❻

F54A**042** - SISIF**1830V3S** ø 420 mm, silver decorative ring, silver housing, IP50, direct, 3000 K, CRI > 80, very high output DALI, satiné (order sample)

➤ *Configure online on KATALOG.PLANLICHT.COM*

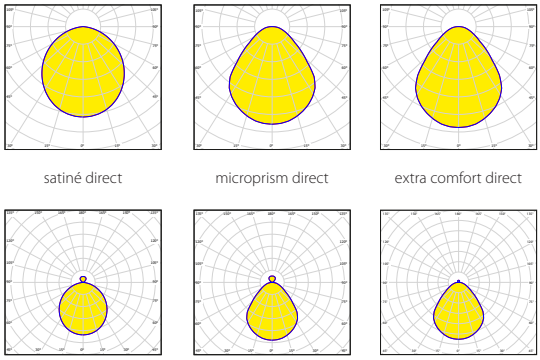

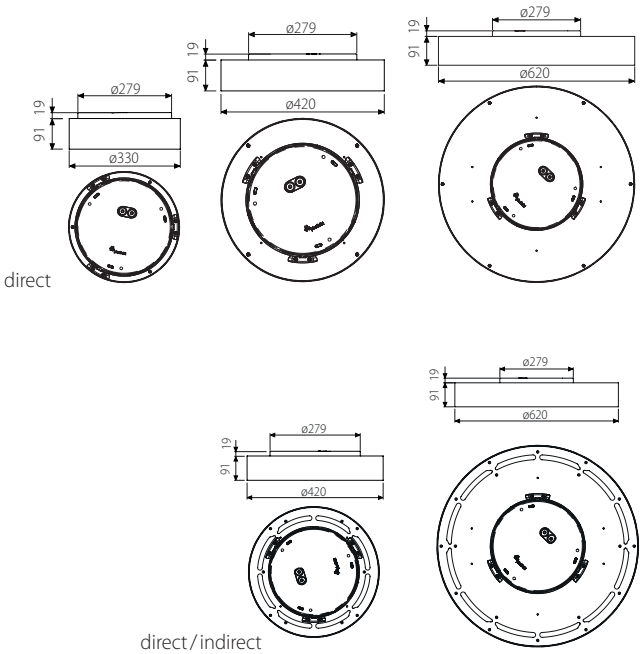

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	direct				direct / indirect			
4000 K satiné	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90
ø 330 mm	885 lm / 7,4 W	2036 lm / 15 W	2524 lm / 18,5 W	1578 lm / 15 W	-	-	-	-
ø 420 mm	1550 lm / 11,5 W	3067 lm / 22 W	3865 lm / 28 W	2377 lm / 22 W	1687 lm / 11,5 W	3333 lm / 22 W	4145 lm / 28 W	2583 lm / 22 W
ø 620 mm	3385 lm / 22 W	6207 lm / 40 W	7884 lm / 51 W	4592 lm / 40 W	3587 lm / 22 W	6502 lm / 40 W	8320 lm / 51 W	4810 lm / 40 W

COMPARE COVER Ø 420 MM, 4000 K, CRI > 80, LOW OUTPUT

	direct	direct / indirect
satiné	1550 lm	1687 lm
microprism	1401 lm	1542 lm
extra comfort	1708 lm	1817 lm

WEIGHT KG	direct	direct / indirect
ø 330 mm	2,3 kg	-
ø 420 mm	3,0 kg	3,1 kg
ø 620 mm	5,1 kg	5,5 kg

(based on optic S, DALI)

Die angegebenen Lichtstromwerte (lm) beziehen sich auf Leuchten mit einem weißen Gehäuse (RAL 9016). Je nach Gehäusefarbe reduzieren sich diese entsprechend.
All figures of luminous flux (lm) are for fixtures with white housing (RAL 9016). Depending on the housing colour, the luminous flux is reduced accordingly.

NOTLICHTTAUGLICHE VARIANTE ERHÄLTLICH | *EMERGENCY LIGHTING AVAILABLE*

Erstladung	*Initial charging*	Schnellladung	*Quick charging*	Erhaltungsladung	*Trickle charging*
1,5 W		1,5 W		1,5 W	

Down to UGR ≤ 19 | up to 166 lm / W | IEC 62471: Blue light hazard: RG 0 | push DALI switchDIM

odelia

Hängeleuchte
Pendant luminaire

❶ SUSPENSION STYLE

Rope vertical	**H**
Rope centrally bundled	**Y**
Rope centrally merging	**Z**
Rod centralized	**P**

❷ SIZE

ø 330 mm	**033**
ø 420 mm	**042**
ø 620 mm	**062**

❸ COLOUR

silver - silver	**SISI**
black - silver	**SWSI**
capital copper - black	**RRSW**
glaring gold - black	**DDSW**
black - black	**SWSW**
capital copper - white	**RRWS**
glaring gold - white	**DDWS**
black - white	**SWWS**
white - white	**WSWS**
RAL of your choice	

housing | *Gehäuse*
decorative ring | *Zier-Ring*

❹ DIRECT / INDIRECT

direct	**1**
direct / indirect	**2**

❺ LED

3000 K, CRI > 80	**830**
4000 K, CRI > 80	**840**
3000 K, CRI > 90	**930**
4000 K, CRI > 90	**940**
2700 - 6500 K dynamic white, CRI > 90	**HCL**

❻ OUTPUT / CONTROL

low output non-dim	**L1**
low output DALI	**L3**
high output DALI	**H3**
very high output DALI	**V3**
dynamic white	**X3**

❼ OPTIC

satiné	**S**
microprism*	**M**
extra comfort*	**E**

** UGR-optimised, configure online*

F54❶❷-❸F❹❺❻❼

F54**Z042**-**WSWS**F**1840H3S** pendant, central merging, ø 420 mm, white decorative ring, white housing IP 50, direct, 4000 K, CRI > 80, high output DALI, satiné (order sample)

➤ *Configure online on KATALOG.PLANLICHT.COM*

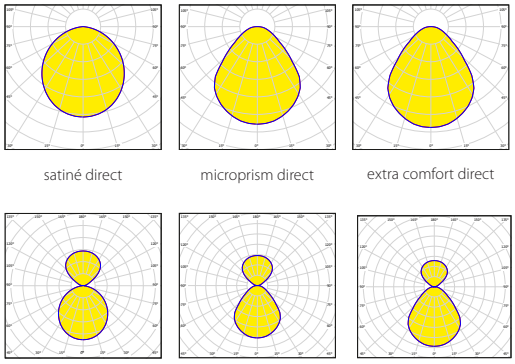

satiné direct | microprism direct | extra comfort direct

satiné direct/indirect | microprism direct/indirect | extra comfort direct/indirect

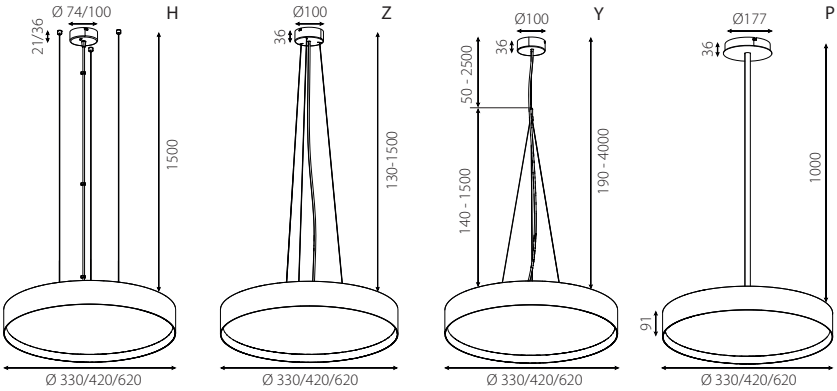

Rod standard 1 m, longer on request.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	direct				direct / indirect			
4000 K satiné	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90
ø 330 mm	885 lm / 7,4 W	2036 lm / 15 W	2524 lm / 18,5 W	1578 lm / 15 W	1276 lm / 10 W	2911 lm / 22 W	3507 lm / 28 W	2256 lm / 22 W
ø 420 mm	1550 lm / 11,5 W	3067 lm / 22 W	3865 lm / 28 W	2377 lm / 22 W	2453 lm / 17 W	4897 lm / 33 W	6038 lm / 41 W	3795 lm / 33 W
ø 620 mm	3385 lm / 22 W	6207 lm / 40 W	7884 lm / 51 W	4592 lm / 40 W	5278 lm / 33 W	9526 lm / 59 W	11836 lm / 76 W	7047 lm / 57 W

COMPARE COVER Ø 420 MM

	direct				direct / indirect			
4000 K satiné	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90
satiné	1550 lm	3067 lm	3865 lm	2377 lm	2453 lm	4897 lm	6038 lm	3795 lm
microprism	1401 lm	2793 lm	3506 lm	2164 lm	2330 lm	4659 lm	5808 lm	3610 lm
extra comfort	1708 lm	3405 lm	4274 lm	2638 lm	2637 lm	5271 lm	6576 lm	4084 lm

WEIGHT

	direct	direct / indirect
ø 330 mm	H / Y / Z: 2,7 kg / P: 3,6 kg	H / Y / Z: 2,8 kg / P: 3,8 kg
ø 420 mm	H / Y / Z: 3,4 kg / P: 4,3 kg	H / Y / Z: 3,7 kg / P: 4,6 kg
ø 620 mm	H / Y / Z: 5,5 kg / P: 6,4 kg	H / Y / Z: 6,3 kg / P: 7,2 kg

(based on optic S, DALI)

Die angegebenen Lichtstromwerte (lm) beziehen sich auf Leuchten mit einem weißen Gehäuse (RAL 9016). Je nach Gehäusefarbe und Durchmesser reduzieren sich diese entsprechend.
All figures of luminous flux (lm) are for fixtures with white housing (RAL 9016). Depending on the housing colour and diameter, the luminous flux is reduced accordingly.

NOTLICHTTAUGLICHE VARIANTE ERHÄLTLICH | *EMERGENCY LIGHTING AVAILABLE*

Erstladung | *Initial charging*	Schnellladung | *Quick charging*	Erhaltungsladung | *Trickle charging*
1,5 W	1,5 W	1,5 W

Down to UGR ≤ 16 | up to 165 lm / W | IEC 62471: Blue light hazard: RG 0 | DALI push switchDIM

odelia

Wandleuchte
Wall luminaire

1 SIZE

ø 330 mm (direct only)	**033**
ø 420 mm	**042**
ø 620 mm	**062**

2 COLOUR

silver - silver	**SISI**
black - silver	**SWSI**
capital copper - black	**RRSW**
glaring gold - black	**DDSW**
black - black	**SWSW**
capital copper - white	**RRWS**
glaring gold - white	**DDWS**
black - white	**SWWS**
white - white	**WSWS**
RAL of your choice	

Gehäuse | *housing*
Zier-Ring | *decorative ring*

3 DIRECT / INDIRECT

direct	**1**
direct / indirect	**2**

4 LED

3000 K, CRI > 80	**830**
4000 K, CRI > 80	**840**
3000 K, CRI > 90	**930**
4000 K, CRI > 90	**940**
2700 - 6500 K dynamic white, CRI > 90	**HCL**

5 OUTPUT / CONTROL

low output non-dim	**L1**
low output DALI	**L3**
high output DALI	**H3**
very high output DALI	**V3**
dynamic white	**X3**

F54W❶-❷F❸❹❺S

F54W**042**-**SISI**F**1830V3**S — wall, ø 420 mm, silver decorative ring, silver housing, IP 50, direct, 3000 K, CRI > 80, very high output DALI, satiné (order sample)

➤ *Configure online on KATALOG.PLANLICHT.COM*



satiné direct



satiné direct/indirect

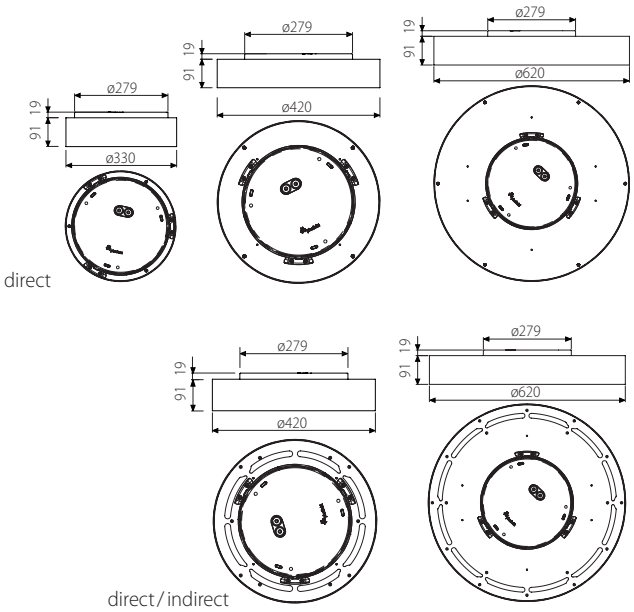

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	direct				direct / indirect			
	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90
ø 330 mm	885 lm / 7,4 W	2036 lm / 15 W	2524 lm / 18,5 W	1578 lm / 15 W	-	-	-	-
ø 420 mm	1550 lm / 11,5 W	3067 lm / 22 W	3865 lm / 28 W	2377 lm / 22 W	1687 lm / 11,5 W	3333 lm / 22 W	4145 lm / 28 W	2583 lm / 22 W
ø 620 mm	3385 lm / 22 W	6207 lm / 40 W	7884 lm / 51 W	4592 lm / 39 W	3587 lm / 22 W	6502 lm / 40 W	8320 lm / 51 W	4810 lm / 40 W

WEIGHT KG	direct	direct / indirect
ø 330 mm	2,3 kg	-
ø 420 mm	3,0 kg	3,1 kg
ø 620 mm	5,1 kg	5,5 kg

Die angegebenen Lichtstromwerte (lm) beziehen sich auf Leuchten mit einem weißen Gehäuse (RAL 9016). Je nach Gehäusefarbe und Durchmesser reduzieren sich diese entsprechend.

All figures of luminous flux (lm) are for fixtures with white housing (RAL 9016). Depending on the housing colour and diameter, the luminous flux is reduced accordingly.

UGR ≤ 19 | up to 163 lm / W | IEC 62471: Blue light hazard: RG 0 | DALI push switchDIM

odelia

3-Phasen-Leuchte
Track mounted luminaire

❶ SIZE

ø 330 mm (direct only)	**033**
ø 420 mm	**042**
ø 620 mm	**062**

❷ HOUSING COLOUR

silver - silver	**SISI**
black - silver	**SWSI**
capital copper - black	**RRSW**
glaring gold - black	**DDSW**
black - black	**SWSW**
capital copper - white	**RRWS**
glaring gold - white	**DDWS**
black - white	**SWWS**
white - white	**WSWS**
RAL of your choice	

housing | *Gehäuse*
decorative ring | *Zier-Ring*

❸ DIRECT / INDIRECT

direct	**1**
direct / indirect	**2**

❹ LED

3000 K, CRI > 80	**830**
4000 K, CRI > 80	**840**
3000 K, CRI > 90	**930**
4000 K, CRI > 90	**940**
2700 - 6500 K dynamic white, CRI > 90	**HCL**

❺ OUTPUT

low output	**L**
high output	**H**
very high output	**V**
dynamic white	**X**

❻ CONTROL

non-dim (low output only)	**1**
LKM DALI / DALI Stucchi OneTrack / Global Pulse	**G**

❼ OPTIC

satiné	**S**
microprism*	**M**
extra comfort UGR < 19* (low output only)	**E**

** UGR-optimised, configure online*

F54S❶-❷F❸❹❺❻❼

F54S**042**-**SISIF2830VG**S — track, ø 420 mm, silver decorative ring, silver housing, IP50, direct & indirect, 3000 K, CRI > 80, very high output, LKM DALI / DALI Stucchi OneTrack / Global Pulse, satiné (order sample)

➤ *Configure online on KATALOG.PLANLICHT.COM*

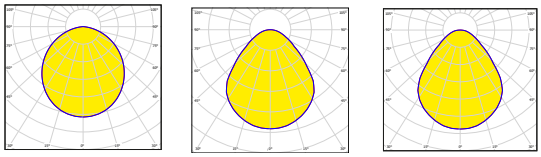

satiné direct | microprism direct | extra comfort

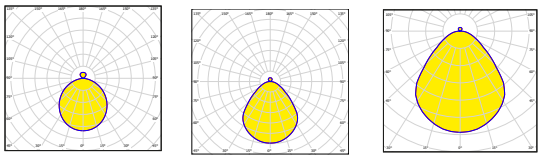

satiné direct/indirect | microprism direct / indirect | extra comfort direct / indirect



LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	direct				direct / indirect			
4000 K satiné	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90	low output CRI > 80	high output CRI > 80	very high output CRI > 80	dynamic white CRI > 90
ø 330 mm	885 lm / 7,4 W	2036 lm / 15 W	2524 lm / 18,5 W	1578 lm / 15 W	-	-	-	-
ø 420 mm	1550 lm / 11,5 W	3067 lm / 22 W	3865 lm / 28 W	2377 lm / 22 W	1687 lm / 11,5 W	3333 lm / 22 W	4145 lm / 28 W	2583 lm / 22 W
ø 620 mm	3385 lm / 22 W	6207 lm / 40 W	7884 lm / 51 W	4592 lm / 40 W	3587 lm / 22 W	6502 lm / 40 W	8320 lm / 51 W	4810 lm / 40 W

COMPARE COVER Ø 420 MM, 4000 K, CRI > 80, LOW OUTPUT

	direct	direct / indirect
satiné	1550 lm	1687 lm
microprism	1401 lm	1542 lm
extra comfort	1708 lm	1817 lm

WEIGHT

	direct	direct / indirect
ø 330 mm	2,6 kg	-
ø 420 mm	3,3 kg	3,4 kg
ø 620 mm	5,4 kg	5,8 kg

(based on optic S, DALI)

Die angegebenen Lichtstromwerte (lm) beziehen sich auf Leuchten mit einem weißen Gehäuse (RAL 9016). Je nach Gehäusefarbe reduzieren sich diese entsprechend.
All figures of luminous flux (lm) are for fixtures with white housing (RAL 9016). Depending on the housing colour, the luminous flux is reduced accordingly.

Down to UGR ≤ 19 | up to 166 lm / W | IEC 62471: Blue light hazard: RG 0 | DALI

FARBKARTEN | GEHÄUSE & KABEL

COLOUR CHARTS | HOUSING & CABLES

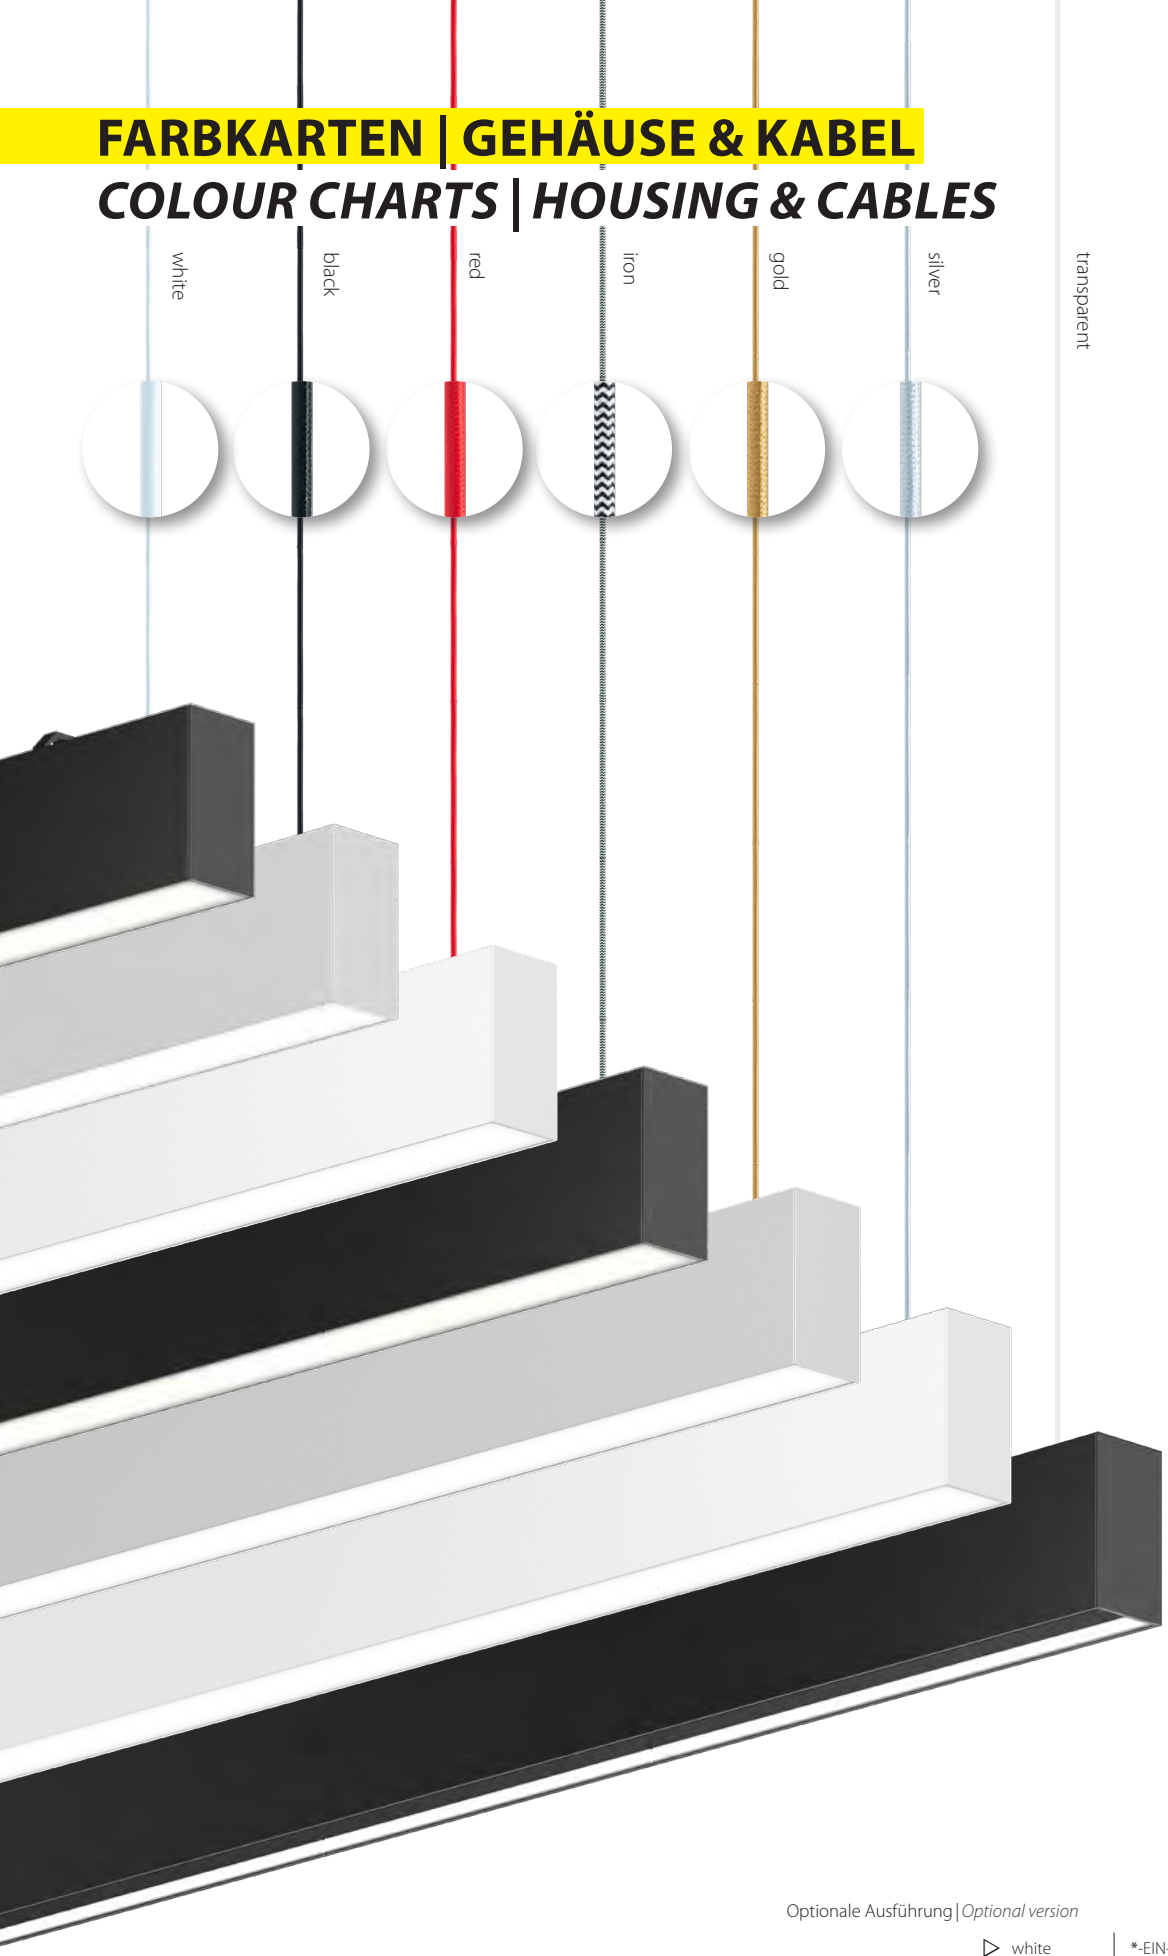

Optionale Ausführung | *Optional version*

Einspeiskabel
Suspension cable

1750 mm
5 x 0,75 mm²

white	*-EIN-WHITE
black	*-EIN-BLACK
red	*-EIN-RED
iron	*-EIN-IRON
gold	*-EIN-GOLD
silver	*-EIN-SILVER

Transparentes Kabel inkl. (Standard Version) | *Transparent cable included (standard version)*

für besondere Anfragen | *for special requests*

RAL NACH WAHL | OPTIONALE GEHÄUSEFARBEN

RAL OF YOUR CHOICE | OPTIONAL HOUSING COLOURS

RAL FARBEN

RAL 1001	RAL 1003	RAL 1004	RAL 1013	RAL 1014	RAL 1015	RAL 1016	RAL 1018	RAL 1019	RAL 1021
RAL 1023	RAL 1035	RAL 1036	RAL 2000	RAL 2001	RAL 2003	RAL 2008	RAL 2009	RAL 3000	RAL 3002
RAL 3003	RAL 3009	RAL 3011	RAL 3013	RAL 3016	RAL 3018	RAL 3020	RAL 3031	RAL 3032	RAL 3033
RAL 4005	RAL 4010	RAL 4011	RAL 4012	RAL 5002	RAL 5004	RAL 5010	RAL 5012	RAL 5013	RAL 5018
RAL 5023	RAL 5024	RAL 5025	RAL 5026	RAL 6013	RAL 6014	RAL 6017	RAL 6018	RAL 6019	RAL 6027
RAL 6034	RAL 7001	RAL 7004	RAL 7006	RAL 7011	RAL 7012	RAL 7013	RAL 7015	RAL 7016	RAL 7021
RAL 7022	RAL 7024	RAL 7030	RAL 7031	RAL 7032	RAL 7035	RAL 7037	RAL 7038	RAL 7039	RAL 7043
RAL 7044	RAL 7047	RAL 7048	RAL 8003	RAL 8011	RAL 8012	RAL 8016	RAL 8017	RAL 8019	RAL 8024
RAL 8024	RAL 8029	RAL 9001	RAL 9002	RAL 9011	RAL 9017	RAL 9022			
							Gunnery **GREY**	Capital **COPPER**	Glaring **GOLD**

FARBKARTEN | DIFFUSOREN & OPTIKEN
COLOUR CHARTS | DIFFUSERS & OPTICS

WICHTIGE HINWEISE

Dieser Katalog richtet sich ausschliesslich an gewerbliche Kunden. Die in diesem Katalog angegebenen Werte sind Bemessungswerte und unterliegen produktionsbedingten Toleranzen*. Alle angeführten Angaben – insbesondere Grössen-, Material-, Farb- und technische Angaben – entsprechen dem Stand zum Zeitpunkt des Drucks und dienen ausschliesslich zur Information. Der Herausgeber haftet nicht für Satz- und Druckfehler sowie für Abweichungen der Produkte von Abbildungen und Angaben. PLANLICHT behält sich vor, jederzeit ohne Ankündigung Änderungen an Produkten vor zu nehmen. Es gelten die Allgemeinen Geschäftsbedingungen der planlicht GmbH & Co KG, die unter WWW.PLANLICHT.COM/AGB-LANDING/ eingesehen werden können.

Technische Kennzahlen, angeführte Werte und die Piktogrammleiste betreffen zumindest einen aber nicht zwingend alle Artikel der jeweiligen Leuchtenfamilie, exakte Angaben je Artikel finden Sie im Online-Katalog bzw. in PLANLICHT-Verkaufsbelegen und Datenblättern.

WEEE-Reg.-Nr. DE 54728470

* Leistung, Lichtstrom und Farbtemperatur unterliegen durch den Einsatz von elektronischen Bauteilen produktionsbedingten Toleranzen. Toleranzen Leistung und Lichtstrom: +/- 10%. Toleranz Farbtemperatur: +/- 150 K. Lichtstrom dynamisch weiss bei 2700 K.

IMPORTANT REMARKS

This catalogue is reserved for professionals only. The values published in this catalogue are rated values, which can slightly change for reasons related to the production process. The published data such as dimensions, materials, colours and technical data are valid at time of printing, and exclusively provided for informational purposes. The editor takes no responsibility for typographical and print errors, as well as for any differences in the products, pictures and data. PLANLICHT reserves the right to change the products at any time and without any notice. The Terms and Conditions of planlicht GmbH & Co KG (available on WWW.PLANLICHT.COM/AGB-LANDING/) shall apply.*

Key technical specifications, listed values as well as the pictogram bar relate to at least one but not necessarily all items of the respective luminaire family, exact details for each item can be found in the online web catalogue or in PLANLICHT sales documents and data sheets.

** The power output, luminous flux and colour temperature can be slightly different due to specific electronic components used in the manufacturing process. The power output and luminous flux can differ by +/- 10%. The colour temperature can differ by +/- 150 K. Luminous flux dynamic white at 2700 K.*

RELEVANTE INFORMATIONEN AUF EINEN BLICK

- Allgemeine Geschäfts- & Lieferbedingungen – Die Grundlage unserer Zusammenarbeit
- Garantie 66 – Das Qualitätsversprechen im Detail
- Technische Hinweise – Wichtige Informationen zur Planung
- Produktseiten – So lesen Sie unsere Übersichten
- Artikelnummer – Die Logik hinter dem Code
- Piktogramme – Die Symbole und ihre Bedeutung

RELEVANT INFORMATION AT A GLANCE

- *Terms & Conditions – The Basis of Our Cooperation*
- *Guarantee 66 – Our Commitment to Quality*
- *Technical Notes – Essential Guidance for Planning*
- *Product Pages – How to Read Our Overviews*
- *Article Number – The Logic Behind the Code*
- *Pictograms – The Meaning Behind the Symbols*

SENSORS
IN LEUCHTE VERBAUT | *INSTALLED IN LUMINAIRE*

IMPRINT
Publisher: planlicht GmbH & Co. KG, Vomp
Creative Concept: Katrin Atzinger
Graphic Design: Beatrice Praxmarer, Christoph Höflinger
Print: Kraler Druck, Vahrn (BZ)
© 2026

planlicht
6134 Vomp, Austria, Au 25
Tel. +43-5242-71608, Fax +43-5242-71283
info@planlicht.com
WWW.PLANLICHT.COM

WWW.PLANLICHT.COM

PLAN-FO-ODELIA-26