



**DIVA** 

 planlicht



diva

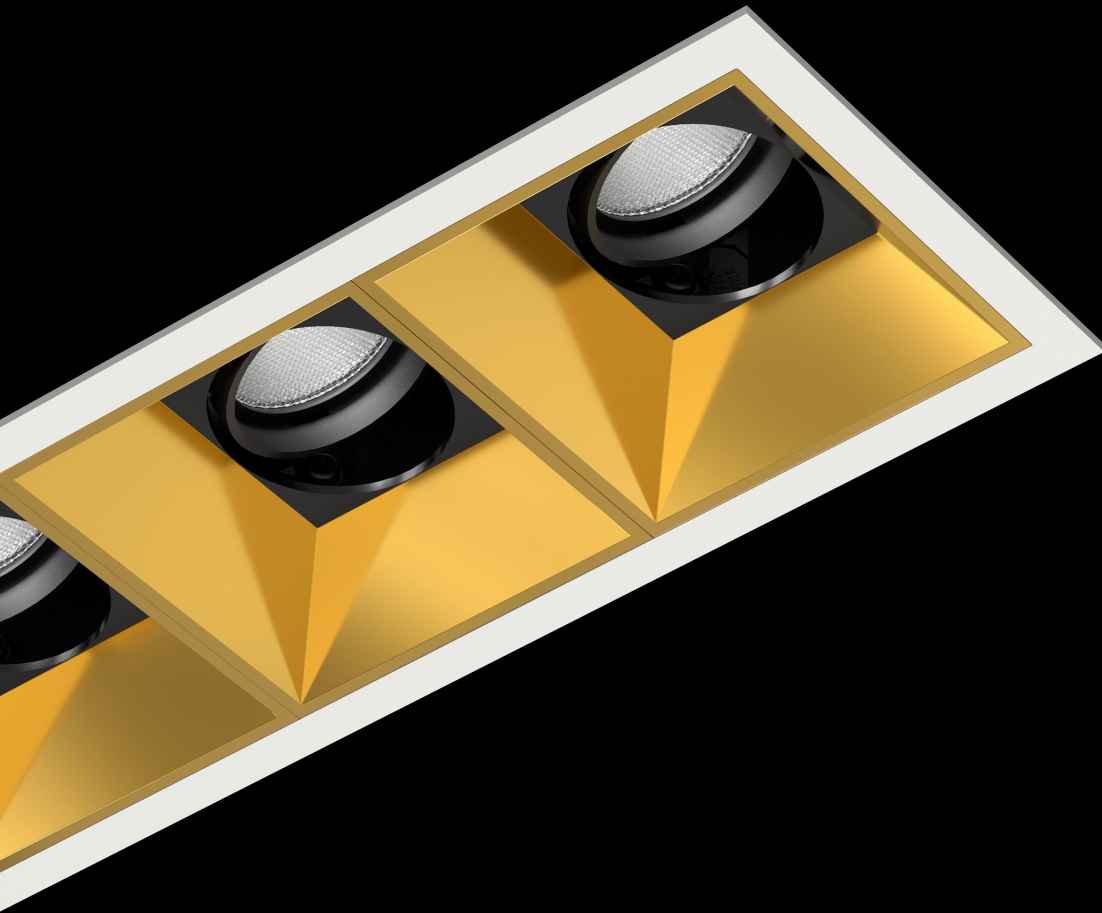


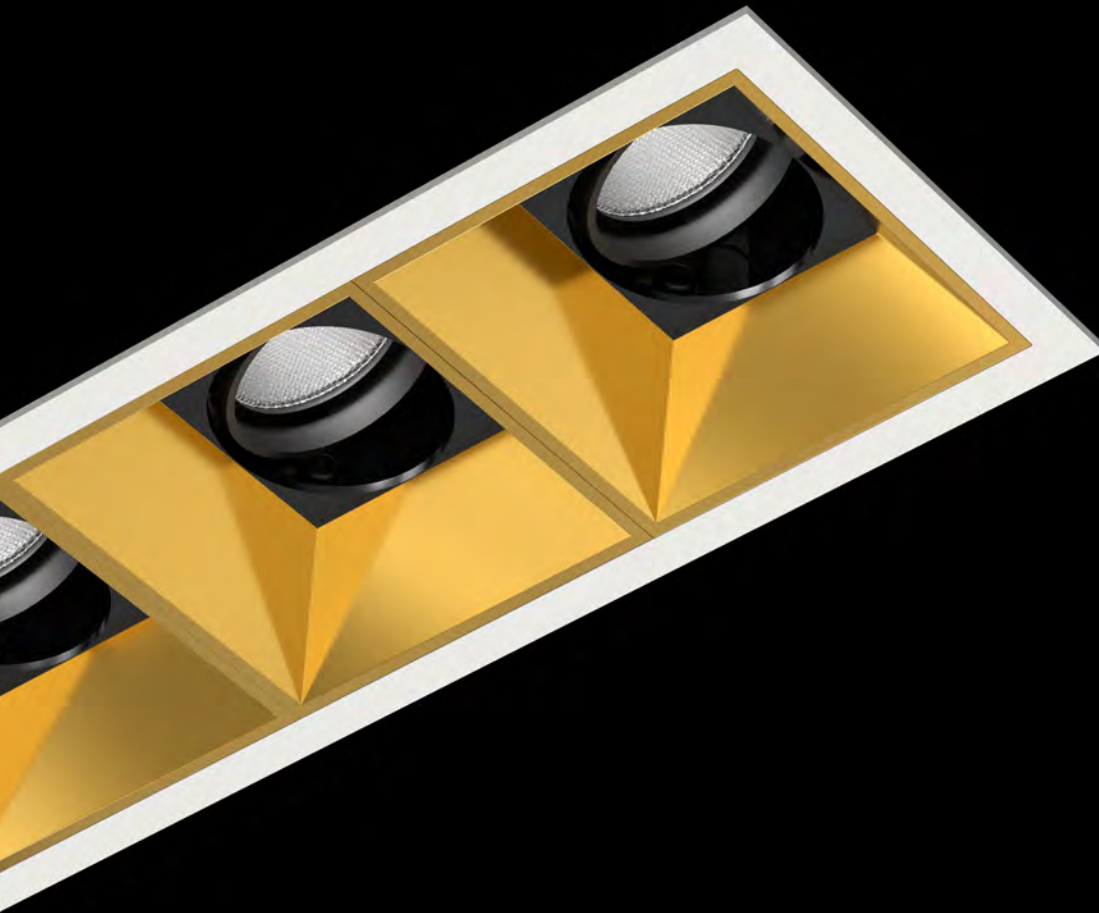

diva

**SPOTLIGHTS**

**ON!**



Recessed



## DIVA - SPOTLIGHTS ON!

---

Inspiration





### RUND & VIERECKIG

Das Spotlight ist in unterschiedlichen Formen erhältlich.

*Round & square*



### REFLEKTORTAUSCH

Der Sekundärreflektor kann ohne Werkzeug ausgetauscht werden.

*Reflector replacement*



### HOCHGLANZBESCHICHTUNG

Metallische Hochglanzbeschichtungen verleihen eine besondere Optik.

*Effect coatings*



### LED

Das Spotlight nutzt die neueste LED-Technologie der Generation.

*LED technology of the latest generation*

### NATÜRLICHE FARBWIEDERGABE

Der Farbwiedergabeindex (Ra > 90) dieser Leuchte bietet natürliche Farben.

*Natural color reproduction (CRI > 90)*



### BLENDFREI (UGR < 16 / 19)

Die ausgeklügelte Linsentechnologie bietet blendfreien Augenkomfort.

*Glare-free (UGR < 16 / 19)*



### 355° DREHBARKEIT

Das Spotlight kann individuell um bis zu 355° gedreht werden.

*355° swiveling*




### 30° SCHWENKBAR

Für den richtigen Fokus kann der Neigungswinkel bis zu 30° verstellt werden.


*30° tilt*




### UNTERSCHIEDLICHE GRÖSSEN | DIFFERENT SIZES

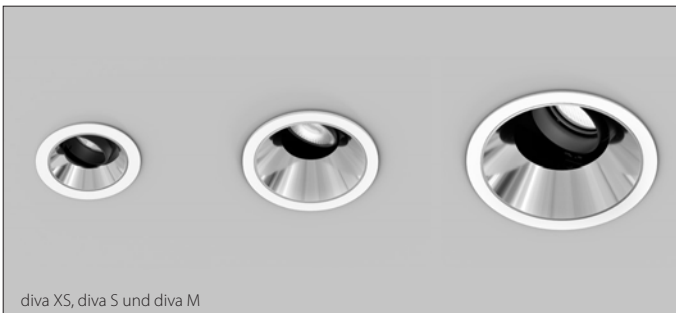




### VERSCHIEDENE FORMEN | VARIETY OF FORMS

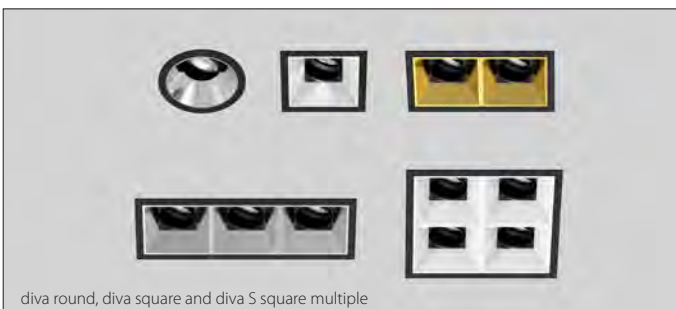

### FARBKOMBINATIONEN | COLOUR COMBINATIONS

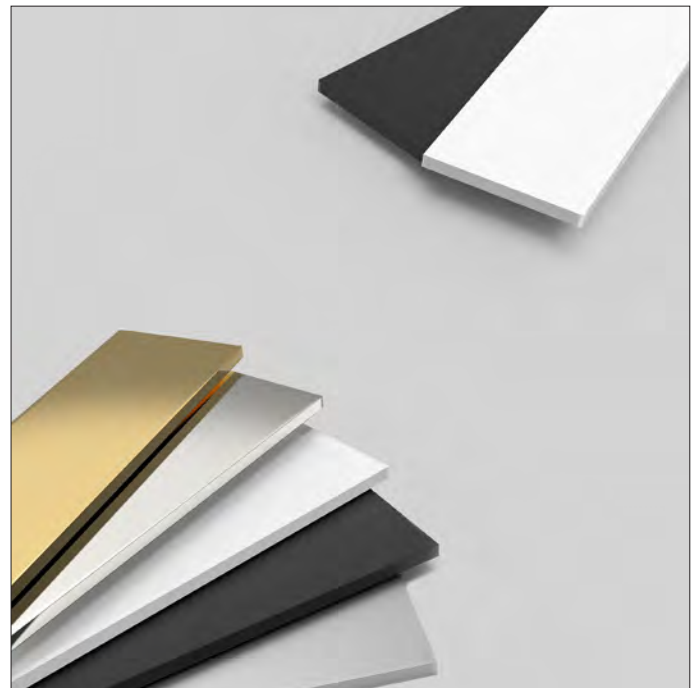

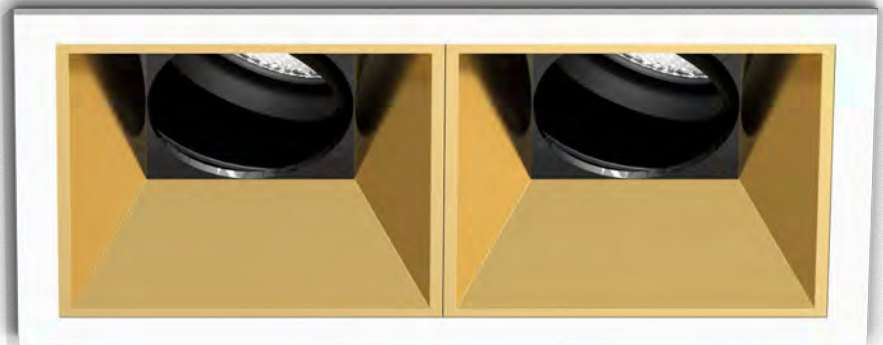

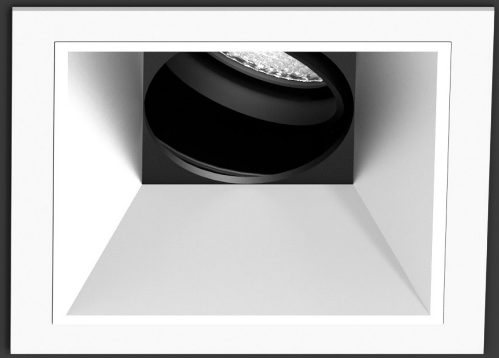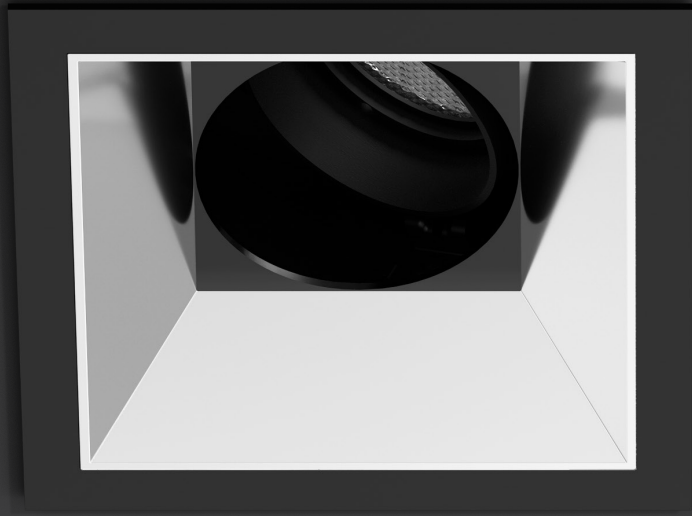

**DIVA PROJEKTE**  
**DIVA PROJECTS**




**INSPIRATION**

Produkt: diva





**INSPIRATION**

Product: diva









## 1 REFLECTOR COLOUR

	white matte	<b>W</b>
	black matte	<b>N</b>
	silver matte	<b>P</b>
	high-gloss silver	<b>B</b>




## 2 HOUSING COLOUR

	white	<b>WS</b>
	black	<b>SW</b>




## 3 LED

	3000 K, CRI > 90	<b>930</b>
	4000 K, CRI > 90	<b>940</b>

## 4 OUTPUT / CONTROL

	low output non-dim	<b>L1</b>
	high output non-dim	<b>H1</b>
	high output DALI	<b>H3</b>



## 5 BEAM

	18°	<b>1</b>
	24°	<b>2</b>
	35°	<b>3</b>

S42E060-N12C1345

S42E060-NBWSC1940H32 diva XS round, reflector high-gloss silver, housing white, IP 20, 4000K, CRI > 90, high output DALI, 24° (order sample)

► [Configure online on KATALOG.PLANLICHT.COM](https://www.planlicht.com)

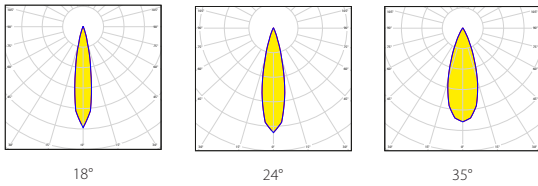


**CUT OUT**  
 ø 50 mm, ↑ 127 mm

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**


3000 K	low output (7,3W)		high output (9,6-10W)	0,2 kg
	Reflector high-gloss silver			
18°	540lm		692lm	
24°	566lm		726lm	
35°	536lm		687lm	

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

4000 K	low output (7,3W)		high output (9,6-10W)	0,2 kg
	Reflector high-gloss silver			
18°	562lm		720lm	
24°	589lm		755lm	
35°	558lm		715lm	



Down to UGR ≤ 16 | up to 81 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM





## 1 SIZE / SHAPE

diva S round	<b>078</b>
diva S square	<b>07Q</b>



## 2 REFLECTOR COLOUR

	white matte
	black matte
	silver matte
	high-gloss silver
	high-gloss gold

## 3 HOUSING COLOUR

	white	<b>WS</b>
	black	<b>SW</b>
		<b>W</b>
		<b>N</b>
		<b>P</b>
		<b>B</b>
		<b>G</b>




## 4 LED

	3000 K, CRI > 90	<b>930</b>
	4000 K, CRI > 90	<b>940</b>

## 5 OUTPUT / CONTROL

		low output non-dim
		high output non-dim
		high output DALI



## 6 BEAM

	24°	<b>2</b>
	42°	<b>4</b>
	50°	<b>5</b>
		<b>L1</b>
		<b>H1</b>
		<b>H3</b>


S42E 1-N 2 3 C1 4 5 6

S42E078-NGWSC1940H34 diva S round, reflector gold, housing white, IP20, 4000 K, CRI > 90, high output DALI, 42° (order sample)

► Configure online on [KATALOG.PLANLICHT.COM](http://KATALOG.PLANLICHT.COM)

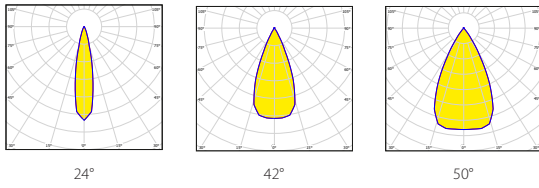

diva S square



diva S round



**CUT OUT**  
□ 68x68 mm, ↑ 148 mm

**CUT OUT**  
∅ 50 mm, ↑ 127 mm

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

3000 K Reflector high-gloss silver	low output (9,8W)	high output (13,5W)	0,3 kg
	24°	600 lm	
42°	664 lm	911 lm	
50°	632 lm	867 lm	

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

4000 K Reflector high-gloss silver	low output (9,8W)	high output (13,5W)	0,3 kg
	24°	653 lm	
42°	722 lm	991 lm	
50°	687 lm	943 lm	



Down to UGR ≤ 16 | up to 74 lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

# diva S square multiple





Einbaustrahler  
Recessed spotlight





## 1 SIZE / SHAPE

- 2** 134x68 mm
- 3** 198x68 mm
- 4** 134x134 mm

## 2 SECONDARY REFLECTOR COLOUR

- 014**  white matte
- 020**  black matte
- 14Q**  silver matte
-  high-gloss silver
-  high-gloss gold


## 3 HOUSING COLOUR

- W**  white **WS**
- N**  black **SW**
- P**
- B**
- G**







## 4 SPOTLIGHTS

- 2** 2 spots (014 only)
- 3** 3 spots (020 only)
- 4** 4 spots (14Q only)


## 5 LED

- 2**  3000 K, CRI > 90
- 3**  4000 K, CRI > 90

## 6 OUTPUT / CONTROL

- 930**   low output non-dim **L1**
- 940**   high output non-dim **H1**
-   high output DALI **H3**



## 7 BEAM

-  24° **2**
-  42° **4**
-  50° **5**


S42E**1-N**2**3**C**4**5**6**7

S42E020-NPWSC3940H34 diva S square, recessed, secondary reflector silver matte, housing white, IP20, 1 x 3 linear, 4000 K, CRI > 90, high output DALI, 42° (order sample)


► Configure online on [KATALOG.PLANLICHT.COM](http://KATALOG.PLANLICHT.COM)

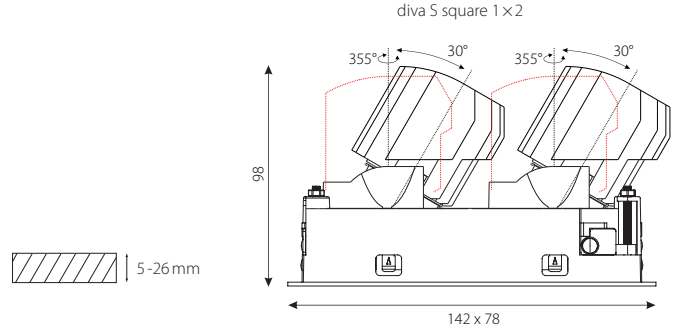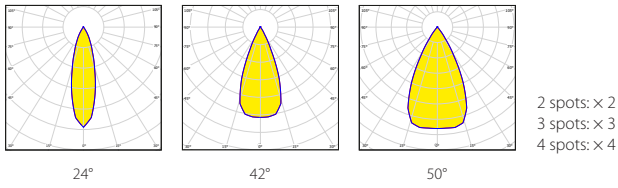

**CUT OUT** 0,9 kg  
diva S square (2 spots) | □ 134 x 68 mm, ↑ 148 mm

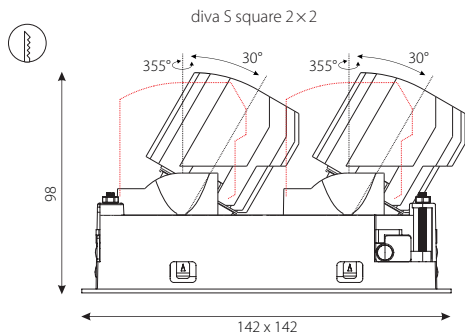

**CUT OUT** 1,7 kg  
diva S square (4 spots) | □ 134 x 134 mm, ↑ 148 mm

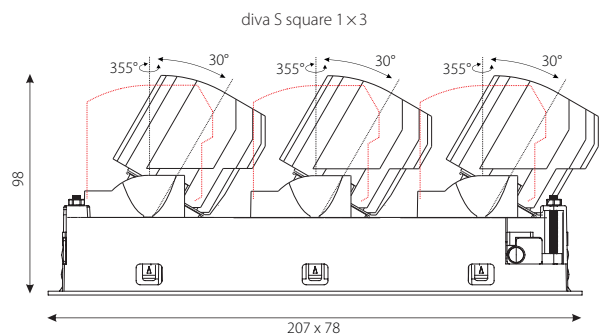

**CUT OUT** 1,3 kg  
diva S square (3 spots) | □ 198 x 68 mm, ↑ 148 mm

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**

3000 K (per spot)	Reflector high-gloss silver	
	low output (9,8W)	high output (13,5W)
24°	600lm	824lm
42°	664lm	911lm
50°	632lm	867lm

**LUMINOUS FLUX (LM) / SYSTEM POWER (W)**


4000 K (per spot)	Reflector high-gloss silver	
	low output (9,8W)	high output (13,5W)
24°	653lm	896lm
42°	722lm	991lm
50°	687lm	943lm



Down to UGR ≤ 16 | up to 74lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

# diva M

Einbaustrahler  
Recessed spotlight

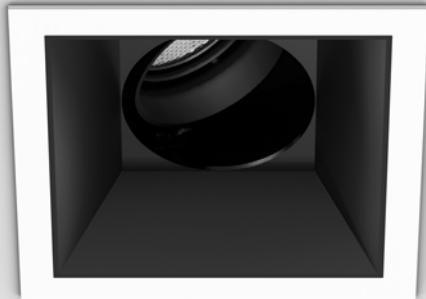

## 1 SIZE / SHAPE

diva M round	<b>110</b>
diva M square	<b>10Q</b>

## 2 REFLECTOR COLOUR

	white matte
	black matte
	silver matte
	silver matte asymmetric
	high-gloss silver
	high-gloss gold

## 3 HOUSING COLOUR

	white	<b>NW</b>	<b>WS</b>
	black	<b>NN</b>	<b>SW</b>
		<b>NP</b>	
		<b>PP</b>	
		<b>NB</b>	
		<b>NG</b>	

## 4 LED

	3000K, CRI > 90	<b>930</b>
	4000K, CRI > 90	<b>940</b>

## 5 OUTPUT / CONTROL

		low output non-dim
		high output non-dim
		high output DALI



## 6 BEAM

	27°	<b>2</b>
	42°	<b>4</b>
	50°	<b>5</b>
	asymmetric wallwasher (only silver matte, not rotatable or tiltable)	<b>A</b>


S42E **1-2-3-C1-4-5-6**

S42E110-NGWSC1940H34 diva M round, reflector gold, housing white, IP 20, 4000K, CRI > 90, high output DALI, 42° (order sample)



► [Configure online on KATALOG.PLANLICHT.COM](https://www.planlicht.com)

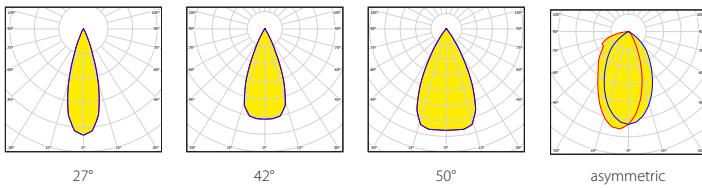

diva M square  
(asymmetric)



diva M round  
(asymmetric)



**LUMINOUS FLUX (LM) / SYSTEM POWER (W) DIVA M ROUND**

3000 K	low output (15W)	high output (21 W)
Reflector silver matte		
27°	1397lm	1955lm
42°	1413lm	1978lm
50°	1345lm	1883lm
asymmetric wallwasher	902lm	1263lm



0,5 kg

**LUMINOUS FLUX (LM) / SYSTEM POWER (W) DIVA AM ROUND**

4000 K	low output (15W)	high output (21 W)
Reflector silver matte		
24°	1503lm	2104lm
42°	1520lm	2129lm
50°	1477lm	2025lm
asymmetric wallwasher	971 lm	1359lm



0,5 kg

**NOTLICHTTAUGLICHE VARIANTE ERHÄLTlich | EMERGENCY LIGHTING AVAILABLE**

Erstladung   Initial charging	Schnellladung   Quick charging	Erhaltungsladung   Trickle charging
3,7W	4,1W	2,8W



Down to UGR ≤ 16 | up to 102lm/W | IEC 62471: Blue light hazard: RG ≤ 1 | DALI switchDIM

## WICHTIGE HINWEISE

Dieser Katalog richtet sich ausschliesslich an gewerbliche Kunden. Die in diesem Katalog angegebenen Werte sind Bemessungswerte und unterliegen produktionsbedingten Toleranzen\*. Alle angeführten Angaben – insbesondere Grössen-, Material-, Farb- und technische Angaben – entsprechen dem Stand zum Zeitpunkt des Drucks und dienen ausschliesslich zur Information. Der Herausgeber haftet nicht für Satz- und Druckfehler sowie für Abweichungen der Produkte von Abbildungen und Angaben. PLANLICHT behält sich vor, jederzeit ohne Ankündigung Änderungen an Produkten vor zu nehmen. Es gelten die Allgemeinen Geschäftsbedingungen der planlicht GmbH & Co KG, die unter WWW.PLANLICHT.COM/AGB-LANDING/ eingesehen werden können.

Technische Kennzahlen, angeführte Werte und die Piktogrammleiste betreffen zumindest einen aber nicht zwingend alle Artikel der jeweiligen Leuchtenfamilie, exakte Angaben je Artikel finden Sie im Online-Katalog bzw. in PLANLICHT-Verkaufsbelegen und Datenblättern.

WEEE-Reg.-Nr. DE 54728470

\* Leistung, Lichtstrom und Farbtemperatur unterliegen durch den Einsatz von elektronischen Bauteilen produktionsbedingten Toleranzen. Toleranzen Leistung und Lichtstrom: +/- 10%. Toleranz Farbtemperatur: +/- 150 K. Lichtstrom dynamisch weiss bei 2700 K.

## IMPORTANT REMARKS

*This catalogue is reserved for professionals only. The values published in this catalogue are rated values, which can slightly change for reasons related to the production process\*. The published data such as dimensions, materials, colours and technical data are valid at time of printing, and exclusively provided for informational purposes. The editor takes no responsibility for typographical and print errors, as well as for any differences in the products, pictures and data. PLANLICHT reserves the right to change the products at any time and without any notice. The Terms and Conditions of planlicht GmbH & Co KG (available on WWW.PLANLICHT.COM/AGB-LANDING/) shall apply.*

*Key technical specifications, listed values as well as the pictogram bar relate to at least one but not necessarily all items of the respective luminaire family, exact details for each item can be found in the online web catalogue or in PLANLICHT sales documents and data sheets.*

*\* The power output, luminous flux and colour temperature can be slightly different due to specific electronic components used in the manufacturing process. The power output and luminous flux can differ by +/- 10%. The colour temperature can differ by +/- 150K. Luminous flux dynamic white at 2700K.*

## RELEVANTE INFORMATIONEN AUF EINEN BLICK

- Allgemeine Geschäfts- & Lieferbedingungen – Die Grundlage unserer Zusammenarbeit
- Garantie 66 – Das Qualitätsversprechen im Detail
- Technische Hinweise – Wichtige Informationen zur Planung
- Produktseiten – So lesen Sie unsere Übersichten
- Artikelnummer – Die Logik hinter dem Code
- Piktogramme – Die Symbole und ihre Bedeutung



## RELEVANT INFORMATION AT A GLANCE

- Terms & Conditions – The Basis of Our Cooperation
- Guarantee 66 – Our Commitment to Quality
- Technical Notes – Essential Guidance for Planning
- Product Pages – How to Read Our Overviews
- Article Number – The Logic Behind the Code
- Pictograms – The Meaning Behind the Symbols

### IMPRINT

**Publisher:** planlicht GmbH & Co. KG, Vomp  
**Creative Concept:** Katrin Atzinger  
**Graphic Design:** Beatrice Praxmarer, Christoph Höflinger  
**Print:** Kraller Druck, Vahrn (BZ)  
© 2026



6134 Vomp, Austria, Au 25  
Tel. +43-5242-71608, Fax +43-5242-71283  
info@planlicht.com  
WWW.PLANLICHT.COM





**DIVA**



[WWW.PLANLICHT.COM](http://WWW.PLANLICHT.COM)